

LM39300/39301/39302

3A Low-Voltage Low-Dropout Regulator

General Description

The LM39300, LM39301, LM39302 are 3.0A LDO linear voltage regulators that provide a low voltage, high-current output with a minimum of external components. Utilizing proprietary Super β PNP pass element, the LM39300/39301/39302 offers extremely low dropout (typically 400mV at 3.0A) and low ground current (typically 36mA at 3.0A).

The LM39300/1/2 is ideal for PC add-in cards that need to convert from standard 3.3V to 2.5V or 2.5V to 1.8V. A guaranteed maximum dropout voltage of 500mV over all operating conditions allows the LM39300/1/2 to provide 2.5V from a supply as low as 3V, and 1.8V from a supply as low as 2.5V. The LM39300/1/2 also has fast transient response for heavy switching applications. The device requires only 47 μ F of output capacitance to maintain stability and achieve fast transient response

The LM39300/1/2 is fully protected with overcurrent limiting, thermal shutdown, reversed-battery protection, reversed-leakage protection, and reversed-lead insertion. The LM39301 offers a TTL-logic compatible enable pin and an error flag that indicates under voltage and over current conditions. Offered in fixed voltages, the LM39300/1/2 comes in the TO-220 and TO-263 packages and is an ideal upgrade to older, NPN-based linear voltage regulators.

The LM39302 is adjustable version.

Features

- 3.0A minimum guaranteed output current
- 500mV maximum dropout voltage over temperature
 - Ideal for 3.0V to 2.5V conversion**
 - Ideal for 2.5V to 1.8V conversion**
- 1% initial accuracy
- Low ground current
- Current limiting and Thermal shutdown
- Reversed-battery protection
- Reversed-leakage protection
- Fast transient response
- TO-263 and TO-220 packaging
- TTL/CMOS compatible enable pin (LM39301 only)
- Error flag output (LM39301 only)
- * Adjustable version (LM39302 only)

Applications

- LDO linear regulator for PC add-in cards
- High-efficiency linear power supplies
- SMPS post regulator
- Multimedia and PC processor supplies
- Low-voltage microcontrollers
- StrongARM™ processor supply


Ordering Information

Park Number	Junction Temp. Range	Package
LM39300T-X.X	-40°C to +125°C	3-lead TO-220
LM39300S-X.X	-40°C to +125°C	3-lead TO-263
LM39301T-X.X	-40°C to +125°C	5-lead TO-220
LM39301S-X.X	-40°C to +125°C	5-lead TO-263
LM39302T	-40°C to +125°C	5-lead TO-220
LM39302S	-40°C to +125°C	5-lead TO-263


Note: 1) X.X =fixed voltage output: 1.5V, 1.8V, 2.5V, 3.3V, 5.0V
2) LM39302: adjustable voltage




Typical Application

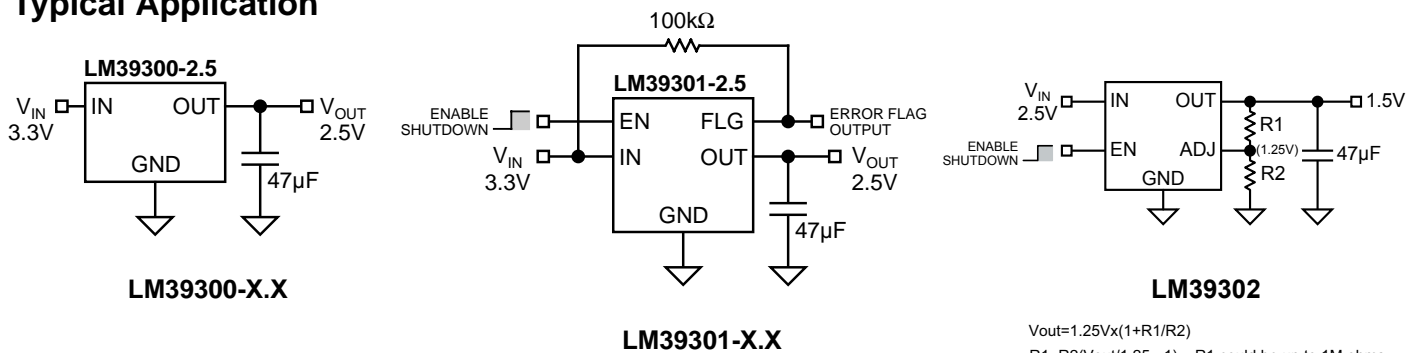


Pin Configuration

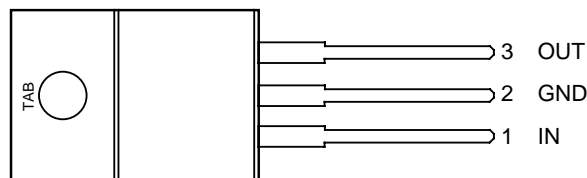


LM39300-x.xBT
TO-220-3 (T)

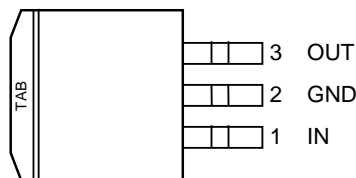

LM39300-x.xBU
TO-263-3 (U)

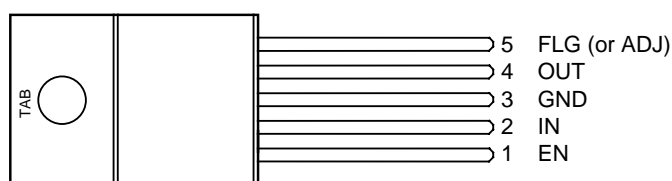

LM39301-x.x, LM39302BT
TO-220-5 (T)

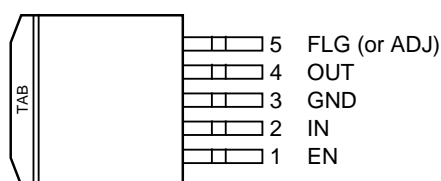

LM39301-x.x, LM39302BU
TO-263-5 (U)

Pin Description

Pin Number LM39300	Pin Number LM39301	Pin Number LM39302	Pin Name	Pin Function
	1	1	EN	Enable (Input): TTL/CMOS compatible input. Logic high=enable, logic low or open=shutdown.
1	2	2	IN	Unregulated input: +16V maximum supply.
2, TAB	3, TAB	3, TAB	GND	Ground: Ground pin and TAB are internally connected.
3	4	4	OUT	Regulator Output
	5		FLG	Error Flag (Output): Open-collector indicates an output fault condition. Active low.
		5	ADJ	Adjustable

Absolute Maximum Ratings (Note 1)

Supply Voltage (V_{IN}) -20V to +20V
 Enable Voltage (V_{EN}) +20V
 Storage Temperature (T_S) -65°C to +150°C
 Lead Temperature (soldering, 5 sec.) 260°C
 ESD, **Note 3**

Operating Ratings (Note 2)

Supply Voltage (V_{IN}) +2.5V to +16V
 Enable Voltage (V_{EN}) +16V
 Maximum Power Dissipation ($P_{D(max)}$) **Note 4**
 Junction Temperature (T_J) -40°C to +125°C
 Package Thermal Resistance
 TO-263 (θ_{JC}) 2°C/W
 TO-220 (θ_{JC}) 2°C/W

Electrical Characteristics

$T_J = 25^\circ\text{C}$, **bold** values indicate $-40^\circ\text{C} \leq T_J \leq +125^\circ\text{C}$; unless noted

Symbol	Parameter	Condition	Min	Typ	Max	Units
V_{OUT}	Output Voltage	10mA	-1		1	%
		$10\text{mA} \leq I_{\text{OUT}} \leq 3\text{A}$, $V_{\text{OUT}} + 1\text{V} \leq V_{\text{IN}} \leq 8\text{V}$	-2		2	%
	Line Regulation	$I_{\text{OUT}} = 10\text{mA}$, $V_{\text{OUT}} + 1\text{V} \leq V_{\text{IN}} \leq 8\text{V}$		0.06	0.5	%
	Load Regulation	$V_{\text{IN}} = V_{\text{OUT}} + 1\text{V}$, $10\text{mA} \leq I_{\text{OUT}} \leq 3\text{A}$		0.2	1	%
$\Delta V_{\text{OUT}}/\Delta T$	Output Voltage Temp. Coefficient, Note 5			20	100	ppm/ $^\circ\text{C}$
V_{DO}	Dropout Voltage, Note 6 & 9	$I_{\text{OUT}} = 100\text{mA}$, $\Delta V_{\text{OUT}} = -1\%$		65	200	mV
		$I_{\text{OUT}} = 750\text{mA}$, $\Delta V_{\text{OUT}} = -1\%$		185		mV
		$I_{\text{OUT}} = 1.5\text{A}$, $\Delta V_{\text{OUT}} = -1\%$		250		mV
		$I_{\text{OUT}} = 3\text{A}$, $\Delta V_{\text{OUT}} = -1\%$		385	550	mV
I_{GND}	Ground Current, Note 7	$I_{\text{OUT}} = 750\text{mA}$, $V_{\text{IN}} = V_{\text{OUT}} + 1\text{V}$		10	20	mA
		$I_{\text{OUT}} = 1.5\text{A}$, $V_{\text{IN}} = V_{\text{OUT}} + 1\text{V}$		17		mA
		$I_{\text{OUT}} = 3\text{A}$, $V_{\text{IN}} = V_{\text{OUT}} + 1\text{V}$		45		mA
$I_{\text{GND(do)}}$	Dropout Ground Pin Current	$V_{\text{IN}} \leq V_{\text{OUT(nominal)}} - 0.5\text{V}$, $I_{\text{OUT}} = 10\text{mA}$		6		mA
$I_{\text{OUT(lim)}}$	Current Limit	$V_{\text{OUT}} = 0\text{V}$, $V_{\text{IN}} = V_{\text{OUT}} + 1\text{V}$		4.5		A

Enable Input (LM39301/2)

V_{EN}	Enable Input Voltage	logic low (off)			0.8	V
		logic high (on)	2.5			V
I_{IN}	Enable Input Current	$V_{\text{EN}} = 2.5\text{V}$		15	30 75	μA μA
		$V_{\text{EN}} = 0.8\text{V}$			2 4	μA μA
$I_{\text{OUT(shdn)}}$	Shutdown Output Current	Note 8		10	20	μA

Flag Output (LM39301)

$I_{\text{FLG(leak)}}$	Output Leakage Current	$V_{\text{OH}} = 16\text{V}$		0.01	1 2	μA μA
$V_{\text{FLG(do)}}$	Output Low Voltage	$V_{\text{IN}} = 2.50\text{V}$, $I_{\text{OL}} = 250\mu\text{A}$, Note 9		220	300 400	mV mV
V_{FLG}	Low Threshold	% of V_{OUT}	93			%
	High Threshold	% of V_{OUT}			99.2	%
	Hysteresis			1		%

LM39302 Only

V_{REF}	Reference Voltage	$V_{\text{REF}} \leq V_{\text{OUT}} \leq V_{\text{IN}} - 1\text{V}$, $2.25\text{V} \leq V_{\text{IN}} \leq 16\text{V}$	1.238	1.25	1.262	V
		$10\text{mA} \leq I_{\text{I}} \leq 3\text{A}$	1.213		1.277	V
I_{ADJ}	Adjust Pin Bias Current			40	80 120	nA nA
$\Delta V_{\text{REF}}/\Delta T$	Reference Voltage Temp. Coefficient	Note 7		20		ppm/ $^\circ\text{C}$

Note 1. Exceeding the absolute maximum ratings may damage the device.

Note 2. The device is not guaranteed to function outside its operating rating.

Note 3. Devices are ESD sensitive. Handling precautions recommended.

Note 4. $P_{\text{D(max)}} = (T_{\text{J(max)}} - T_{\text{A}}) \div \theta_{\text{JA}}$, where θ_{JA} depends upon the printed circuit layout. See "Applications Information."

Note 5. Output voltage temperature coefficient is $\Delta V_{\text{OUT(worst case)}} \div (T_{\text{J(max)}} - T_{\text{J(min)}})$ where $T_{\text{J(max)}}$ is $+125^\circ\text{C}$ and $T_{\text{J(min)}}$ is -40°C .













Note 6. $V_{\text{DO}} = V_{\text{IN}} - V_{\text{OUT}}$ when V_{OUT} decreases to 99% of its nominal output voltage with $V_{\text{IN}} = V_{\text{OUT}} + 1\text{V}$. For output voltages below 2.5V, dropout voltage is the input-to-output voltage differential with the minimum input voltage being 2.5V. Minimum input operating voltage is 2.5V.








Note 7. I_{GND} is the quiescent current. $I_{\text{IN}} = I_{\text{GND}} + I_{\text{OUT}}$.

Note 8. $V_{\text{EN}} \leq 0.8\text{V}$, $V_{\text{IN}} \leq 8\text{V}$, and $V_{\text{OUT}} = 0\text{V}$


Note 9. For a 1.8V device, $V_{\text{IN}} = 2.5\text{V}$.

Typical Characteristics

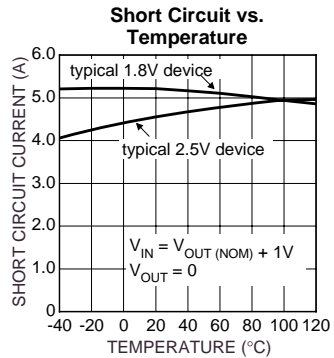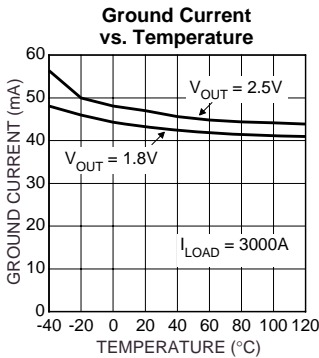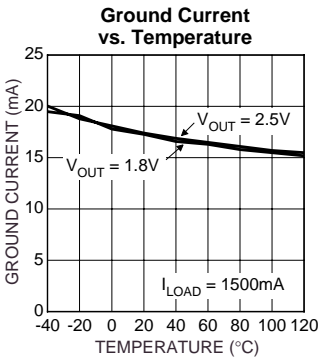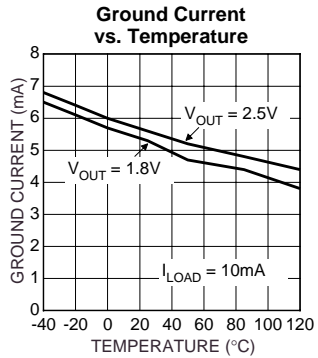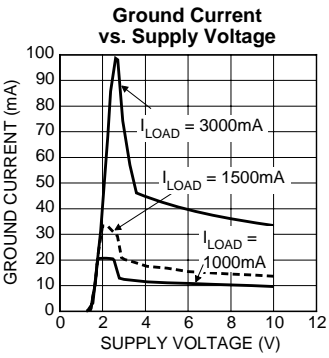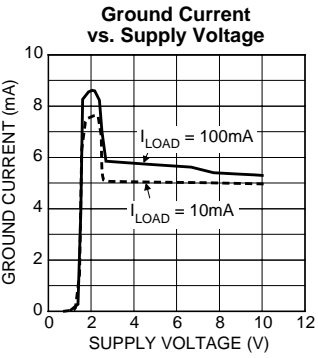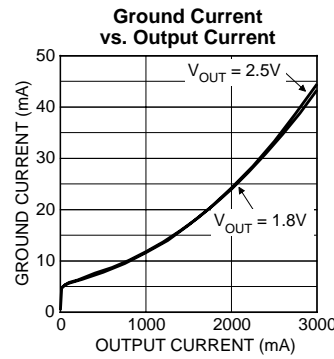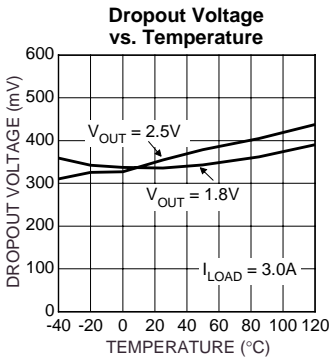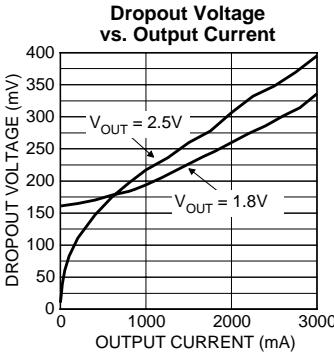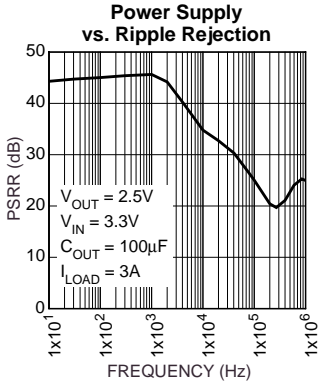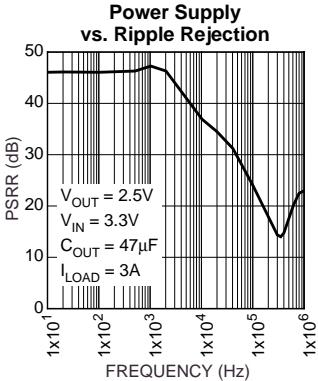


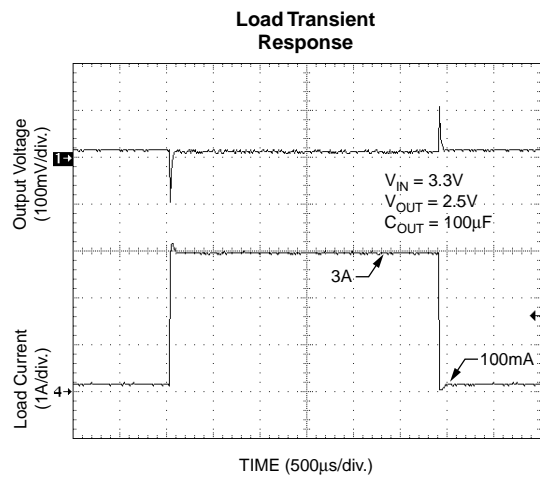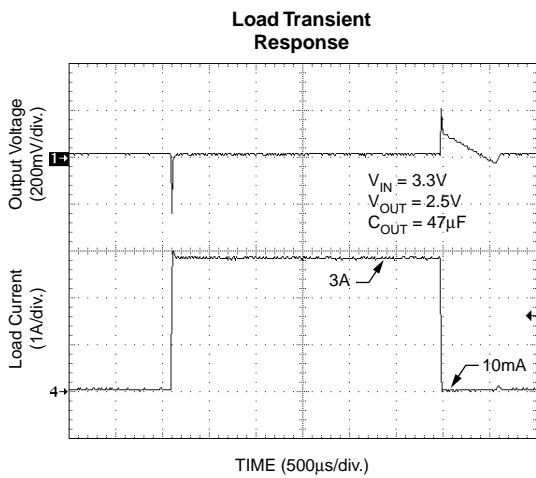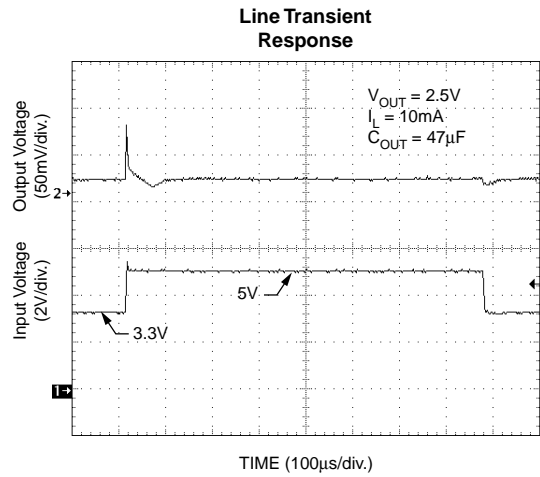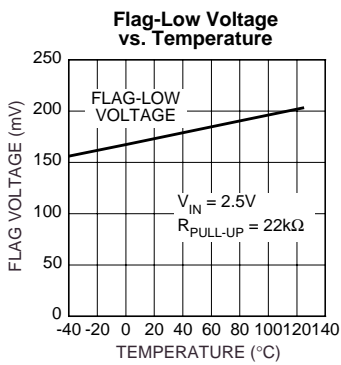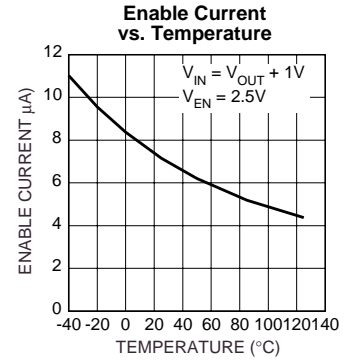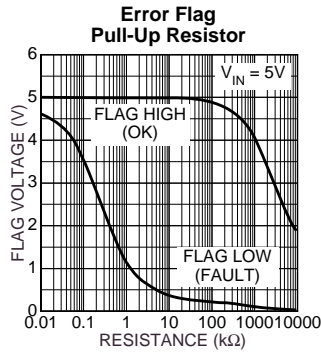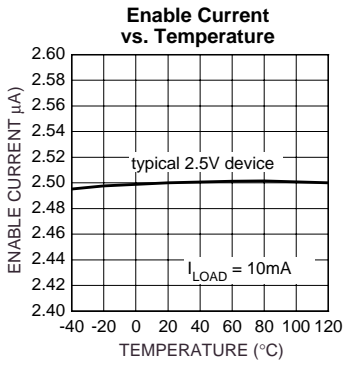


Functional Diagram

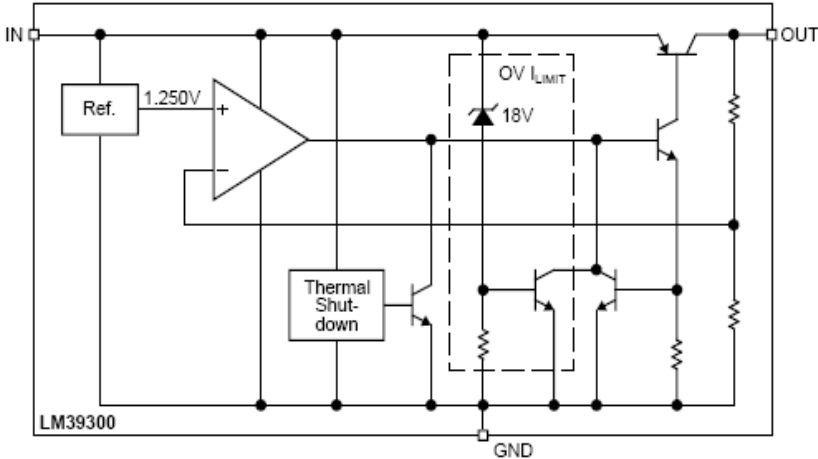

* LM39300 Fixed output (1.5V, 1.8V, 2.5V, 3.3V, 5.0V)

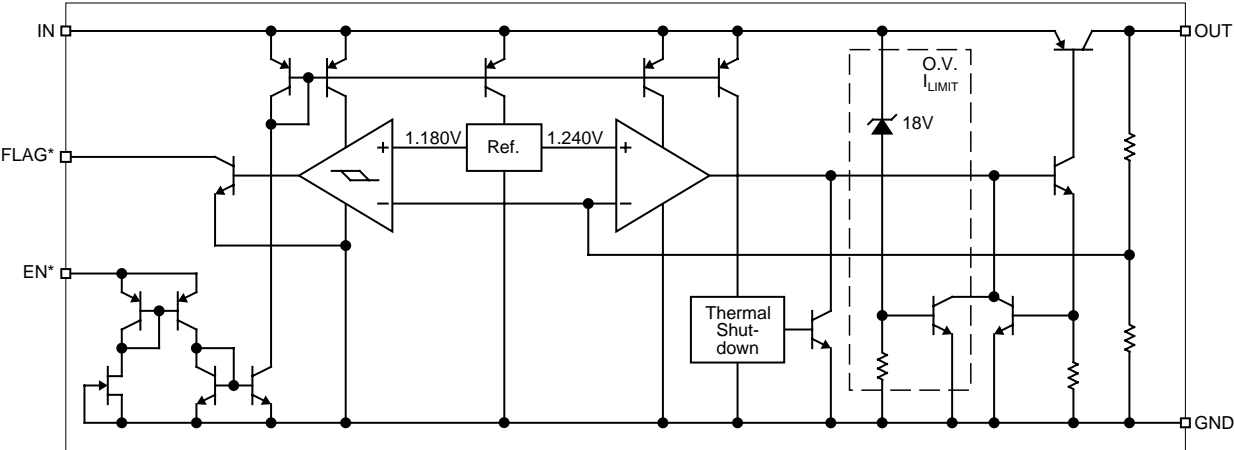

* LM39301 Fixed output (1.5V, 1.8V, 2.5V, 3.3V, 5.0V) with Flag and Enable

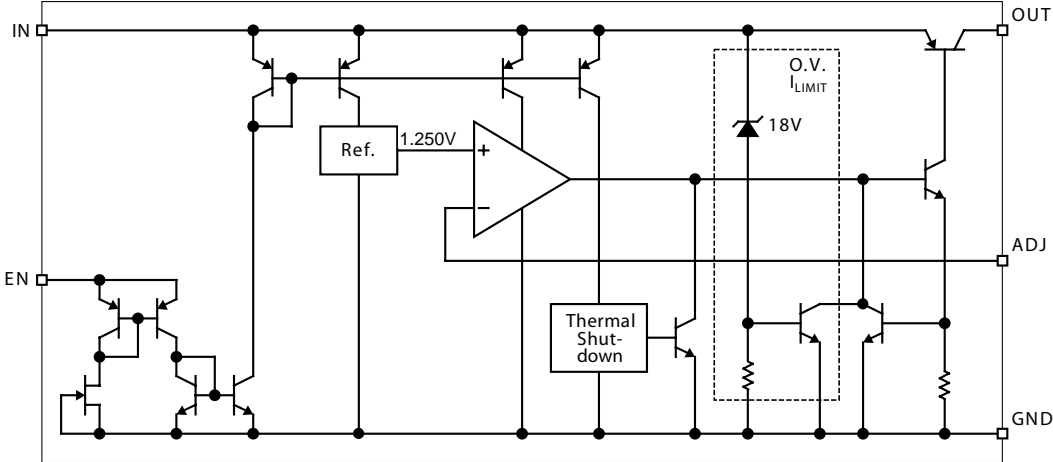

* LM39302 Adjustable Output with Enable

Applications Information

The LM39300/1/2 is a high-performance low-dropout voltage regulator suitable for moderate to high-current voltage regulator applications. Its 500mV dropout voltage at full load makes it especially valuable in battery-powered systems and as a high-efficiency noise filter in post-regulator applications. Unlike older NPN-pass transistor designs, where the minimum dropout voltage is limited by the base-to-emitter voltage drop and collector-to-emitter saturation voltage, dropout performance of the PNP output of these devices is limited only by the low V_{CE} saturation voltage.

A trade-off for the low dropout voltage is a varying base drive requirement. Super β PNP process reduces this drive requirement to only 2% to 5% of the load current.

The LM39300/1/2 regulator is fully protected from damage due to fault conditions. Current limiting is provided. This limiting is linear; output current during overload conditions is constant. Thermal shutdown disables the device when the die temperature exceeds the maximum safe operating temperature. Transient protection allows device (and load) survival even when the input voltage spikes above and below nominal. The output structure of these regulators allows voltages in excess of the desired output voltage to be applied without reverse current flow.

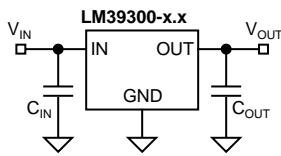


Figure 1. Capacitor Requirements

Thermal Design

Linear regulators are simple to use. The most complicated design parameters to consider are thermal characteristics. Thermal design requires four application-specific parameters:

- Maximum ambient temperature (T_A)
- Output Current (I_{OUT})
- Output Voltage (V_{OUT})
- Input Voltage (V_{IN})
- Ground Current (I_{GND})

Calculate the power dissipation of the regulator from these numbers and the device parameters from this datasheet, where the ground current is taken from the data sheet.

$$P_D = (V_{IN} - V_{OUT}) I_{OUT} + V_{IN} \cdot I_{GND}$$

The heat sink thermal resistance is determined by:

$$\theta_{SA} = \frac{T_{J(max)} - T_A}{P_D} - (\theta_{JC} + \theta_{CS})$$

where $T_{J(max)} \leq 125^\circ\text{C}$ and θ_{CS} is between 0° and 2°C/W . The heat sink may be significantly reduced in applications where the minimum input voltage is known and is large compared with the dropout voltage. Use a series input

resistor to drop excessive voltage and distribute the heat between this resistor and the regulator. The low dropout properties of Micrel Super β PNP regulators allow significant reductions in regulator power dissipation and the associated heat sink without compromising performance. When this technique is employed, a capacitor of at least $1.0\mu\text{F}$ is needed directly between the input and regulator ground.

Refer to *Application Note 9* for further details and examples on thermal design and heat sink specification.

Output Capacitor

The LM39300/1/2 requires an output capacitor to maintain stability and improve transient response. Proper capacitor selection is important to ensure proper operation. The LM39300/1/2 output capacitor selection is dependent upon the ESR (equivalent series resistance) of the output capacitor to maintain stability. When the output capacitor is $47\mu\text{F}$ or greater, the output capacitor should have less than 1Ω of ESR. This will improve transient response as well as promote stability. Ultralow ESR capacitors, such as ceramic chip capacitors may promote instability. These very low ESR levels may cause an oscillation and/or underdamped transient response. A low-ESR solid tantalum capacitor works extremely well and provides good transient response and stability over temperature. Aluminum electrolytics can also be used, as long as the ESR of the capacitor is $\leq 1\Omega$.

The value of the output capacitor can be increased without limit. Higher capacitance values help to improve transient response and ripple rejection and reduce output noise.

Input Capacitor

An input capacitor of $1\mu\text{F}$ or greater is recommended when the device is more than 4 inches away from the bulk ac supply capacitance, or when the supply is a battery. Small, surface-mount, ceramic chip capacitors can be used for the bypassing. Larger values will help to improve ripple rejection by bypassing the input to the regulator, further improving the integrity of the output voltage.

Transient Response and 3.3V to 2.5V and 2.5V to 1.8V Conversions

The LM39300/1/2 has excellent transient response to variations in input voltage and load current. The device has been designed to respond quickly to load current variations and input voltage variations. Large output capacitors are not required to obtain this performance. A standard $47\mu\text{F}$ output capacitor, preferably tantalum, is all that is required. Larger values help to improve performance even further.

By virtue of its low-dropout voltage, this device does not saturate into dropout as readily as similar NPN-based designs. When converting from 3.3V to 2.5V or 2.5V to 1.8V, the NPN-based regulators are already operating in dropout, with typical dropout requirements of 1.2V or greater. To convert down to 2.5V without operating in dropout, NPN-based regulators require an input voltage of 3.7V at the very least. The LM39300/1/2 regulator will provide excellent performance with an input as low as 3.0V or 2.5V. This gives the PNP-based regulators a distinct advantage over older, NPN-based linear regulators.

Minimum Load Current

The LM39300/1/2 regulator is specified between finite loads. If the output current is too small, leakage currents dominate and the output voltage rises. A 10mA minimum load current is necessary for proper regulation.

Error Flag

The LM39301 version features an error flag circuit which monitors the output voltage and signals an error condition when the voltage drops 5% below the nominal output voltage. The error flag is an open-collector output that can sink 10mA during a fault condition.

Low output voltage can be caused by a number of problems, including an overcurrent fault (device in current limit) or low input voltage. The flag is inoperative during overtemperature shutdown.

When the error flag is not used, it is best to leave it open. The flag pin can be tied directly to pin 4, the output pin.

Enable Input

The LM39301/2 version features an enable input for on/off control of the device. Its shutdown state draws "zero" current (only microamperes of leakage). The enable input is TTL/CMOS compatible for simple logic interface, but can be connected to up to 20V. When enabled, it draws approximately 15 μ A.


LM39302 Adjustable Regulator Design

The LM39302 allows programming output any voltage, but between 1.25V and 16V maximum operating rating voltage of the family. Two resistors are used. Resistors can be quite large, up to 1M ohms, because of the very high input impedance and low bias current of the sense comparator: the resistor values are calculated by:


$$R1=R2(V_{out}/1.250-1)$$

Where V_{out} is the desired output voltage. Page 1 typical application shows component definition. Application with widely varying load currents may scale the resistors to draw the minimum load current required for proper operation.


Package Information

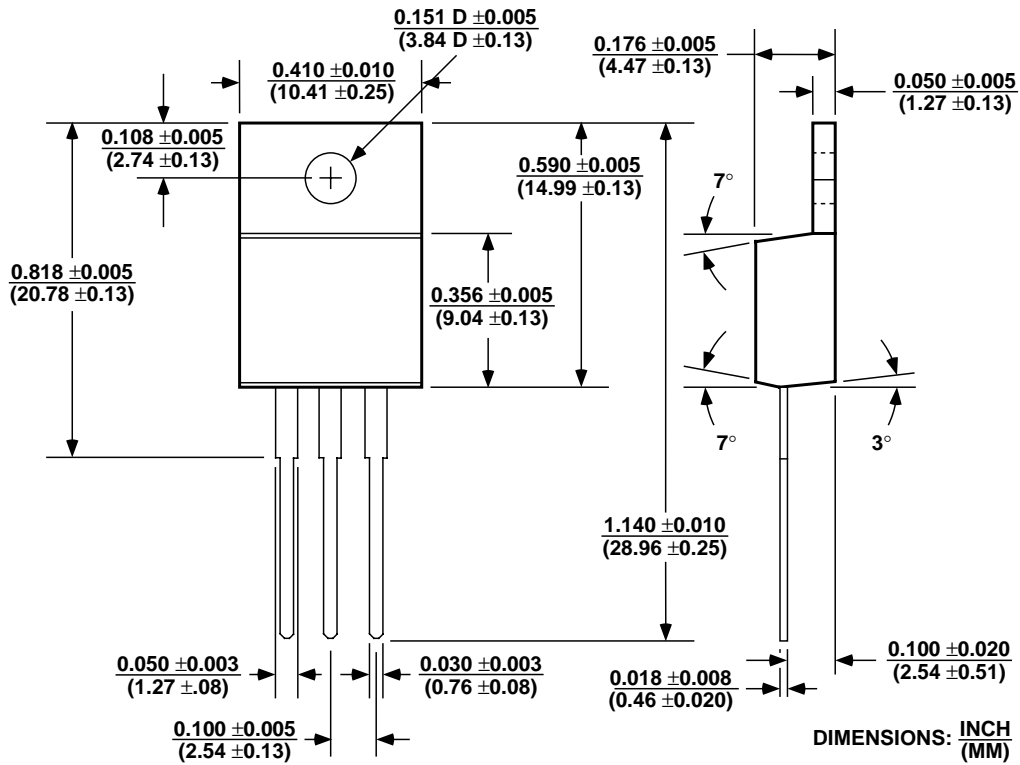


3-Lead TO-220 (T)

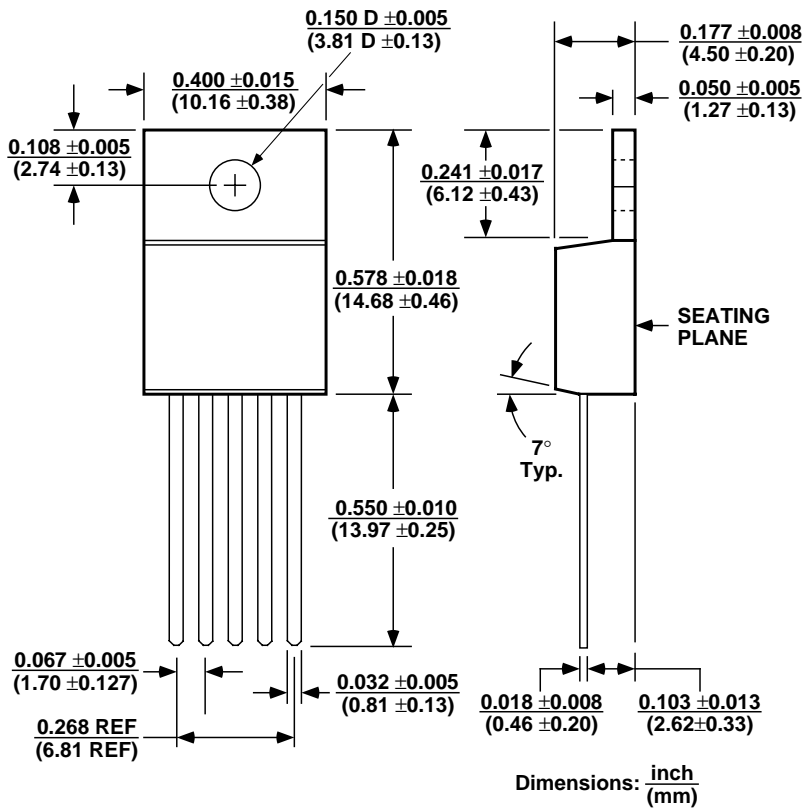

5-Lead TO-220-5 (T)

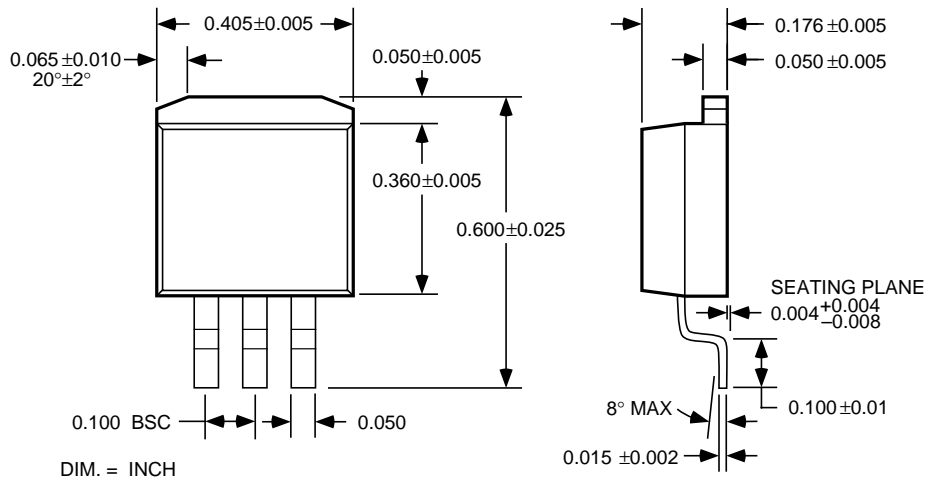

3-Lead TO-263 (S)

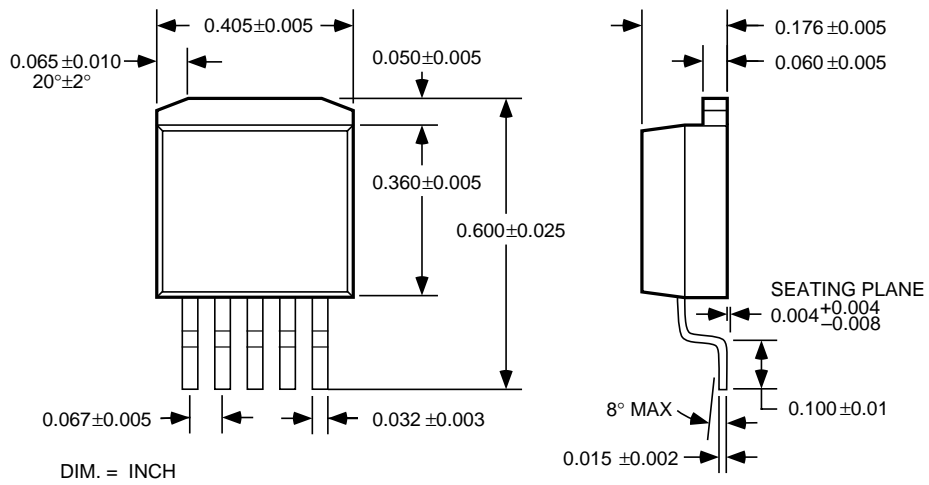

5-Lead TO-263-5 (S)