



0.3mm Pitch ZIF Right Angle SMT FFC/FPC Connector



0.3A-WTX-nP

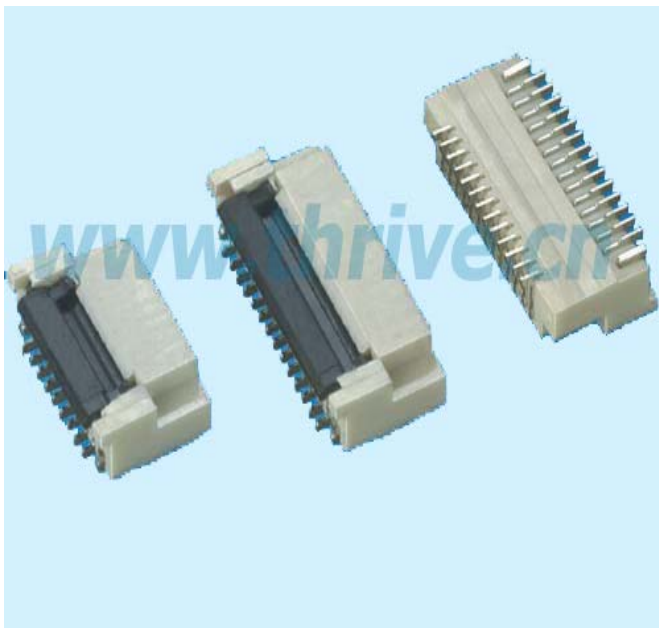

0.3A-WTX-nP



	27P	17P
A	10.65	7.65
B	9.20	6.20
C	7.80	4.80
D	7.20	4.20

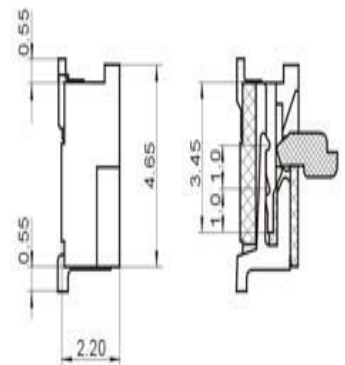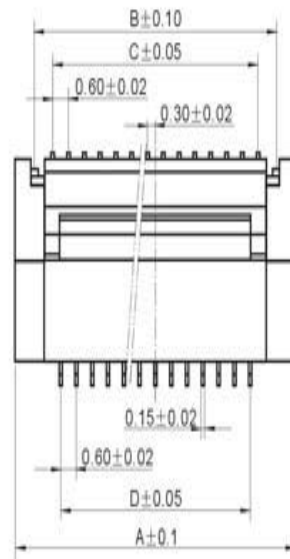

0.3A-WTX-nP

- 间距 (Pitch)
- 型号:(Model)
- 卧式:W
- Horizontal pype:W
- 贴式:T
- SMT:T
- 下接点:X(上接点:S)
- Bottom of contact:X(Top of contact: S)
- 线数 (Hole location)

Contact parts


*Material: Phosphor bronze

Body:

*Material: Nylon 46, UL94V-0

Packing

- * Brede
- * Tube
- * Bag

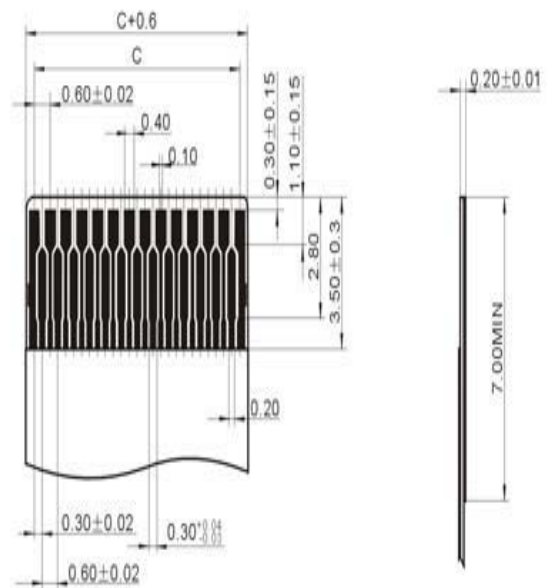

适用FFC寸法
Applicable FFC

Technology parameter

- * Pin: 6 ~ 50
- * Rated Voltage: AC、DC、200V (50HZ)
- * Rating current: > 0.4A 、 AC、 DC
- * Dielectric Withstanding Voltage :500V AC/m
- * Operating Temperature: -25℃ ~+ 85℃
- *Insulation Resistance: $\geq 500M\Omega$
- * Contact Resistance : $\leq 0.02\Omega$
- * Single side Contact

Hole drawing

- * $n > 6$
- * $A = 2.25 + (n+1) \times 0.3$
- * $B = 0.8 + (n+1) \times 0.3$
- * $C = (n-1) \times 0.3$
- * $D = (n-3) \times 0.3$