



# 2.54mm Pitch LIF Vertical/Right Angle DIP FFC/FPC Connector




2.54A-nPW



## ● 2.54-A-nP

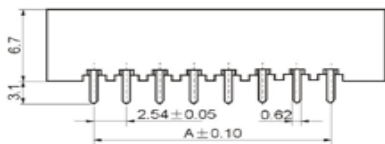

## ● 2.54-A-nPW



## ● 技術參數 SPECIFICATIONS

- 極數 Poles: 3~21
- 額定電壓 Voltage rating(max): 200V DC/AC(rms)
- 額定電流 Current rating 1A
- 工作溫度 Working Temperature: -20°C~+85°C
- 耐壓值 Withstand voltage: 500VAC(rms)
- 絕緣電阻 Insulation resistance:  $\geq 500M \Omega$
- 接觸電阻 Contact resistance:  $\leq 0.03 \Omega$
- 雙面接觸 Dual Contact

## ● 材料 MATERIAL

- 接觸件 Contact: 磷青銅 鍍錫 Phosphor Bronze Tin-plated
- 塑膠本體 Housing: 熱塑性塑料 Thermoplastic UL94V-0

## ● 包裝方式 PACKAGE

袋裝 Bag Package

孔位 Poles	A	B	C
3	5.08	11.06	12.86
4	7.62	13.60	15.40
5	10.16	16.14	17.94
6	12.70	18.68	20.48
7	15.24	21.22	23.02
8	17.78	23.76	25.56
9	20.32	26.30	28.10
10	22.86	28.84	30.64
11	25.40	31.38	33.18
12	27.94	33.92	35.72
13	30.48	36.46	38.26
14	33.02	39.00	40.80
15	35.56	41.54	43.34
16	38.10	44.08	45.88
17	40.64	46.62	48.42
18	43.18	49.16	50.96
19	45.72	51.70	53.50
20	48.26	54.25	56.04
21	50.80	56.78	58.58