

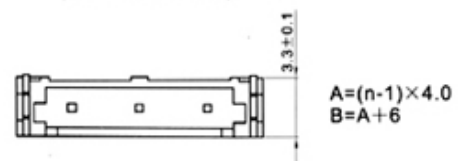
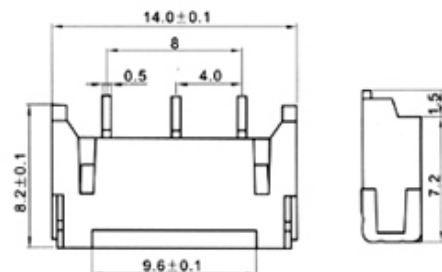
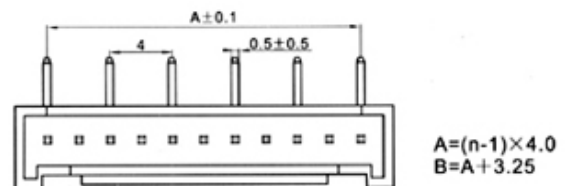
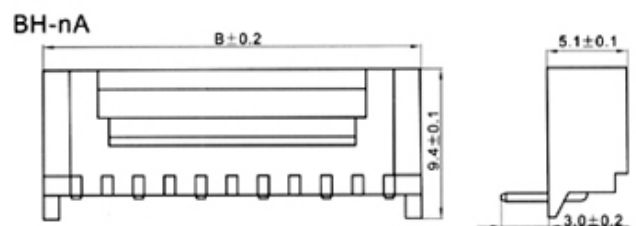


# BH Connector

BH-nY

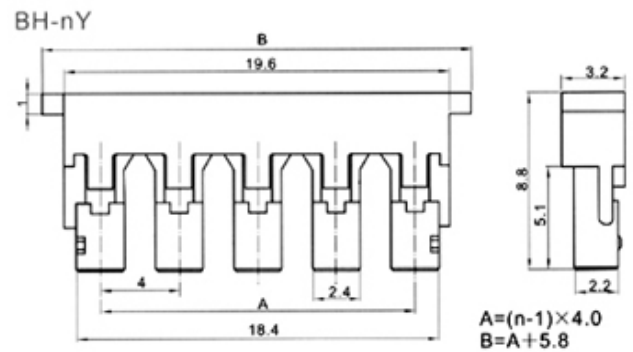

## Contact parts

\*Material: Phosphor bronze

## Body:

\*Material: Nylon 46, UL94V-0

## Packing

- \* Brede
- \* Tube
- \* Bag

## Technology parameter

- \* Pin: 4 ~ 50
- \* Rated Voltage: AC、DC、200V (50HZ)
- \* Rating current: > 0.4A 、 AC、 DC
- \* Dielectric Withstanding Voltage : 500V AC/m
- \* Operating Temperature: -25℃ ~ + 85℃
- \* Insulation Resistance:  $\geq 500M\Omega$
- \* Contact Resistance :  $\leq 0.02\Omega$
- \* Single side Contact