

PRODUCT SPECIFICATION

*Sunbright SMD3528 Non-waterproof flexible strip **SMD3528** (White Color)




ATTENTION
OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
DISCHARGE
SENSITIVE
DEVICES

*Character

- 500mmx 8mm printed circuit board
- LED Qty:30 PCS LED
- Input :DC12V /200mA
- The dimension can be custom-made
- Package: 10PCS / Reel (5m / Reel)

*Circuit & Dimension

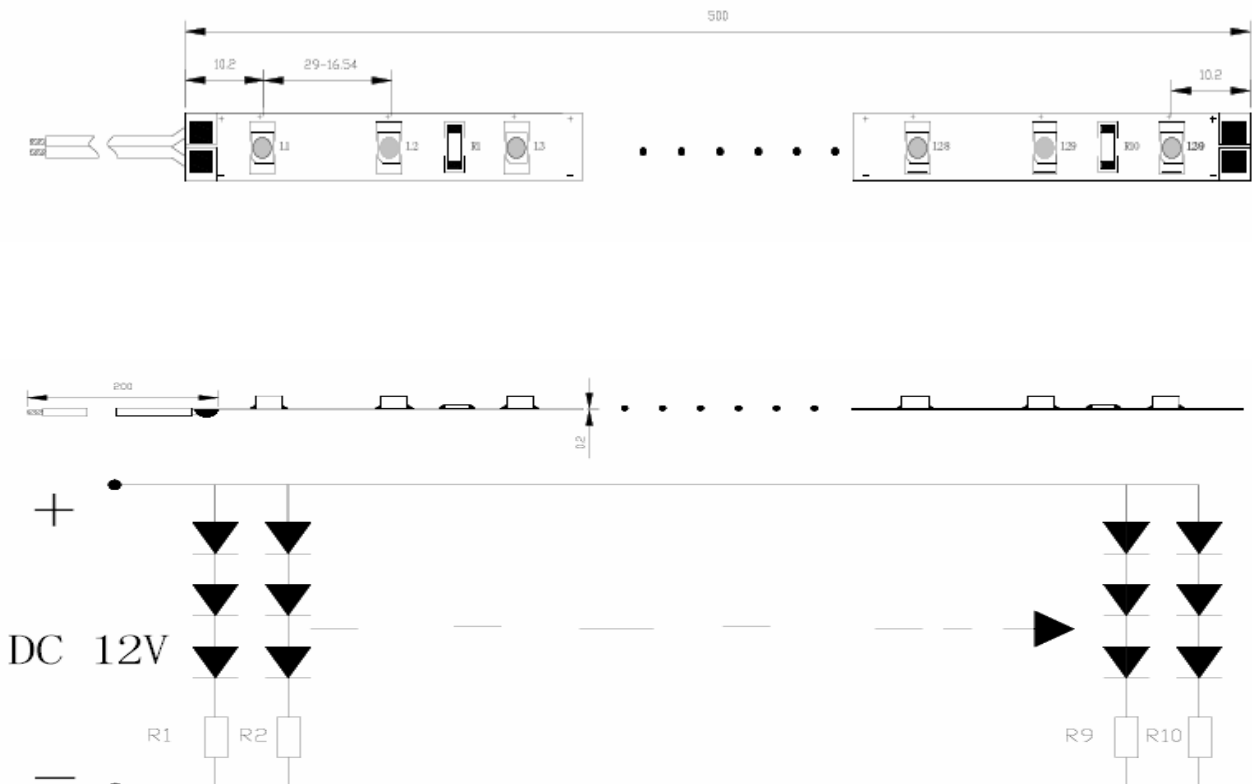

PRODUCT SPECIFICATION

*Electrical / Optical Characteristics at TA=25°C

Parameter	Symbol	Color	Condition	Min	Typ	Max
Forward Voltage DC	VF	white	IF 200 mA	---	12V	---
Dominant Wavelength	TC	white	IF 200 mA	3500K	5000K	12000K
Power	P	white	IF 200 mA	---	2.4W	---
Luminous Flux	LM	white	IF 200 mA	120	140	160

Notes: Tolerance of measurement of luminous intensity±15

*Operating Environment


Item	Range	Unit
Forward Current	IF200	m A
Operating Voltage	85~265	VAC
Electrostatic Discharge	>1500	V
Operating Temperature	-25 ~ +60	℃
Storage Temperature	-40 ~ +80	℃

PRODUCT SPECIFICATION

*Applications:

- 1). Architectural decorative lighting
- 2). Indoor Decoration
- 3). Auditorium walkway lighting
- 4). Stairway lighting & Decoration
- 5). Border/contour lighting
- 6). Channel letter lighting
- 7). Emergency & Security lighting
- 8). Cove lighting
- 9). Shop-window decoration.

*Package :

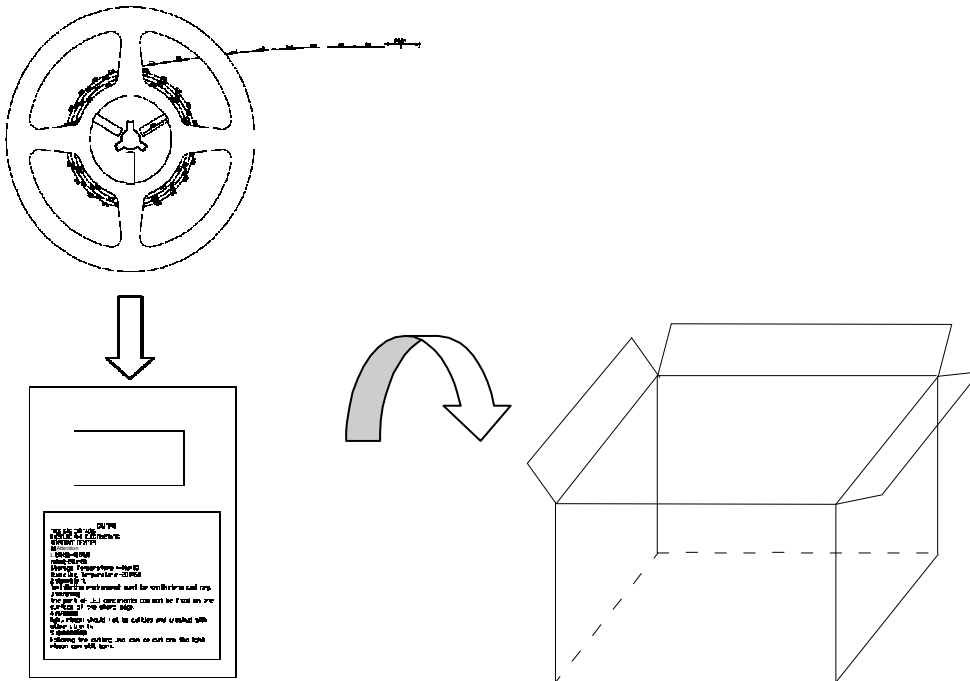

Remark:

1. Carton Size : 26 *24 *20 CM (L*W*H)
2. Carton Qty : 10pcs /reel, 15 reel / carton
3. Net weight :1.6 Kg / Carton
4. Gross Weight :2.0Kg / Carton
5. The packing specification can be customs-made according to customer's requirement