






LED UNDERWATER LIGHT

OUTDOOR LED LIGHTING


Characteristics:

- Using Edison led, energy saving, environmental protection , long service time, no UV radiation etc.
- Waterproof up to IP68, using stainless steel cover and components, thick tempered glass, anti-corrosion, strong and durable.
- Patented packaging technology and heat dissipation design ensure the heat disperses quickly.
- DMX512 protocol control ,external control ,internal control.
- Application: Squares and civilization plazas decoration, valley, restaurant, hotel, building facade lighting.



Model	Led quantity	Input power	Input voltage	Beam angle	Color	Waterproof grade	Dimension(mm)	Net weight (KG)
3x3W LED underwater light	3pcs	9W	DC24V	25°/30°/45°/60°	F(one chip RGB color)	IP65	φ 92*155(H)	0.6
6X1W LED underwater light	6pcs	6W	DC24V	25°/30°/45°/60°	R/Y/B/G/W/E/F	IP65	φ 155*165(H)	2.8
9X1W LED underwater light	9pcs	9W	DC24V	25°/30°/45°/60°	R/Y/B/G/W/E/F	IP65	φ 162*200(H)	2.8
12X1W LED underwater light	12pcs	12W	DC24V	25°/30°/45°/60°	R/Y/B/G/W/E/F	IP65	φ 155*165(H)	2.8

R-red, Y-yellow, B-blue, G-green, W-cool white, E-warm white, F-RGB color






LED TILE LIGHT

OUTDOOR LED LIGHTING

Characteristics:

- Two kinds of shell materials: base shell of stainless steel, toughened glass on the surface.
- Led board is glued for waterproof, with twice waterproof process(IP65~ IP68).
- Adopt special technology of surface treatment, Excellent transperence, homogeneous surface luminescence
- Working Temperature: -20°C ~ +65°C .
- Custom-made sizes are welcomed.
- Application: Pedestrian Mall, Square, Plaza, Club, Hotel, Garden, Beach, fountain (indoor and outdoor are available).
- Installation: Install with concrete directly or recessed box.

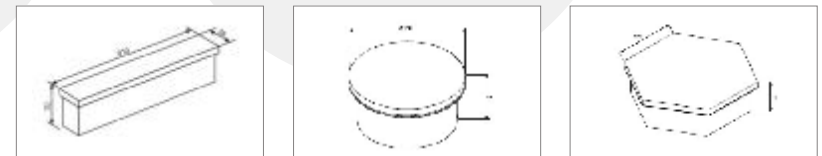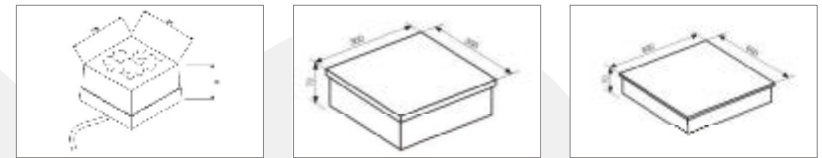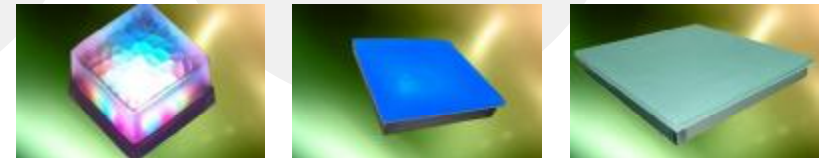

Model	Led quantity	Input power	Input voltage	Beam angle	Color	Waterproof grade	Dimension(mm)	Net weight (KG)
100*100 led tile light	18pcs	1.3W	DC24V	120°	R/Y/B/G/W/E/F	IP65~ IP68	100*100*60	0.8
300*300 led tile light	234pcs	16.8W	DC24V	120°	R/Y/B/G/W/E/F	IP65~ IP68	300*300*70	5.2
600*600 led tile light	1080pcs	67.0W	DC24V	120°	R/Y/B/G/W/E/F	IP65~ IP68	600*600*70	24.2
910*28 led tile light	96pcs	6.4W	DC24V	120°	R/Y/B/G/W/E/F	IP65~ IP68	910*28*70	2.4
150*70 led tile light	54pcs	3.9W	DC24V	120°	R/Y/B/G/W/E/F	IP65~ IP68	φ 150*70	4.2
6*125 led tile light	90pcs	7.0W	DC24V	120°	R/Y/B/G/W/E/F	IP65~ IP68	(6*125)*70	2.6

R-red, Y-yellow, B-blue, G-green, W-cool white, E-warm white, F-RGB color