


CLASS 150 FLANGES

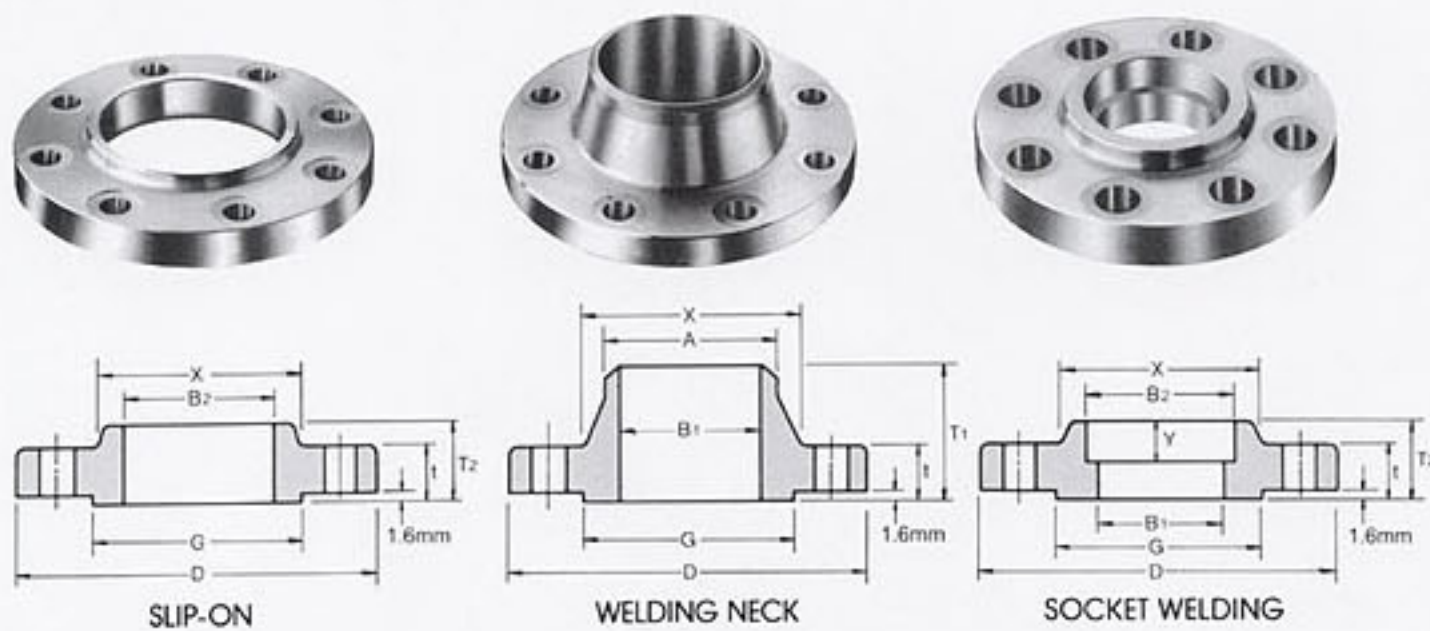


ANSI B16.5 FORGED FLANGES

Unit : mm

Nominal Pipe Size	Outside Diam.	O. D. of Raised Face	Diam. of Base of Hub	Thickness	BORE			LENGTH THRU HUB			Diam. of Hub of Bevel	Radius of Fillet	Thread Length
					Welding Neck Socket Welding	Slip-on Socket Welding	Lap Joint	Welding Neck	Slip-on Threaded Socket Welding	Lap Joint			
					B ₁	B ₂	B ₃	T ₁	T ₂	T ₃			
D	G	X	t	B ₁	B ₂	B ₃	T ₁	T ₂	T ₃	A	R	Q	
1/2	89	35.1	30.2	11.2	15.7	22.4	22.9	47.8	15.7	15.7	21.3	3.0	15.7
3/4	99	42.9	38.1	12.7	20.8	27.7	28.2	52.3	15.7	15.7	26.7	3.0	15.7
1	108	50.8	49.3	14.2	26.7	34.5	35.1	55.6	17.5	17.5	33.5	3.0	17.5
1 1/4	117	63.5	58.7	15.7	35.1	43.2	43.7	57.2	20.6	20.6	42.2	4.8	20.6
1 1/2	127	73.2	65.0	17.5	40.9	49.5	50.0	62.0	22.4	22.4	48.3	6.4	22.4
2	152	91.9	77.7	19.1	52.6	62.0	62.5	63.5	25.4	25.4	60.5	7.9	25.4
2 1/2	178	104.6	90.4	22.4	62.7	74.7	75.4	69.9	28.4	28.4	73.2	7.9	28.4
3	191	127.0	108.0	23.9	78.0	90.7	91.4	69.9	30.2	30.2	88.9	9.7	30.2
3 1/2	216	139.7	122.2	23.9	90.2	103.4	104.1	71.4	31.8	31.8	101.6	9.7	31.8
4	229	157.2	134.9	23.9	102.4	116.1	116.8	76.2	33.3	33.3	114.3	11.2	33.3
5	254	185.7	163.6	23.9	128.3	143.8	144.5	88.9	36.6	36.6	141.2	11.2	36.6
6	279	215.9	192.0	25.4	154.2	170.7	171.5	88.9	39.6	39.6	168.4	12.7	39.6
8	343	269.7	246.1	28.4	202.7	221.5	222.3	101.6	44.5	44.5	219.2	12.7	44.5
10	406	323.9	304.8	30.2	254.5	276.4	277.4	101.6	49.3	49.3	273.1	12.7	49.3
12	483	381.0	365.3	31.8	304.8	327.2	328.2	114.3	55.6	55.6	323.9	12.7	55.6
14	533	412.8	400.1	35.1	336.6	359.2	360.2	127.0	57.2	79.2	355.6	12.7	57.2
16	597	469.9	457.2	36.6	387.4	410.5	411.2	127.0	63.5	87.4	406.4	12.7	63.5
18	635	533.4	505.0	39.6	438.2	461.8	462.3	139.7	68.3	96.8	457.2	12.7	68.3
20	699	584.2	558.8	42.9	489.0	513.1	514.4	144.5	73.2	103.1	508.0	12.7	73.2
24	813	692.2	663.4	47.8	590.6	616.0	616.0	152.4	82.6	111.3	609.6	12.7	82.6

Notes:

- (1) For the 'Bore' (B₁) other than Standard Wall Thickness, refer to page 54 .
- (2) Class 150 flanges except Lap Joint will be furnished with 0.06" (1.6mm) raised face, which is included in 'Thickness' (t) and 'Length through Hub' (T₁), (T₂).
- (3) For Slip-on, Threaded, Socket Welding and Lap Joint Flanges, the hubs can be shaped either vertical from base to top or tapered within the limits of 7 degrees.

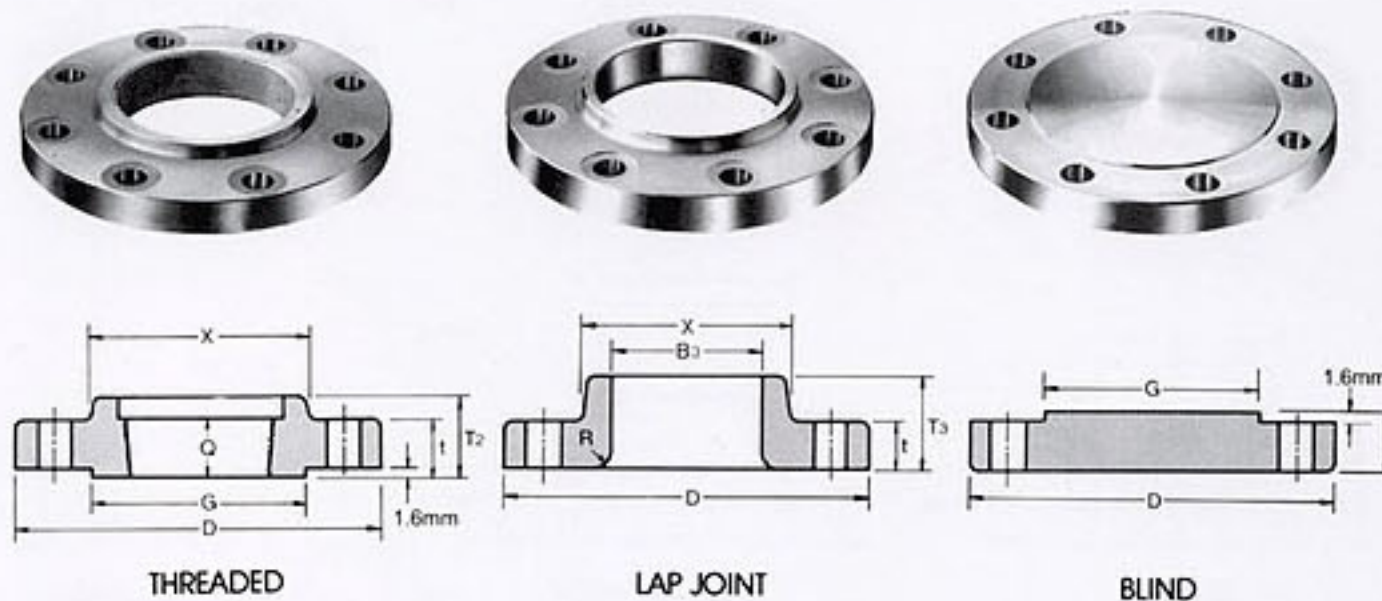


Unit: mm

Nominal Pipe Size	Depth of Socket	DRILLING			BOLTING				APPROXIMATE WEIGHT									
		Bolt Circle Diam	Number of Holes	Diam of Holes	Diam of Bolts (inch)	Machine Bolt Length		Stud Bolt Length	Welding Neck		Slip-on and Threaded		Lap Joint		Blind		Socket Welding	
						Raised Face	Raised Face		Ring Joint	Kg	lb	Kg	lb	Kg	lb	Kg	lb	Kg
Y																		
1/2	9.7	60.5	4	15.7	1/2	50.8	57.2	—	0.51	1.10	0.47	1.00	0.51	1.00	0.47	1.00	0.47	1.00
3/4	11.2	69.9	4	15.7	1/2	50.8	63.5	—	0.73	1.60	0.58	1.30	0.64	1.40	0.63	1.40	0.59	1.30
1	12.7	79.2	4	15.7	1/2	57.2	63.5	76.2	1.07	2.40	0.85	1.90	0.93	1.80	0.94	2.10	0.87	1.90
1 1/4	14.2	88.9	4	15.7	1/2	57.2	69.9	82.6	1.40	3.10	1.08	2.40	1.16	2.00	1.23	2.70	1.11	2.40
1 1/2	15.7	98.6	4	15.7	1/2	63.5	69.9	82.6	1.81	4.00	1.41	3.10	1.51	3.30	1.62	3.60	1.45	3.20
2	17.5	120.7	4	19.1	3/4	69.9	82.6	95.3	2.59	5.70	2.26	5.00	2.38	5.20	2.64	5.80	2.33	5.00
2 1/2	19.1	139.7	4	19.1	3/4	76.2	88.9	101.6	4.28	9.40	3.43	7.60	3.60	7.90	4.06	9.00	3.55	7.80
3	20.6	152.4	4	19.1	3/4	76.2	88.9	101.6	5.18	11.40	3.87	8.50	4.04	8.90	4.90	10.80	4.02	8.90
3 1/2	22.4	177.8	8	19.1	3/4	76.2	88.9	101.6	5.45	12.00	4.99	11.00	4.99	11.00	5.90	13.00	4.99	11.00
4	23.9	190.5	8	19.1	3/4	76.2	88.9	101.6	7.32	16.10	5.75	12.70	5.96	13.00	7.41	16.30	5.99	13.20
5	23.9	215.9	8	22.4	3/4	82.6	95.3	108.0	8.91	19.60	6.22	13.70	6.44	14.00	8.76	19.30	6.68	14.70
6	26.9	241.3	8	22.4	3/4	82.6	101.6	114.3	11.26	24.80	7.38	16.30	7.59	16.70	11.31	24.90	7.99	17.60
8	31.8	298.5	8	22.4	3/4	88.9	108.0	120.7	17.68	39.00	12.36	27.30	12.66	27.90	19.92	43.90	13.29	29.30
10	33.3	362.0	12	25.4	3/4	101.6	114.3	127.0	24.79	54.70	17.10	37.70	16.78	37.00	29.39	64.80	19.50	43.00
12	39.6	431.8	12	25.4	3/4	101.6	120.7	133.4	38.98	85.90	27.68	61.00	28.30	62.40	43.70	95.30	29.03	64.00
14	41.4	476.3	12	28.4	1	114.3	133.4	146.1	51.71	114.00	35.20	77.60	41.50	91.50	59.42	140.00	38.56	85.00
16	44.5	539.8	16	28.4	1	114.3	133.4	146.1	64.41	142.00	42.18	93.00	52.98	116.80	77.11	170.00	44.49	98.00
18	49.3	577.9	16	31.8	1 1/4	127.0	146.1	158.8	74.84	165.00	49.71	109.60	59.00	130.00	94.80	209.00	54.43	120.00
20	54.1	635.0	20	31.8	1 1/4	139.7	158.8	171.5	89.36	197.00	65.50	140.00	72.12	159.00	123.38	272.00	70.31	155.00
24	63.5	749.3	20	35.1	1 1/4	152.4	171.5	184.2	119.66	263.80	90.50	199.50	99.02	218.30	188.24	415.00	95.25	210.00

- (4) Blind Flanges may be made with the same hub as that used for Slip-on Flanges or without hub.
- (5) The end surface and bevels (bearing surface for bolting) are made parallel within 4 degrees. To accomplish this condition

CLASS 300 FLANGES

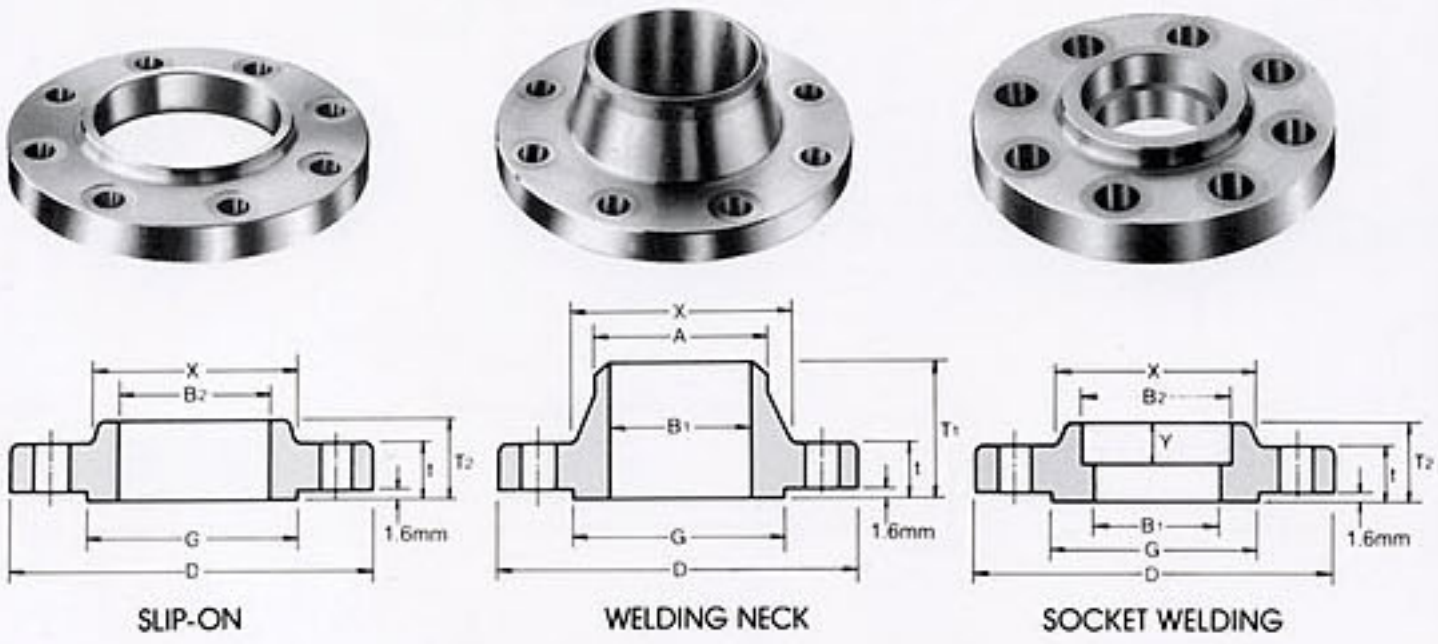


ANSI B16.5 FORGED FLANGES

Unit:mm

Nominal Pipe Size	Outside Diam	Diam. at Base of Hub	O. D. of Raised Face	Thickness	BORE				LENGTH THRU HUB			Diam. of Hub of Bevel	Radius of Fillet	Thread Length
					Welding Neck Socket Welding	Slip-on Socket Welding	Lap Joint	Counter Bore Min. Threaded Min.	Welding Neck	Slip-on Threaded Socket Welding	Lap Joint			
					B ₁	B ₂	B ₃	B	T ₁	T ₂	T ₃			
D	X	G	t	B ₁	B ₂	B ₃	B	T ₁	T ₂	T ₃	A	R	Q	
1/2	95	38.1	35.1	14.2	15.7	22.4	22.9	23.6	52.3	22.4	22.4	21.3	3.0	15.7
3/4	117	47.8	42.9	15.7	20.8	27.7	28.2	29.0	57.2	25.4	25.4	26.7	3.0	15.7
1	124	53.8	50.8	17.5	26.7	34.5	35.1	35.8	62.0	26.9	26.9	33.5	3.0	17.5
1 1/4	133	63.5	63.5	19.1	35.1	43.2	43.7	44.5	65.0	26.9	26.9	42.2	4.8	20.6
1 1/2	155	69.9	73.2	20.6	40.9	49.5	50.0	50.5	68.3	30.2	30.2	48.3	6.4	22.4
2	165	84.1	91.9	22.4	52.6	62.0	62.5	63.5	69.9	33.3	33.3	60.5	7.9	28.4
2 1/2	191	100.1	104.6	25.4	62.7	74.7	75.4	76.2	76.2	38.1	38.1	73.2	7.9	31.8
3	210	117.3	127.0	28.4	78.0	90.7	91.4	92.2	79.2	42.9	42.9	88.9	9.7	31.8
3 1/2	229	133.4	139.7	30.2	90.2	103.4	104.1	104.9	81.0	44.5	44.5	101.6	9.7	36.6
4	254	146.1	157.2	31.8	102.4	116.1	116.8	117.6	85.9	47.8	47.8	114.3	11.2	36.6
5	279	177.8	185.7	35.1	128.3	143.8	144.5	144.5	98.6	50.8	50.8	141.2	11.2	42.9
6	318	206.2	215.9	36.6	154.2	170.7	171.5	171.5	98.6	52.3	52.3	168.4	12.7	46.0
8	381	260.4	269.7	41.1	202.7	221.5	222.3	222.3	111.3	62.0	62.0	219.2	12.7	50.8
10	445	320.5	323.9	47.8	254.5	276.4	277.4	276.4	117.3	66.5	95.3	273.1	12.7	55.6
12	521	374.7	381.0	50.8	304.8	327.2	328.2	328.7	130.0	73.2	101.6	323.9	12.7	60.5
14	584	425.5	412.8	53.8	336.6	359.2	360.2	360.4	142.7	76.2	111.3	355.6	12.7	63.5
16	648	482.6	469.9	57.2	387.4	410.5	411.2	411.2	146.1	82.6	120.7	406.4	12.7	68.3
18	711	533.4	533.4	60.5	438.2	461.8	462.3	462.0	158.8	88.9	130.0	457.2	12.7	69.9
20	775	587.2	584.2	63.5	489.0	513.1	514.4	512.8	162.1	95.3	139.7	508.0	12.7	73.2
24	914	701.5	692.2	69.9	590.6	616.0	616.0	614.4	168.1	106.4	152.4	609.6	12.7	82.6

Notes:

- (1) For the 'Bore' (B₁) other than Standard Wall Thickness, refer to page 54.
- (2) Class 300 flanges except Lap Joint will be furnished with 0.06" (1.6mm) raised face, which is included in 'Thickness' (t) and 'Length through Hub' (T₁), (T₂).
- (3) For Slip-on, Threaded, Socket Welding and Lap Joint Flanges, the hubs can be shaped either vertical from base to or tapered within the limits of 7 degrees.

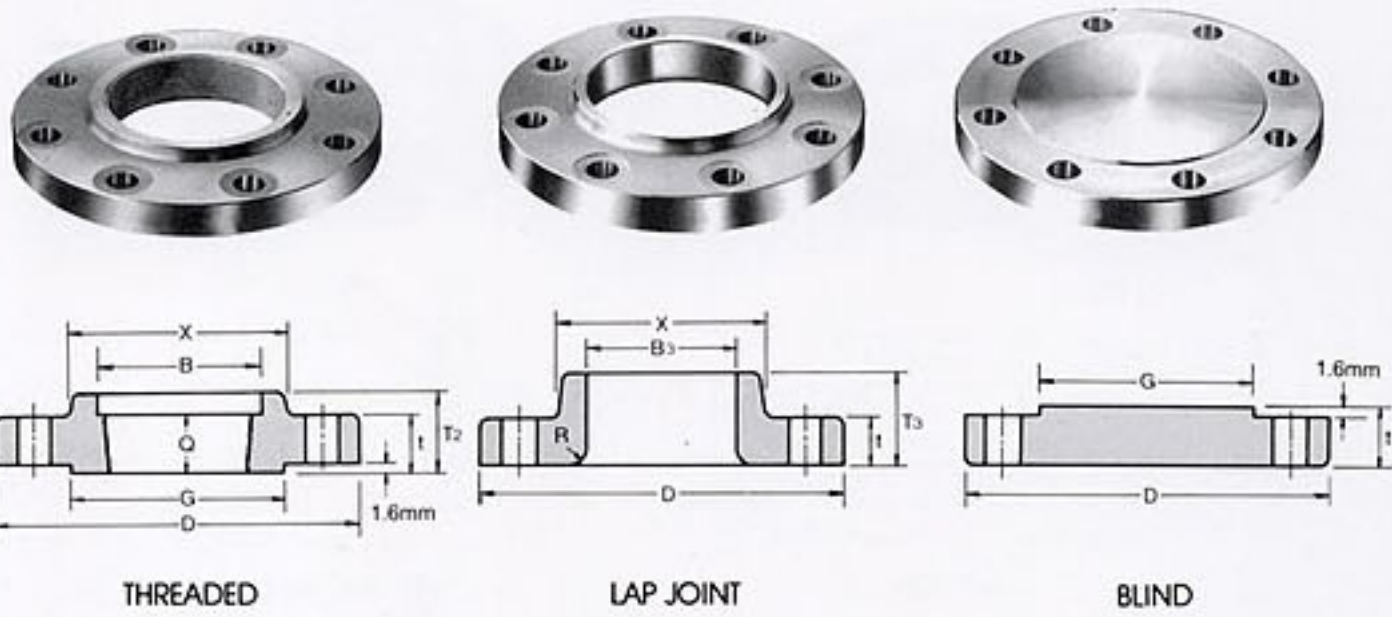


Unit:mm

Nominal Pipe Size	Depth of Socket	DRILLING			BOLTING			APPROXIMATE WEIGHT										
		Bolt Circle Diam	Number of Holes	Diam of Holes	Diam of Bolts (Inch)	Machine Bolt Length	Stud Bolt Length	Welding Neck		Slip-on and Threaded		Lap Joint		Blind		Socket Welding		
								Raised Face	Ring Joint	Kg	lb	Kg	lb	Kg	lb	Kg	lb	Kg
Y																		
1/2	9.7	66.5	4	15.7	1/2	57.2	63.5	76.2	0.78	1.70	0.62	1.40	0.61	1.30	0.62	1.40	0.62	1.40
3/4	11.2	82.6	4	19.1	5/8	63.5	76.2	88.9	1.34	3.00	1.15	2.50	1.15	2.50	1.16	2.50	1.19	2.60
1	12.7	88.9	4	19.1	5/8	63.5	76.2	88.9	1.64	3.60	1.39	3.10	1.38	3.00	1.42	3.00	1.44	3.20
1 1/4	14.2	98.6	4	19.1	5/8	69.9	82.6	95.3	2.06	4.50	1.67	3.70	1.66	3.70	1.79	3.90	1.73	3.80
1 1/2	15.7	114.3	4	22.4	3/4	76.2	88.9	101.6	3.06	6.70	2.53	5.60	2.52	5.60	2.68	5.90	2.62	5.80
2	17.5	127.0	8	19.1	5/8	76.2	88.9	101.6	3.40	7.50	2.80	6.20	2.79	6.20	3.09	6.80	2.94	6.50
2 1/2	19.1	149.4	8	22.4	3/4	82.6	101.6	114.3	5.31	11.70	4.25	9.40	4.22	9.30	4.75	10.50	4.49	9.90
3	20.6	168.1	8	22.4	3/4	88.9	108.0	120.7	7.32	16.10	5.81	12.80	5.78	12.70	6.79	14.90	6.20	13.70
3 1/2	22.4	184.2	8	22.4	3/4	95.3	108.0	127.0	8.17	18.00	7.72	17.00	7.72	17.00	9.53	21.00		
4	23.9	200.2	8	22.4	3/4	95.3	114.3	127.0	11.30	24.90	10.13	22.30	10.07	22.20	12.00	26.50		
5	23.9	235.0	8	22.4	3/4	108.0	120.7	133.4	15.12	33.30	12.58	27.70	12.52	27.60	15.96	35.20		
6	26.9	269.7	12	22.4	3/4	108.0	120.7	139.7	19.68	43.40	16.04	35.40	15.95	35.20	21.20	46.70		
8	31.8	330.2	12	25.4	7/8	120.7	139.7	152.4	30.48	67.20	24.50	54.00	24.37	53.70	34.60	76.30		
10	33.3	387.4	16	28.4	1	139.7	158.8	171.5	43.74	96.40	34.16	75.30	39.92	88.00	55.34	122.00		
12	39.6	450.9	16	31.8	1 1/8	146.1	171.5	184.2	64.41	142.00	51.26	113.00	58.70	129.40	78.90	174.00		
14	41.4	514.4	20	31.8	1 1/8	158.8	177.8	190.5	88.30	194.70	72.12	159.00	83.46	184.00	107.05	236.00		
16	44.5	571.5	20	35.1	1 1/4	165.1	190.5	203.2	112.94	249.00	90.40	199.30	106.14	234.00	139.25	307.00		
18	49.3	628.7	24	35.1	1 1/4	171.5	196.9	209.6	138.34	305.00	109.00	240.30	133.95	295.30	176.90	396.00		
20	54.1	685.8	24	35.1	1 1/4	184.2	203.2	222.3	167.37	369.00	136.00	300.00	157.65	347.60	223.17	492.00		
24	63.5	812.8	24	41.1	1 1/2	203.2	228.6	254.0	235.41	519.00	204.00	449.70	240.40	530.00	342.00	754.00		

- (4) Blind Flanges may be made with the same hub as that used for Slip-on Flanges or without hub.
- (5) The gasket surface and backside (bearing surface for bolting) are made parallel within 1 degree. To accomplish parallelism, spot facing is carried out according to MSS SP-9, without reducing thickness (t).
- (6) Depth of Socket (Y) is covered by ANSI B16.5 only is sizes through 3 inch, over 3 inch is at the manufacturer's option.

CLASS 150 FLANGES

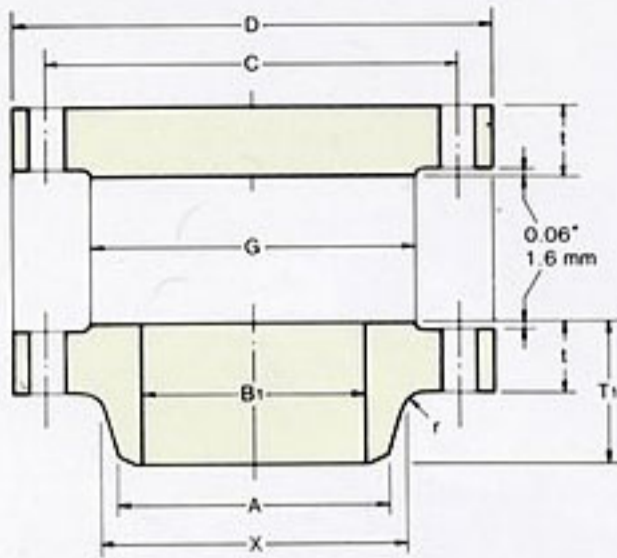

ANSI/ASME B16.47 SERIESE A FLANGES


Unit:mm

Nominal Pipe Size	Outside Diam.	O.D. of Raised Face	Diam. of Base of Hub	Thickness	BORE	
					Wall Thickness	
					9.5mm	12.7mm
	D	G	X	t	B ₁	
26	870	749.3	676.1	68.3	641.4	635.0
28	927	800.1	726.9	71.4	692.2	685.8
30	984	857.3	781.1	74.7	743.0	736.6
32	1060	914.4	831.9	80.8	793.8	787.4
34	1111	965.2	882.7	82.6	844.6	838.2
36	1168	1022.4	933.5	90.4	895.4	889.0
38	1238	1073.2	990.6	87.4	945.2	939.8
40	1289	1124.0	1041.4	90.4	997.0	990.6
42	1346	1193.8	1092.2	96.8	1047.8	1041.4
44	1403	1244.6	1143.0	101.6	1098.6	1092.2
46	1454	1295.4	1196.8	103.1	1149.4	1143.0
48	1511	1358.9	1247.6	108.0	1200.2	1193.8
50	1568	1409.7	1301.8	111.3	1251.0	1244.6
52	1626	1460.5	1352.6	115.8	1301.8	1295.4
54	1683	1511.3	1403.4	120.7	1352.6	1346.2
56	1746	1574.8	1457.5	124.0	1403.4	1397.0
58	1803	1625.6	1508.3	128.5	1454.2	1447.8
60	1854	1676.4	1569.1	131.8	1505.0	1498.6

Notes:

- (1) For the 'Bore' (B₁) other than wall thickness 0.375" (9.5mm) and 0.500" (12.7mm), refer to page 54.
- (2) Class 150 flanges will be furnished with 0.06" (1.6mm) raised face, which is included in 'Thickness' (t) and 'Length through Hub' (T₁).
- (3) Dimensional tolerance are in accordance with ANSI B16.5

WELDING-ENDS FOR WELDING-NECK FLANGES

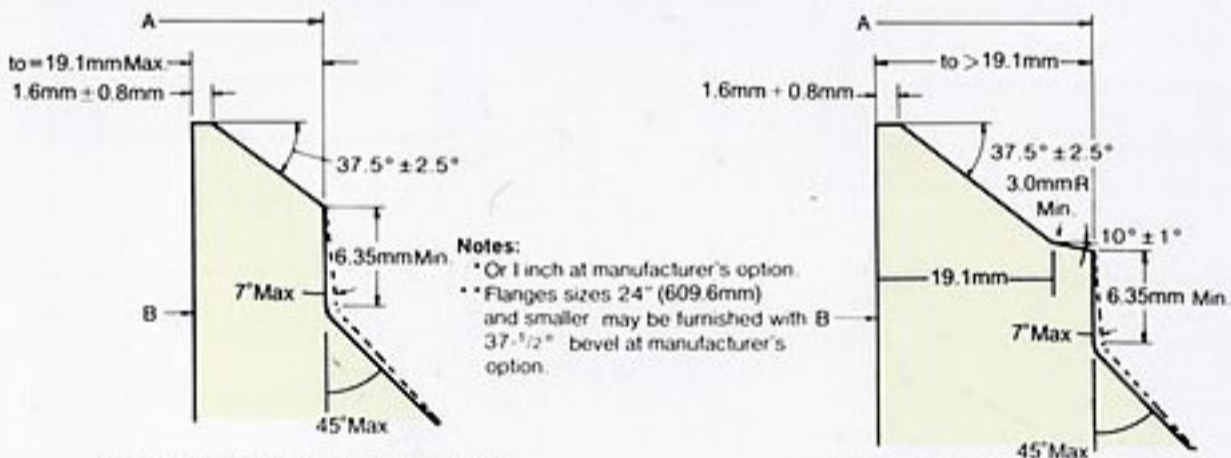

BEVEL FOR WALL THICKNESS (t)
O.19 IN. TO O.88 IN. INCLUSIVE


BEVEL FOR WALL THICKNESSES (t)
GREATER THAN O.88 IN.

Unit:mm

Nominal Pipe Size	Length thru Hub	Diam. of Hub Bevel	Radius of Fillet	DRILLING		
				Boil Circle Diam.	Number of Holes	Diam. of Holes
				T ₁	A	r
26	120.7	660.4	9.7	806.5	24	35.1
28	125.5	711.2	11.2	863.6	28	35.1
30	136.7	762.0	11.2	914.4	28	35.1
32	144.5	812.8	11.2	977.9	28	41.1
34	149.4	863.6	12.7	1028.7	32	41.1
36	157.0	914.4	12.7	1085.9	32	41.1
38	157.2	965.2	12.7	1149.4	32	41.1
40	163.6	1016.0	12.7	1200.2	36	41.1
42	171.5	1066.8	12.7	1257.3	36	41.1
44	177.8	1117.6	12.7	1314.5	40	41.1
46	185.7	1168.4	12.7	1365.3	40	41.1
48	192.0	1219.2	12.7	1422.4	44	41.1
50	203.2	1270.0	12.7	1479.6	44	47.8
52	209.6	1320.8	12.7	1530.4	44	47.8
54	215.9	1371.6	12.7	1593.9	44	47.8
56	228.6	1422.4	12.7	1651.0	48	47.8
58	235.0	1473.2	12.7	1708.2	48	47.8
60	239.8	1524.0	12.7	1759.0	52	47.8

- (4) Maximum Pressure Rating for raised face flanges is 285 psi (19.5 BARS) at atmospheric temperature.
- (5) Flange dimensions of size 12" (304.8mm) through 24" (609.6mm) flanges (except 22" (558.8mm)) are in accordance with ANSI B16.5.

CLASS 300 FLANGES

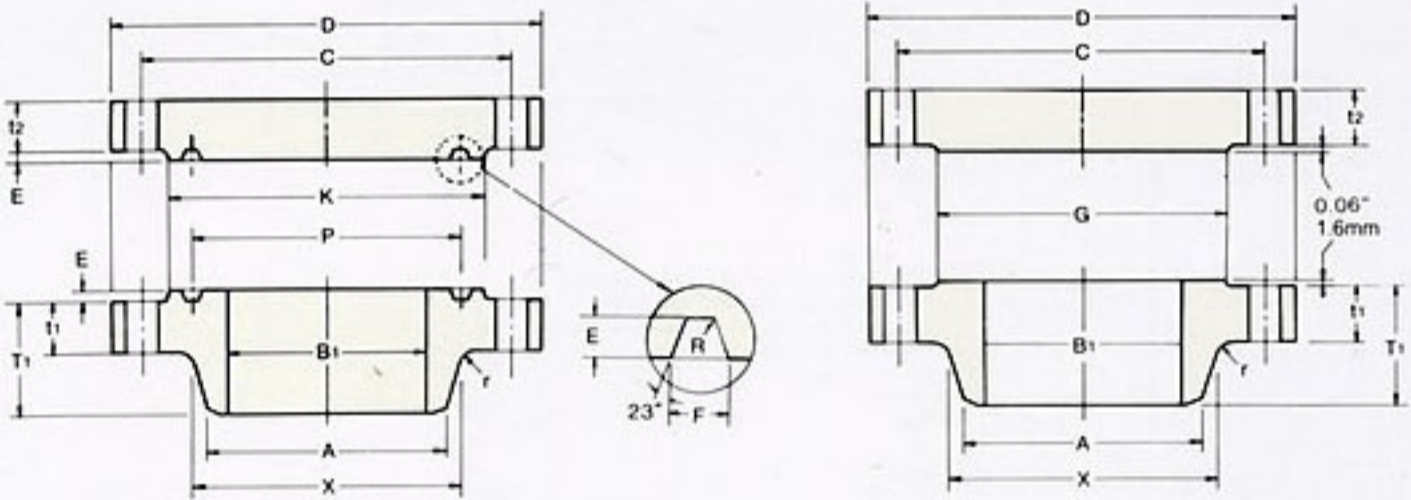

ANSI/ASME B16.47 SERIESE A FLANGES


Unit:mm

Nominal Pipe Size	Outside Diam.	O.D. of Raised Face	Diam. of Base of Hub	Thickness		BORE		Length Thru Hub	Diam. of Hub of Bevel	Radius of Fillet
				Welding Neck	Blind	Wall Thickness				
						9.5mm	12.7mm			
D	G	X	t ₁	t ₂	B ₁		T ₁	A	r	
26	972	749.3	720.9	79.2	84.1	641.4	635.0	184.2	660.4	9.7
28	1035	800.1	774.7	85.9	90.4	692.2	685.8	196.9	711.2	11.2
30	1092	857.3	827.0	91.9	95.3	743.0	736.6	209.6	762.0	11.2
32	1149	914.4	881.1	98.6	100.1	793.8	787.4	222.3	812.8	11.2
34	1207	965.2	936.8	101.6	104.6	844.6	838.2	231.6	863.6	12.7
36	1270	1022.4	990.6	104.6	111.3	895.4	889.0	241.3	914.4	12.7
38	1168	1028.7	993.6	108.0	108.0	946.2	939.8	180.8	965.2	12.7
40	1238	1085.9	1044.4	114.3	114.3	997.0	990.6	193.5	1016.0	12.7
42	1289	1136.7	1098.6	119.1	119.1	1047.8	1041.4	200.2	1066.8	12.7
44	1353	1193.8	1149.4	124.0	124.0	1198.6	1092.2	206.2	1117.6	12.7
46	1416	1244.6	1203.5	128.5	128.5	1149.4	1143.0	215.9	1168.4	12.7
48	1467	1301.8	1254.3	133.4	133.4	1200.2	1193.8	223.8	1219.2	12.7
50	1530	1358.9	1305.1	139.7	139.7	1251.0	1244.6	231.6	1270.0	12.7
52	1581	1409.7	1355.9	144.5	144.5	1301.8	1295.4	238.3	1320.8	12.7
54	1657	1466.9	1409.7	152.4	152.4	1352.6	1346.2	252.5	1371.6	12.7
56	1708	1517.7	1463.5	153.9	153.9	1403.4	1397.0	260.4	1422.4	12.7
58	1759	1574.8	1514.3	158.8	158.8	1454.2	1447.8	266.7	1473.2	12.7
60	1810	1625.6	1565.1	163.6	163.6	1505.0	1498.6	273.1	1524.0	12.7

Notes:

- (1) For the 'Bore' (B₁) other than wall thickness 0.375" (9.5mm) and 0.500" (12.7mm), refer to page 54.
- (2) Class 300 flanges will be furnished with 0.06" (1.6mm) raised face, which is included in 'Thickness' (t) and 'Length through Hub' (T₁).
- (3) Dimensional tolerances are in accordance with ANSI B16.5.

WELDING-ENDS FOR WELDING-NECK FLANGES

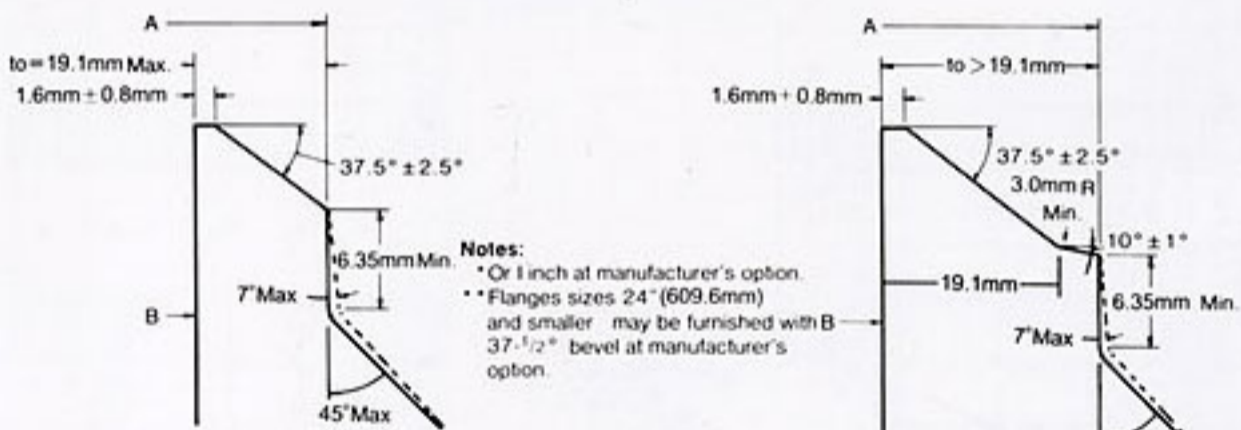

BEVEL FOR WALL THICKNESS (t) 0.19 IN. TO 0.88 IN. INCLUSIVE

BEVEL FOR WALL THICKNESSES (t) GREATER THAN 0.88 IN.

Unit:mm

Nominal Pipe Size	DRILLING			Pitch Diam.	GROOVE DIMENSIONS			Diam. of Raised Face	Ring and Groove Number
	Bolt Circle Diam	Number of Holes	Diam. of Holes		Width	Depth	Radius		
26	876.3	28	44.5	749.3	19.8	12.7	1.5	809.8	R93
28	939.8	28	44.5	800.1	19.8	12.7	1.5	860.6	R94
30	997.0	28	47.8	857.3	19.8	12.7	1.5	917.4	R95
32	1054.1	28	50.8	914.4	23.0	14.3	1.5	984.3	R96
34	1104.9	28	50.8	965.2	23.0	14.3	1.5	1035.1	R97
36	1168.4	32	53.8	1022.4	23.0	14.3	1.5	1092.2	R98
38	1092.2	32	41.1						
40	1155.7	32	44.5						
42	1206.5	32	44.5						
44	1263.7	32	47.8						
46	1320.8	28	50.8						
48	1371.6	32	50.8						
50	1428.8	32	53.8						
52	1479.6	32	53.8						
54	1549.4	28	60.5						
56	1600.2	28	60.5						
58	1651.0	32	60.5						
60	1701.8	32	60.5						

- (4) Maximum Pressure Rating for raised face flanges is 740 psi (51 BARS) at atmospheric temperature.
- (5) Flange dimensions of size 12" (304.8mm) through 24" (609.6mm) flanges (except 22" (558.8mm)) are in accordance with ANSI B16.5.