








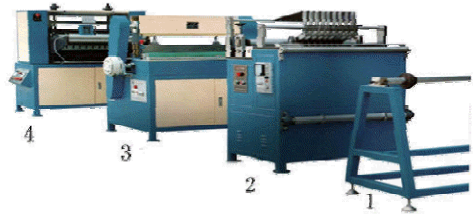

## Spin oil/fuel filter producing line

| Serial No. | Description   | Picture   | USD FOB Xingang,China |
|------------|---|---|-----------------------|
| 1          | <p><b>ZzHG-3B1100 Pleating Machine</b></p> <p><b>SLITTING MACHINE 1100 Type</b></p> <p>1. Paper feeding speed: 0.5 - 12m/min      2. Width available: 35 - 1100mm</p> <p>3. Power: 0.75KW 380V      4. Machine weight: 400KG</p> <p>5. Machine dimension: 1250mm x 680mm x 1120mm</p> <p><b>MARKING MACHINE 1100 Type</b></p> <p>1. Marking height: 8 - 55mm      2. Width maximum: 1050mm</p> <p>3. Power: 1.5KW 380V      4. Machine weight: 450KG</p> <p>5. Machine dimension: 1500mm x 850mm x 1200mm</p> <p><b>PLEATING MACHINE 1100 Type</b></p> <p>1. Pleating height: 5 - 55mm or 15 - 120mm      2. Layers pleated: 1 - 5</p> <p>3. Pleating speed: 20 - 150 pleats/min      4. Max. pleating width : 1100mm</p> <p>5. Thickness of material: 0.5 - 3mm      6. Speed adjustable motor: 1.5KW</p> <p>7. Power: 1.5KW 380V      Heater Power: 3KW      Heat Temperature: 160° C</p> <p>8. Machine weight: 730KG</p> <p>9. Machine dimension: 1430mm x 1550mm x 1400mm</p> |    | 6800                  |
| 2          | <p><b>OVEN 6 Meter</b></p> <p>Temperature Scope: 0—180 centigrade</p> <p>Stainless mesh convey belt</p> <p>Motor: 38KW</p> <p>Inter Dimension: 810 X 250MM</p>  |   | 3500                  |
| 3          | <p><b>Steel clipping machine</b></p> <p>1. Output: 10 Pieces/Min.      2. Filter height: 20 - 250mm</p> <p>3. Pleat height: 10 - 35mm</p> <p>4. Thickness of metal tape: 0.25 - 0.3mm      Width: 12mm</p> <p>    Metal tape coil inner dia.: <math>\phi \geq 150</math>mm      Outer dia: <math>\phi \leq 650</math>mm</p> <p>5. Power: 0.8KW 220V</p> <p>6. Machine weight: 650KG</p> <p>7. Machine dimension: 820mm x 750mm x 1450mm</p>   |  | 1800                  |

|   |   |  |      |
|---|---|--|------|
| 4 | <b>Filter end cap gluing machine</b>  |   | 1350 |
|   | <p>1. Output: 10 Pieces/Min.                      2. Filter height: 20 - 250mm<br/> 3. Pleat height: 10 - 35mm<br/> 4. Thickness of metal tape: 0.25 - 0.3mm      Width: 12mm<br/> Metal tape coil inner dia.: <math>\phi \geq 150\text{mm}</math>    Outer dia: <math>\phi \leq 650\text{mm}</math><br/> 5. Power: 0.8KW    220V                      6. Machine weight: 650KG<br/> 7. Machine dimension: 820mm x 750mm x 1450mm</p> |  |      |
| 5 | <b>End cap gluing Machine( AB GLUE)</b>   |   | 8000 |
| 6 | <p>Glue output: 20-70g/s<br/> Temperature scope: 30-80 °C<br/> Diameter of end cap: 60-300mm<br/> Dimension: 1250 x 1090 x 1580mm</p>   |  |      |
| 7 | <b>Spiral core making machine</b>   |   | 6800 |
|   | <p>1. Output: 20 - 25 Pieces/minute<br/> 2. Spiral filter core diameter: <math>\phi 30 - \phi 110\text{mm}</math><br/> 3. Spiral filter core length: Adjustable<br/> 4. Metal sheet thickness: 0.25 - 0.40mm<br/> 5. Motor power: 3KW    380V<br/> 6. Weight: 800KG<br/> 7. Machine Dimension: 3500 x 800 x 1380mm</p>  |  |      |
| 7 | <b>Pneumatic Spot Welding Machine</b>   |  | 2400 |
|   | <p>1. Capacity: 100KVA<br/> 2. Voltage: 380V<br/> 3. Current: 263A<br/> 4. Compressed air pressure: 0.4Mpa<br/> 5. Machine weight: 700KG<br/> 6. Machine Dimension: 1070 x 520 x 950mm</p>  |  |      |

|    |   |  |      |
|----|---|--|------|
| 8  | <b>Filter Housing Sealing Machine</b>   |   | 4000 |
|    | <p>1. Output: 12 pieces/min.</p> <p>2. Diameter of filter house available: <math>\phi</math> 50--<math>\phi</math> 130mm</p> <p>3. Height of filter (house) available: 50 - 325mm</p> <p>4 Thickness of metal material: 0.3 - 1.2mm</p> <p>5 Air pressure: 0.6Mpa</p> <p>6 Power of motor: 4KW 380V</p> <p>7 Machine weight: 800KG</p> <p>8 Machine Dimension: 940 x 640 x 2150mm</p> |  |      |
| 9  | <b>Tapping machine</b>  |   | 1700 |
|    | <p>Capacity of produce: 16pcs/min</p> <p>Diameter: M16-M38</p> <p>Diameter of filter: 60-130MM</p>  |  |      |
| 10 | <b>Logo printer</b>   |   | 2350 |
|    | <p>1.Max. diameter of filter: <math>\leq</math>125MM</p> <p>2.Max.length of filter: <math>\leq</math>320MM</p> <p>3.Speed: 1000pc/hour</p> <p>4.Air pressure: 0.6Mpa</p> <p>5.Power supply: 380V</p> <p>6.Weight: 100KG</p> <p>7.Dimension: 700 x 900 x 1250MM</p>  |  |      |
| 11 | <b>Filter leak testing machine</b>  |  | 2500 |
|    | <p>1.Pressure to be tested: 0~0.8Mpa, adjustable</p> <p>2.Accuracy for Barometer: 1.5</p> <p>3.Power of motor: 0.55KW</p> <p>4.Weight: 430KG</p> <p>5.Dimension: 1050 x 650 x 1900MM</p>  |  |      |

41200