

**UNION<sup>®</sup>  
BRIGHT**

**PROFESSIONAL  
LIGHTING**

**UNION<sup>®</sup>  
BRIGHT**

广州联熙舞台灯光设备有限公司  
Union Bright Stage Lighting Co.,Ltd

**PROFESSIONAL  
LIGHTING**



广州联熙舞台灯光设备有限公司  
Union Bright Stage Lighting Co.,Ltd

手机/Mobile: 0086-013265924846  
传真/Fax: 86-020-28805956  
Skype: union-bright-lighting  
MSN: union-bright@hotmail.com  
www.pro-led-lighting.com

电话/Tel: 86-020-22350186  
邮箱/E-mail: Market@union-bright.com  
Website: www.union-bright.com

地址: 广东省广州市白云区石井镇红星工业路11号  
ADD: Address: No.11 Hongxing Industrial Road, Shijing Town, Baiyun District, Guangzhou  
City, Guangdong 510430 China

广州联熙舞台灯光设备有限公司  
Union Bright Stage Lighting Co.,Ltd  
[www.union-bright.com](http://www.union-bright.com)

## COMPANY PROFILE / 公司简介

广州联熙舞台灯光设备有限公司是一家集专业舞台灯光设备产品研发、生产、国内外销售和服务于一体的科技型企业。本公司所生产舞台灯光设备系列以其独特的外观，稳定的质量，一流的工艺，优质的服务及物美价廉赢得社会各界人士的认可，在同类产品中“性价比”高。

我们的产品适用于各类中档、中高档舞台、歌舞剧院、电视演播厅、多功能会议厅、演艺广场、机关大礼堂、娱乐城、DISCO夜总会、酒吧、慢酒吧、迪斯科、卡拉OK、家庭Party等娱乐场所。

主要产品有：电脑摇头灯、电脑扫描灯、电脑追光灯、激光灯、频闪灯、图案花灯、程序效果灯、户外灯、烟雾机、泡泡机、雪花机、喷火机、舞台灯、多种DMX512控制台、专业LED等。

公司秉承“诚信、创新”之理念，孜孜以求新技术、新工艺、新设计不断推出新产品凭着一份真诚、一份实在，赢得品牌的认同和诚信的美誉。——几年来，公司秉承追求卓越、品质为先、创造精品、扬名国际的企业宗旨，致力于将联熙品牌打造成国际舞台灯光领域的知名品牌。

我们愿与国内外文艺团体，文艺器材经营实体、工程商、出口商通力合作，共同为文艺演出专业灯光音响市场创造辉煌。

Guangzhou Union Bright stage lighting Equipment Factory is a science and technology enterprise, which specialized in R&D ,production, promotion and service of professional stage lighting equipment at home and abroad. Our products, series of stage lighting equipment ,for its unique appearance, stable quality , first-class technology, quality service and reasonable price,have won the recognition of the community, superior to its high cost performance when compared with similar products .

Our products are suitable for various entertainment and recreation place, such as secondary stage, theatre, TV showroom, multimedia hall, show square, organ hall, recreational city, Disco club, Bar, KTV, home party and so on.

Main products: Stage Lighting, Moving Heads, High power led par, LED pixel screens, LED tubes, LED wall washer, LED display screen, LED moon flower, Outdoor Lights, Search lights, Sky rose, City color lights, Fog Machine, Bubble Machine, Snow Machine, Flame Machine, Foam Machine, Haze Machine, Smoke Machine, Scanners, Follow Spots, Laser Lights, Strobe Lights, Flash lights, Effect Lights, Stage Projectors, Intelligent lights, Party lights, Disco lights, Dimmer, Dmx Controller, Par cans, Pinpots, Mirror balls, Black lights and so on.

Company adhered to the philosophy of "Integrity, innovation" , pursued new technologies and new techniques, new design ,launched new products continuously, with a share of empressment, and reality, to win the brand recognition and reputation for integrity. ---- Over the past few years, our Company have followed the purpose of pursuit of excellence, quality first, the creation of quality products, recognized by the international business , and we are committed to make the brand "Union-Bright" become the well-known brand of the field of international stage lighting.

We are willing to work together with domestic and foreign art groups, art equipment operating entity, contractor, importers and exporters, to create a brilliant future of professional lighting and audio market for the Theatrical performances .

## CONTENTS / 目录

|                                       |       |
|---------------------------------------|-------|
| 摇头光束灯系列 / Moving Head Beam Series     | 01~03 |
| 电脑摇头灯系列 / Computer Moving Head Series | 04~10 |
| LED 摇头灯系列 / LED Moving Head Series    | 11~13 |
| LED 帕灯系列 / LED PAR Light Series       | 14~16 |
| 洗墙灯系列 / Wash Wall Light Series        | 17    |
| LED 效果灯系列 / LED Effect Light Series   | 18~19 |
| 追光灯系列 / Follow Spot Series            | 20    |
| 舞台效果机系列 / Stage Effect Machine Series | 21    |
| 激光灯系列 / Laser Light Series            | 22    |
| 控制台系列 / Controller Series             | 23    |
| 配件系列 / Accessories Series             | 24    |



UB-B015

5R Philips 200W 光束灯  
5R 200W Beam Light Philips



技术参数/TECHNICAL PARAMETERS

- 灯 泡: PHILIPS MSD Platinum 5R (8000K色温, 2000小时)
- 功 耗: 230V/50HZ/350VA
- 光学器件: 3件透镜式镜头组, 变焦0°-3.9°, 电子聚焦, 20米处, 50000LUX
- 通 道: 17个国家标准DMX512通道和20个国家标准DMX512通道
- 水平扫描: 540° (16Bit精度扫描) 垂直扫描: 280° (16Bit精度扫描)
- 色 片 盘: 14个插拔式+白光, 带双向选择的彩虹效果
- 棱 镜 盘: 8棱镜, 可正反方向选择, 并具有棱镜定位功能
- 频 闪: 双翼刀频闪频率最高可以13次每秒, 并可选择随机频闪及脉冲频闪
- 调 光: 0%~100%线性调光
- 雾 化: 0%~100%线性雾化
- 美观的蓝白液晶显示, 采用穿梭轮选择菜单, 方便快捷
- 电子整流器可选: 使产品重量更轻, 亮度更强, 灯泡更稳定, 更环保, 更节能遥控开关灯泡
- 开关电源可选: AC110V~240V, 50/60HZ

- Bulb: Philips MSD Platinum 5R (8000K color temperature, 2000 hours)
- Power Consumption: 230V 50HZ 350VA
- Optical Device: three lens group, 0°-3.9° zoom
- Electronic Focus: 20 meters, 50000LUX
- Channel: 17 international standard DMX512 channel and 20 international standard DMX512 channel
- Level scan: 540° (16bit precision scan)
- Vertical scan: 280° (16bit precision scan)
- Color wheel: 14 inserted color and white light with two-way rotating and rainbow effect. Rotation Gobo Wheel 17 inserted rotation gobos and white circle with design jitter and arbitrary positioning function.
- Prism: 8 prism with positive and negative rotation and prism location function.
- Shut: Double pole shut up to 13 times per second, random shut and pulse shut can be chose
- Dimmer: 0%~100% linear frost
- Beautiful blue and white LCD and pulley select menu is convenient and quick.
- Electronic ballast can be chose: make the product more light and bright. Lamp more stable environmental protection and more energy saving remote control switch bulb
- Switching power supply optional: AC-110V~240V, 50/60HZ



UB-B013

300W 光束灯  
300W Beam Light



技术参数/TECHNICAL PARAMETERS

- 电 压: AC90V~260V, 50Hz~60Hz
- 消耗功率: 450W/900W
- 灯 泡: Philips Golden MSR 300/700/2 Mini Fastit
- 运行方式: DMX, 主副机, 自走
- 通 道: 12/16通道
- 显 示: 蓝/白光液晶显示屏
- 水平角度: 540degree(16bit)
- 垂直角度: 270degree(16bit)
- 颜 色 盘: 18种颜色+白光, 带彩虹效果和半色效果
- 旋转图案: 6种图案+白光, 带图案流水, 图案抖动和图案自转效果
- 功 能: 频闪(1-13次/秒), 雾化(0%-100%), 调焦, CMY混色系统, 棱镜, 棱镜自转
- 尺 寸: 396x390x630mm
- 净 重: 17kg
- 毛 重: 19kg

- Voltage: AC90V~260V, 50Hz~60Hz
- Power consumption: 450W/900W
- Bulb: Philips Golden MSR 300/700/2 Mini Fastit
- Operation mode: DMX, main and auxiliary machine, since go
- Channels: 12 CH/16 CH
- Shows: Blue/white light LCD screen
- Level Angle: 540 degree (16 bit)
- Vertical Angle: 270 degree (16 bit)
- Color dish: 18 kinds of color + white light, with a rainbow effect and half color effect
- Rotating pattern plate: 6 design + white light, water with design, design jitter and design rotation effect.
- Features: stroboscopic (1-13 times/SEC) and atomization (0% - 100%), convergence, CMY mixed color system, prism, prism rotation
- Size: 396x390x630mm
- Net Weight: 17kg
- Gross/Weight: 19kg





UB-B014

700W 光束灯  
700W Beam Light



|    |                             |  |
|----|-----------------------------|--|
| 1  | X轴<br>Pan                   |  |
| 2  | Y轴<br>Tilt                  |  |
| 3  | X轴微调<br>Pan Fine            |  |
| 4  | Y轴微调<br>Tilt Fine           |  |
| 5  | X/Y速度<br>X/Y Speed          |  |
| 6  | 频闪<br>Strobe                |  |
| 7  | 开关<br>Lamp on/off           |  |
| 8  | 图案自转<br>Gobo rotate         |  |
| 9  | 图案旋转<br>Rotating            |  |
| 10 | 图案自转<br>Gobo rotate         |  |
| 11 | 图案震动<br>Pattern vibration   |  |
| 12 | 光面<br>Iris                  |  |
| 13 | 调焦<br>Focus                 |  |
| 14 | 雾化<br>Frost                 |  |
| 15 | 线性调光<br>Linear closed light |  |
| 16 | 复位<br>Reset                 |  |

技术参数/TECHNICAL PARAMETERS

- 电 压: AC110~240V,50/60HZ
- 灯 泡: Philips MSD GOLD 700/2Mini Fastfit
- 通道模式: 16个国际标准DMX512通道
- 水平扫描: 540° 或630° (16Bbit精度扫描)均匀的CMY混色系统
- 色 片 盘: 8个插拔式色片+白光, 带双向旋转的彩虹效果具有多达30个预设CMY及颜色混色效果和颜色宏异步运作
- 旋转图案盘: 6个插拔式的旋转图案片+白圈, 带图案抖动和图案任意定位功能可插拔式色片, 图案片系统, 方便更换色片和图案片片
- 棱 镜 盘: 旋转3棱镜可正反方向旋转, 并具有棱镜定位功能
- 频 闪: 双制刀频闪最高可达到13次每秒, 并可选择随机频闪及脉冲频闪
- 调 光: 0%~100%线性调光
- 雾 化: 0%~100%线性雾化美观的蓝白液晶显示电子整流器可选, 重量更轻, 亮度更强, 灯泡更稳定
- 包装尺寸: 715X465X570mm
- 净 重: 40kg
- 毛 重: 45kg

- Voltage: AC110V~240V,50/60HZ
- The light bulb: Philips MSD 700/2 Mini FastFit GOLD
- Channel mode: 12 of an international standard DMX512 channel
- Level: 540° or scan 630° (16bit precision scan) Even CMY mixed color system
- Color piece dish: eight inserted type color piece of white light with two-way rotating+rainbow effect
- With as many as 30 default CMY and color mixed effect and color dishmacro asynchronous operation
- Rotating pattern plate: six inserted the rotation of the type of+white circle design with design jitter and design arbitrary positioning function
- Can be inserted type color piece, the design of system, convenient change color piece and design pieces
- The prism dish: rotation direction can be positive and negative spin 3 prism, and has the prisms location function
- Stroboscopic: double pole stroboscopic frequency maximum of 13 times per second, and can choose the random stroboscopic and pulse frequency flash
- Light: 0%~100% linear atomization, Beautiful blue and white liquid crystal display, Electronic ballast optional, lighter weight, brightness, stronger, more, stable light bulb
- Packing size: 71.5 x 46.5 x 57cm
- Net Weight: 40kg
- Gross/Weight: 45kg



UB-B012

1200W 电脑摇头灯 —— 24通道  
1200W Moving Head Spot —— 24CH



|    |                                |  |
|----|--------------------------------|--|
| 1  | X轴<br>Pan                      |  |
| 2  | Y轴<br>Tilt                     |  |
| 3  | X轴微调<br>Pan Fine               |  |
| 4  | Y轴微调<br>Tilt Fine              |  |
| 5  | X/Y速度<br>X/Y Speed             |  |
| 6  | 调光<br>Dimmer                   |  |
| 7  | 频闪<br>Strobe                   |  |
| 8  | CMY青色<br>CMY Cyan              |  |
| 9  | CMY品红<br>CMY Magenta           |  |
| 10 | CMY黄色<br>CMY Yellow            |  |
| 11 | 雾化<br>Frost                    |  |
| 12 | CMY自转<br>CMY self<br>pannelled |  |
| 13 | 颜色<br>Color                    |  |
| 14 | 颜色盘速度<br>Color wheel<br>speed  |  |
| 15 | 图案自转<br>Rotating               |  |
| 16 | 图案自转<br>Gobo rotate            |  |
| 17 | 图案自转<br>Rotating               |  |
| 18 | 图案自转<br>Gobo rotate            |  |
| 19 | 棱镜<br>Prism                    |  |
| 20 | 棱镜自转<br>Prism Rotating         |  |
| 21 | 光面<br>Iris                     |  |
| 22 | 调焦<br>Focus                    |  |
| 23 | 放大<br>Zoom                     |  |
| 24 | 复位<br>Reset                    |  |

技术参数/TECHNICAL PARAMETERS


- 电 压: 220V/240V AC 50~60Hz
- 光 源: HMI 1200W 短弧放电泡
- 色 温: 7000K
- 功 率: 1500W
- 灯 座: SFC-10
- 通 道: 24通道
- 尺 寸: 495 x 400 x 770mm
- 包装尺寸: 620 x 605 x 895mm
- 净 重: 52.5kg
- 毛 重: 58kg

- Voltage: 220V/240V AC 50~60Hz
- Light Source: HMI 1200W short arc discharge lamp
- Power: 1500W
- Color Temperature: 7000K
- Base: SFC-10
- Channel: 24 CH
- Size: 495 x 400 x 770mm
- Packing Size: 620 x 605 x 895mm
- Net Weight: 52.5kg
- Gross/Weight: 58kg



UB-B010

18CH 1200W(聚光) 电脑摇头灯  
18CH 1200W(Spot) Moving Head

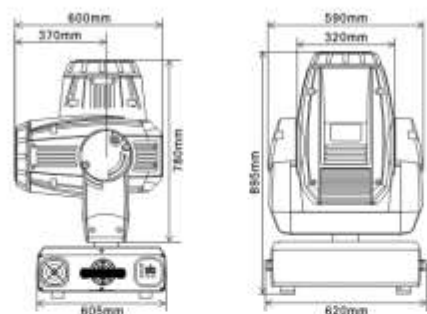


技术参数/TECHNICAL PARAMETERS

- 电压: 220V/240V AC 50-60Hz
- 光源: HMI 1200W 短弧放电泡
- 色温: 7000K
- 功率: 1500W
- 灯座: SFC-10
- 通道: 18CH
- 尺寸: 495 × 400 × 770mm
- 包装尺寸: 620 × 605 × 895mm
- 净重: 52.5kg
- 毛重: 58kg
- Voltage: 220V/240V AC 50-60Hz
- Light Source: HMI 1200W short arc discharge lamp
- Power: 1500W
- Color Temperature: 7000K
- Base: SFC-10
- Channel: 18CH
- Size: 495 × 400 × 770mm
- Packing Size: 620 × 605 × 895mm
- Net Weight: 52.5kg
- Gross Weight: 58kg

|    |                        |        |
|----|------------------------|--------|
| 1  | 频闪 Strobe              | 0-100% |
| 2  | 调光 Dimmer              | 0-100% |
| 3  | X轴 Pan                 | 0-360° |
| 4  | Y轴 Tilt                | 0-120° |
| 5  | X/Y速度 X/Y Speed        | 0-100% |
| 6  | 颜色盘A Color wheel       | 0-100% |
| 7  | 颜色盘B Color wheel       | 0-100% |
| 8  | 图案 Rotating            | 0-100% |
| 9  | 图案旋转 Gobo rotating     | 0-100% |
| 10 | 固定图案 Replaceable gobos | 0-100% |
| 11 | 调焦放大 Focus Zoom        | 0-100% |
| 12 | 棱镜 Prism               | 0-100% |
| 13 | 棱镜旋转 Prism Rotating    | 0-100% |
| 14 | 光闸 Iris                | 0-100% |
| 15 | 雾化 Frost               | 0-100% |
| 16 | 复位 Reset               | 0-100% |
| 17 | X轴微调 Pan Fine          | 0-100% |
| 18 | Y轴微调 Tilt Fine         | 0-100% |

UB-B009

1200W 摇头染色灯  
1200W Moving Head Wash

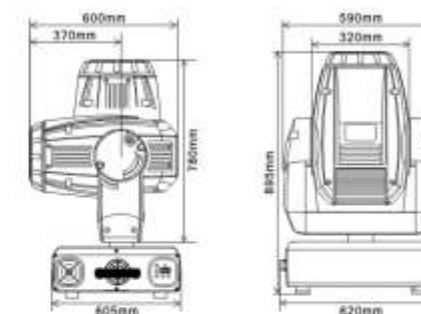

技术参数/TECHNICAL PARAMETERS

- 电压: 220V/240VAC 50-60Hz
- 光源: HMI 1200W
- 总功率: 1500W
- 色温: 7000K
- 通道: 16通道
- 尺寸: 585X480X840mm
- 包装尺寸: 620 × 605 × 895mm
- 净重: 50kg
- 毛重: 55.5kg
- 马达数: 10
- Power: 220V/240VAC 50-60Hz
- Lamp: HMI 1200W
- Power Consumption: 1500W
- Color Temperature: 7000K
- Channel: 16 CH
- Size: 585X480X840mm
- Packing Size: 620 × 605 × 895mm
- Net Weight: 50kg
- Gross Weight: 55.5kg
- Motors: 10

|    |                          |           |
|----|--------------------------|-----------|
| 1  | 开关 Lamp on/off           | 0-100%    |
| 2  | 频闪 Strobe                | 0-100%    |
| 3  | 颜色 Color                 | 0-100%    |
| 4  | 调光 Dimmer                | 0-100%    |
| 5  | CMY青色 CMY Cyan           | 0-100%    |
| 6  | CMY品红 CMY Magenta        | 0-100%    |
| 7  | CMY黄色 CMY Yellow         | 0-100%    |
| 8  | G/M/Y速度 G/M/Y Speed      | 0-100%    |
| 9  | 棱镜效果 Prism Effect        | 0-100%    |
| 10 | X轴 Pan                   | 0-360°    |
| 11 | Y轴 Tilt                  | 0-120°    |
| 12 | X/Y速度 X/Y Speed          | 0-100%    |
| 13 | 调焦 Focus                 | 0-100%    |
| 14 | CMY自走 CMY self propelled | FAST SLOW |
| 15 | 光闸 Iris                  | 0-100%    |
| 16 | 复位 Reset                 | 0-100%    |



UB-B008


16通道 575W(聚光) 电脑摇头灯  
16/18CH 575W(Spot) Moving Head



技术参数/TECHNICAL PARAMETERS

- 电压: 220-240V 50-60HZ
- 保险: 10A
- 功率: 800W
- 灯泡: HMI 575W
- 色温: 6500K
- 通道: 16CH/18CH可选
- 包装尺寸: 515 x 445 x 795mm
- 净重: 43kg
- 毛重: 45kg

- Voltage: 220-240V 50-60HZ
- Fuse: 10A
- Power: 800W
- Lamp: HMI 575W
- Color temperature: 6500K
- Channel: 16CH/18CH Choice
- Packing size: 515 x 445 x 795mm
- Net Weight: 43kg
- Gross/Weight: 45kg

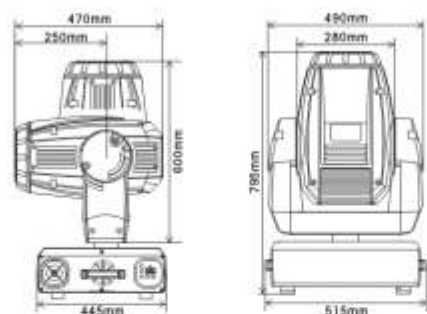

|    |                          |  |
|----|--------------------------|--|
| 1  | 颜色盘A<br>Color wheel      |  |
| 2  | 颜色盘B<br>Color wheel      |  |
| 3  | 频闪<br>Strobe             |  |
| 4  | 调光<br>Dimmer             |  |
| 5  | X轴<br>Pan                |  |
| 6  | Y轴<br>Tilt               |  |
| 7  | X/Y速度<br>X/Y Speed       |  |
| 8  | 光面<br>Iris               |  |
| 9  | 固定图案<br>Replaceable gobo |  |
| 10 | 图案<br>Rotation           |  |
| 11 | 图案旋转<br>Gobo rotation    |  |
| 12 | 棱镜旋转<br>Prism Rotating   |  |
| 13 | 调焦<br>Focus              |  |
| 14 | X轴微调<br>Pan Fine         |  |
| 15 | Y轴微调<br>Tilt Fine        |  |
| 16 | 复位<br>Reset              |  |

UB-B006


12CH 575W(聚光) 电脑摇头灯  
12CH 575W(Spot) Moving Head



技术参数/TECHNICAL PARAMETERS

- 电压: 220V/50Hz
- 灯泡: HMI 575W
- 耗电量: 680W
- 通道: 12通道
- 包装尺寸: 470 x 430 x 590mm
- 净重: 29kg
- 毛重: 33kg

- Power: 220V/50Hz
- Lamp: HMI 575W
- Power Consumption: 680W
- Channel: 12CH
- Packing Size: 470 x 430 x 590mm
- Net Weight: 29kg
- Gross/Weight: 33kg

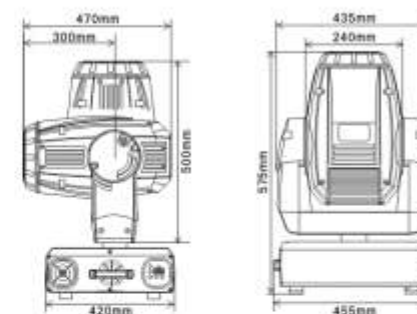

|    |                        |  |
|----|------------------------|--|
| 1  | 颜色盘<br>Color wheel     |  |
| 2  | 图案<br>Rotation         |  |
| 3  | 图案旋转<br>Gobo Rotate    |  |
| 4  | 频闪<br>Strobe           |  |
| 5  | X轴<br>Pan              |  |
| 6  | Y轴<br>Tilt             |  |
| 7  | X/Y速度<br>X/Y Speed     |  |
| 8  | 棱镜<br>Prism            |  |
| 9  | 棱镜旋转<br>Prism Rotating |  |
| 10 | 调焦<br>Focus            |  |
| 11 | 图案旋转<br>Gobo rotation  |  |





UB-B005

250W 电脑摇头灯(聚光)  
Moving Head (Spot) 250W



技术参数/TECHNICAL PARAMETERS


- 电 压: 220V/50Hz
- 灯 泡: MSR 575W/2
- 耗 电 量: 680W
- 控制信号: DMX 512
- 控制通道: 16通道
- 包装尺寸: 550 × 540 × 670mm
- 净 重: 40kg
- 毛 重: 43kg
- 马 达 数: 12

- Power: 220V/50Hz
- Lamp: MSR 575W/2
- Power Consumption: 680W
- Control Signal: DMX 512
- Control Channels: 16CH
- Packing Size: 550 × 540 × 670mm
- Net Weight: 40kg
- Gross/Weight: 43kg
- Motors: 12

技术参数/TECHNICAL PARAMETERS

- 电 压: 220-240V 50-60HZ
- 保 险: 10A
- 功 率: 800W
- 灯 泡: HMI 575W
- 色 温: 6500K
- 通 道: 14通道
- 包装尺寸: 515 × 445 × 795mm
- 净 重: 43kg
- 毛 重: 45kg

- Voltage: 220-240V 50-60HZ
- Fuse: 10A
- Power: 800W
- Lamp: HMI 575W
- Color temperature: 6500K
- Channel: 16CH
- Packing size: 515 × 445 × 795mm
- Net Weight: 43kg
- Gross/Weight: 45kg

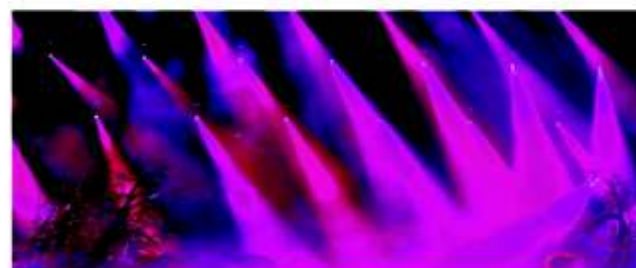

UB-B008

16CH 575W 电脑染色灯  
16CH 575W Moving Head(wash)



UB-B016

电脑巫师灯  
Computer Wizard Lamp



技术参数/TECHNICAL PARAMETERS

- 电 压: 220V-240V/50-60HZ
- 功 率: 300W, 保险管T3--6A
- 光 源: 250型号 放电泡
- 颜 色: 7颜色+白光+3个玻璃星图案
- 图 案: 13种图案片+1个固定图案盘
- 调 焦: VOTE巫师灯旋转对焦
- 通 道: 11H国际标准通道
- 频 闪: 频闪、调光效果1-7次/秒
- 扫 描: 独特旋转镜片筒可扫描180°
- 控 制 式: DMX512, 音乐触发, 自动
- 显 示: LCD液晶显示屏
- 尺 寸: 552x516x208mm
- 包装尺寸: 660x590x320mm
- 总 重: 18kg
- 净 重: 16kg

此VOTE巫师灯具有DMX接收、同步、自动、声控, 等多种工作方式, 采用按键选择和数码显示的操作界面, 适合中小型娱乐场所, 在自动连机工作模式下, 内置16个运行程序, 几十种神奇的灯光效果。

- Wizards light
- Technical parameters
- Model: ND-202
- Voltage: 220v-240v/50-60HZ.
- Power: 300W, Fuse T3 - 6A.
- Source: 250 Type electric light bulbs.
- Color: 7 colors + white + 3 glass star pattern.
- Pattern: 13 types of pattern pieces fixed gobo wheel + 1.
- Focus: VOTE shaman light Turn the focus.
- Channel: 11H international standard channels.
- Strobe: strobe, dimming effect of 1-7 times / sec.
- Scan: a unique rotating lens barrel can scan 180°.
- Control Type: DMX512, music trigger, automatic.
- Display: LCD liquid crystal display.
- Size: 552x516x208mm
- Packing Size: 660x590x320mm
- Total Weight: 18kg
- Gross/Weight: 16kg

The lamps have DMX receiver VOTE wizard, synchronization, automatic, voice, and other work, using key selection and digital display interface, suitable for small and medium places of entertainment, even the machine in automatic mode, the builtin 16 runs program, dozens of magical lighting effects.



## UB-A089

36颗10W LED 调焦摇头灯  
36Pcsx10W LED ZOOM RGBW 4in 1



### 技术参数/TECHNICAL PARAMETERS

- 电压: AC110-245V, 50/60Hz
- 功率: 420W
- 灯珠: 36PCSX10W LED (4合1)
- 通道: 16个标准DMX512通道
- 保险丝: 5/2A,  $\Phi 5 \times 20\text{mm}$
- 环境温度: 104° F(40°C)
- 水平: 水平540° 可选, 16bit微调
- 垂直: 垂直240° 可选, 16bit微调
- 水平垂直独立线性调速扫描微调, X/Y轴16BIT扫描细分精确定位
- 电子调光: 10-100%线性调节
- 多种频闪: 1-18次/秒(常规频闪, 雷随机频闪, 突暗渐亮频闪, 突亮渐暗频闪) 线性调节RGB256x256x256极无混色
- 控制模式: DMX512信号控制模式, 主从控制模式(多台同步) 带自走程序 声控模式。闭光定位运行功能。可在控制台上编辑单台灯或群组灯的X/Y轴正反向
- 尺寸: 460 x 335 x 385mm
- 净重: 10.2kg

- Voltage: AC110-245V, 50/60Hz
- Power: 420W
- Beads: 36PCSX10W LED (4 in 1)
- The 16 standard DMX512 channel
- Fuse: 5 / 2A, with 5 x 20mm
- Maximum ambient temperature: 104 ° (40 °C)
- Level: level 540 °, 16bit trimmer
- Vertical: vertical 240 °, 16bit trimmer
- Horizontal vertical independent linear speed Scan tuning, X / Y axial 16BIT scan subdivision precision positioning
- Electronic dimming: 10-100% linear regulator
- Multiple strobe: 1-18 / sec (conventional stroboscopic, lightning flash, random strobe, suddenly dark gradually bright strobe, Sudden light dimming strobe.) Linear regulator
- RGB256 x 256 x 256 polar-nonpolar color mixing
- Control mode: DMX512 signal control mode, master-slave control mode (multiple synchronized with self walking program) Voice control mode. Closed light positioning function. In the console under a single table or cluster lamp X / Y axis direction
- Dimensions: 460x335x385mm
- Net Weight: 10.2kg



|    |                       |  |
|----|-----------------------|--|
| 1  | 总调光<br>Dimmer         |  |
| 2  | 红色<br>Red             |  |
| 3  | 绿色<br>Green           |  |
| 4  | 蓝色<br>Blue            |  |
| 5  | 白色<br>White           |  |
| 6  | 频闪<br>Strobe          |  |
| 7  | 频闪效果<br>Strobe Effect |  |
| 8  | 自走速度<br>Auto speed    |  |
| 9  | 功能<br>Function        |  |
| 10 | X轴<br>Pan             |  |
| 11 | Y轴<br>Tilt            |  |
| 12 | 复位<br>Reset           |  |

## UB-A089B

36颗X10W RGBW 4in 1  
36PcsX10W RGBW 4in 1



### 技术参数

- 电压: 110-245V 50/60Hz
- 功率: 420W
- 灯珠: 36PCSX10W LED (4合1)
- 通道: 24个标准DMX512通道
- 水平: 水平540° 可选, 16bit微调
- 垂直: 垂直240° 可选, 16bit微调
- 调焦功能, 水平垂直独立线性调速
- 电子调光: 10-100%线性调节
- 多种频闪: 1-18次/秒(常规频闪, 雷随机频闪, 突暗渐亮频闪, 突亮渐暗频闪) 线性调节RGB256x256x256极无混色
- 控制模式: DMX512信号控制模式, 主从控制模式(多台同步) 带自走程序 声控模式。
- 闭光定位运行功能。
- 尺寸: 460 x 335 x 385mm

- Voltage: 110-245 v 50/60 hz
- Power: 420 w
- Light bead: 36 pcsx10w LED (4 \$1)
- 24 standard DMX512 channel
- Level: level 540 ° optional, 16 bit trimming
- Vertical: vertical 240 ° optional, 16 bit trimming
- Focus function, Horizontal vertical independent linear speed regulation
- Electronic dimming: 10-100% linear adjustment
- A variety of stroboscopic: 1-18 times/SEC (conventional stroboscopic, lightning frequency flash, random stroboscopic, tu dark gradually bright stroboscopic,
- Tu dim the light frequency flash.) Linear control the promise melange
- Control mode: DMX512 signal control mode, master-slave control mode (many sets of synchronous) zone since go program acoustic control mode.
- Closed light positioning operation function,
- Size: 460 x 335 x 385 mm

## UB-A090

37颗X10W LED 摇头光束灯  
37X10W Beam Moving Head Light



### 技术参数

- 电压: 100-240V, 50/60Hz
- 功率: 140W
- 灯珠: 13\*红, 12\*绿, 12\*蓝
- 驱动电流: 700/1000mA
- 颜色范围: 1370万种颜色(0-100%饱和度可调)
- 显示板控制: 自走模式/自定义编程
- 控制协议: DMX512
- 通道模式: 11/15通道
- 扫描角度水平: 540°
- 垂直: 270°
- 扫描精度: 8-16bit
- 特殊功能: 水平/垂直可设定在运行中闭光, 水平/垂直扫描角度范围可设/水平/垂直反转
- 尺寸: 295X190X344mm
- 重量: 6.5kg

- Voltage: 100-240V, 50/60Hz
- Rated power: 140 W
- Bead number: 13 \* red, 12 \* green, 12 \* blue
- Drive current: 700/1000 mA
- Color range: 13.7 million colours (0-100% saturation adjustable)
- Display panel control: since go model/custom programming
- Control protocol: DMX512
- Channel mode: 11 channel and channel
- Scanning Angle level: 540 °
- Vertical: 270 °
- Scanning precision: 8-16 bit
- Special features: horizontal/vertical can be set in the operation of the closed light, Horizontal/vertical scanning Angle range can be set/horizontal/vertical reversal
- Size: 295 \* 190 \* 344 mm
- Weight: 6.5 kg



UB-A070

108颗X1/3W LED摇头灯(调焦)  
108PcsX1/3W LED Moving Head Light (Zoom)

UB-A076

60W LED摇头灯  
60W LED Moving Head Light



技术参数/TECHNICAL PARAMETERS

- 电 压: AC110V~240V 50/60HZ
- 光 源: 108颗1W/3W大功率LED(红色:24PCS, 绿色:28PCS, 蓝色:28PCS, 白色:28PCS)
- 总 功 率: 150W/350W
- 通 道: 12通道
- 水平扫描: 540° 或 630° (16BIT精度扫描)
- 垂直扫描: 265° (16BIT精度扫描)
- 包装尺寸: 460X335X385mm
- 净 重: 9kg
- 毛 重: 11kg

- Power: AC110v~240v 50/60Hz
- Source: 108pcs 3w high power LED (R:24PCS G:28PCS B:28PCS W:28PCS)
- Total power:150W/350W

- Channel:12 CH
- Pan scan: 540° or 630° (16 bit accurately scan)
- Tilt scan: 265° (16 bit accurately scan)
- Packing size: 460X335X385mm
- Net Weight:9kg
- Gross/Weight: 11kg



技术参数/TECHNICAL PARAMETERS

- 电 压: AC90V~120V/200V~240V 50~60HZ
- 光 源: 单颗60WLED
- 总 功 率: 150W
- 运行模式: DMX512, 声控, 自走, 主从
- 通 道: 13通道
- 水平扫描角度: 540°
- 垂直扫描角度: 255°
- 颜 色 盘: 7色+白光
- 图 案 盘: 7款图案+白光
- 信号连接线: 3-pinXLR
- 尺 寸: 330x330x480mm
- 包装尺寸: 520x430x420mm
- 净 重: 11kg
- 毛 重: 12kg

- Voltage: AC90V~120V / 200V~240V50~60HZ
- Source: single60WLED
- Total power:150W
- Mode of operation: DMX512, voice-activated, self-propelled, master and slave
- Control channels:13 channels
- Horizontal scanning angle: 540°
- Vertical scanning angle: 255°
- The color wheel: 7 colors + white
- Gobo wheel: 7pattern + white
- Signal connection line:3-pinXLR
- Size: 33 x330x480mm
- Packing size:520x430x420mm
- Net Weight:11kg
- Gross/Weight:12kg



UB-A070



大功率 LED 54颗1W/3W防水帕灯  
High Power LED Par Waterproof (1W/3W X54)

技术参数/TECHNICAL PARAMETERS

- 电 压: AC90V~260V ,50Hz~60Hz
- 功 率: 400W
- 光束角度: 15°, 25° (可选)
- 通 道: 8通道
- 光 源: 120颗高亮度x3W LED (R:30, G:30, B:30, W:30)
- 控制选项: DMX, 自动触发
- 工作模式: 主从, 自走, 声控, DMX
- 尺 寸: 370x390x480mm
- 净 重: 7.5kg
- 毛 重: 8.5kg

- Voltage: AC90V~260V ,50Hz~60Hz
- Power: 400W
- Beam angle: 15° ,25° (optional)
- Channel: 8CH
- Light source: Intensive brightness 3W RGBW LED 120PCS (R:30,G:30, B:30,W:30)
- Control options:DMX, automatic trigger
- Work mode:Master-slave, since go, sonic, DMX
- Size: 370x390x480mm
- Net Weight: 7.5kg
- Gross/Weight: 8.5kg

UB-A073



LED72颗帕灯  
LED 72 Pcs Par Light

技术参数/TECHNICAL PARAMETERS

- 电 压: AC90V~260V ,50Hz~60Hz
- 功 率: 248W
- 光 源: 72颗高亮度x3W LED (红:18, 绿:18, 蓝:18, 白:18)
- 光束角度: 25°
- 通 道: 4/8通道
- 控 制: DMX, 自动触发
- 工作模式: 主从, 自走, 声控, DMX
- 尺 寸: 330x330x430mm
- 净 重: 3.5kg
- 毛 重: 15kg/4pcs

- Voltage:AC90V~260V ,50Hz~60Hz
- Power:248W
- Light source:Intensive brightness 3W RGBW LED 72PCS (R:18,G:18,B:18,W:18)
- Beam angle:25°
- Channel:4/8CH
- Control:DMX, Auto-trigger
- Work mode:Master,Slave,stand alone, sound
- Size:330x330x430mm
- Net Weight:3.5kg
- Gross/Weight:15kg/4pcs





## UB-A073



LED54颗防水帕灯

High Power LED Par Waterproof (1W/3W\*54)

### 技术参数/TECHNICAL PARAMETERS

- |                                                                   |                                                                                                                                                                                                                  |
|-------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| • 电 压: AC90V-260V ,50Hz-60Hz                                      | • Voltage: AC90V-260V ,50Hz-60Hz                                                                                                                                                                                 |
| • 功 率: 180W                                                       | • Power: 180W                                                                                                                                                                                                    |
| • 灯 泡: 54颗(R14/G14/B14/W12)3W LED                                 | • Bulb: 54PCS (R14/G14/B14/W12)3W LED                                                                                                                                                                            |
| • 防水等级: IP65                                                      | • Waterproof level: IP65                                                                                                                                                                                         |
| • 光束角度: 15° , 25° (可选)                                            | • Beam angle: 15° , 25° , (optional)                                                                                                                                                                             |
| • 通 道: 11通道                                                       | • Channel: 11CH                                                                                                                                                                                                  |
| • 特 点: 红绿蓝白混色/自走程序/频闪/调光/单机工作/DMX智能寻址/白平衡调节/线性非线性调光/智能温控保护/支持ID功能 | • Characteristics: red green blue white color mixing/program/strobe/light/single work/DMX intelligent addressable/white balance adjustment/linear dimming/intelligent temperature protection/ID support function |
| • 工作环境: 小型/大型室内外建筑/专业舞台工程                                         | • Work environment: Small / large indoor and outdoor architectural / professional stage engineering                                                                                                              |
| • 尺 寸: 330x232x290mm                                              | • Size: 330x232x290mm                                                                                                                                                                                            |
| • 净 重: 7.8kg                                                      | • Net Weight: 7.8kg                                                                                                                                                                                              |

## UB-A072



LED54颗帕灯

High power LED Par (1W/3W\*54)

### 技术参数/TECHNICAL PARAMETERS

- |                                                                   |                                                                                                                                                                                                           |
|-------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| • 电 压: AC90V-260V ,50Hz-60Hz                                      | • Voltage: AC90V-260V ,50Hz-60Hz                                                                                                                                                                          |
| • 功 率: 180W                                                       | • Power: 180W                                                                                                                                                                                             |
| • 光 源: 54颗(R14/G14/B14/W12)3W LED                                 | • Light source: 54PCS (R14/G14/B14/W12)3W LED                                                                                                                                                             |
| • 冷却系统: 内置对流散热                                                    | • Cooling system: built-in convection heat transfer                                                                                                                                                       |
| • 光束角度: 15° , 25° (可选)                                            | • Beam angle: 15° , 25° , (optional)                                                                                                                                                                      |
| • 通 道: 11通道                                                       | • Channels: 11CH                                                                                                                                                                                          |
| • 特 点: 红绿蓝白混色/自走程序/频闪/调光/单机工作/DMX智能寻址/白平衡调节/线性非线性调光/智能温控保护/支持ID功能 | • Features: Red green blue white color mixing/program/strobe/light/single work/DMX intelligent addressable/white balance adjustment/linear dimming/intelligent temperature protection/ID support function |
| • 工作环境: 小型/大型室内外建筑/专业舞台工程                                         | • Work environment: Small / large indoor and outdoor architectural / professional stage engineering                                                                                                       |
| • 尺 寸: 235 × 200 × 165mm                                          | • Size: 235x200x165mm                                                                                                                                                                                     |
| • 重 量: 4kg                                                        | • Weight: 4kg                                                                                                                                                                                             |

## UB-A005



大功率 LED 36颗帕灯(RGB)  
High Power RGB Par (1W/3W)

www.pro-led-lighting.com

### 技术参数/TECHNICAL PARAMETERS

- |                                |                                                                     |
|--------------------------------|---------------------------------------------------------------------|
| • 电 压: AC90V-260V ,50Hz-60Hz   | • Voltage: AC90V-260V ,50Hz-60Hz                                    |
| • 功 率: 50-180W                 | • Power: 50-180W                                                    |
| • 光 源: 36颗(R12/G12/B12)3W LED  | • Light source: 36PCS(R12/G12/B12)3W LED                            |
| • LED 角度: 15° , 25° , 35° (可选) | • LED angle: 15° , 25° , 35° , (optional)                           |
| • 灯泡寿命: 6-10万小时                | • Bulb life: 6-10 million                                           |
| • 颜 色: 1670万种颜色变化              | • Color: 1670million colors                                         |
| • 控 制: DMX512, 主从控制, 自走, 声控    | • Control: DMX512, master-slave control, automatic, voice-activated |
| • 通 道: 6通道                     | • Channel: 6CH                                                      |
| • 尺 寸: 250 × 250 × 3325mm      | • Size: 695 × 465 × 355mm                                           |
| • 重 量: 6.5kg                   | • Weight: 6.5kg                                                     |

## UB-A006



LED36颗帕灯(RGBW)  
HP LED Par 36x3W(RGBW)

## UB-A064



LED18颗X12W防水帕灯  
LED 18 PcsX12W Waterproof Par Light

## UB-A065



LED18颗X3W帕灯(四合一)  
LED 18 PcsX3W Par Light(4in1)

## UB-A066



LED7颗X4W帕灯(四合一)  
LED 7 PcsX4W Par Light(4in1)

### 技术参数/TECHNICAL PARAMETERS

- |                               |                                                                                                     |
|-------------------------------|-----------------------------------------------------------------------------------------------------|
| • 电 压: AC90V-260V ,50Hz-60Hz  | • Voltage: AC90V-260V ,50Hz-60Hz                                                                    |
| • 功 率: 120W                   | • Power: 120W                                                                                       |
| • 灯 泡: 36颗(R9/G9/B9/W9)3W LED | • Bulb: 36PCS (R9/G9/B9/W9)3W LED                                                                   |
| • 冷却系统: 内置对流散热                | • Cooling system: built-in convection heat transfer                                                 |
| • 光束角度: 15° , 25° (可选)        | • Beam angle: 15° , 25° , (optional)                                                                |
| • 通 道: 11通道                   | • Channel: 11CH                                                                                     |
| • 工作环境: 小型/大型室内外建筑/专业舞台工程     | • Work environment: Small / large indoor and outdoor architectural / professional stage engineering |
| • 尺 寸: 235 × 200 × 165mm      | • Size: 235x200x165mm                                                                               |
| • 重 量: 4kg                    | • Weight: 4kg                                                                                       |

### 技术参数/TECHNICAL PARAMETERS

- |                              |                                                         |
|------------------------------|---------------------------------------------------------|
| • 电 压: AC90V-260V ,50Hz-60Hz | • Voltage: AC90V-260V ,50Hz-60Hz                        |
| • 功 率: 186W/248W             | • Power: 186W/248W                                      |
| • 光束角度: 25°                  | • Beam angle: 15° , 25° , (optional)                    |
| • 通 道: 4/8通道                 | • Channel: 4/8CH                                        |
| • 光 源: 超亮4合一 18颗X12W LED     | • Light source: Intensive brightness 12W 4IN1 LED 18PCS |
| • 工作模式: 主从, 自走, 声控, DMX      | • Work mode: Master, Slave, stand alone, sound          |
| • 尺 寸: 330x330x430mm         | • Size: 330x330x430mm                                   |
| • 净 重: 3.5kg                 | • Net Weight: 3.5kg                                     |
| • 毛 重: 15kg/4pcs             | • Gross/Weight: 15Kg/4pcs                               |

### 技术参数/TECHNICAL PARAMETERS

- |                                              |                                                                           |
|----------------------------------------------|---------------------------------------------------------------------------|
| • 电 压: AC90V-260V ,50Hz-60Hz                 | • Voltage: AC90V-260V ,50Hz-60Hz                                          |
| • 功 率: 186W/248W                             | • Power: 186W/248W                                                        |
| • 光束角度: 15° , 25° (可选)                       | • Beam angle: 15° , 25° , (optional)                                      |
| • 通 道: 4/8通道                                 | • Channel: 4/8CH                                                          |
| • 光 源: 超亮3合一 18颗X9W LED<br>超亮4合一 18颗X12W LED | • Light source: Intensive brightness 9W 3IN1 LED 18PCS/12W 4IN1 LED 18PCS |
| • 工作模式: 主从, 自走, 声控, DMX                      | • Work modes: Master, Slave, stand alone, sound                           |
| • 尺 寸: 230x230x330mm                         | • Size: 230x230x330mm                                                     |
| • 净 重: 2.5kg/2.9kg                           | • Net Weight: 2.5kg/2.9kg                                                 |
| • 毛 重: 15kg/18kg/6pcs                        | • Gross/Weight: 15kg/18kg/6pcs                                            |

### 技术参数/TECHNICAL PARAMETERS

- |                              |                                                       |
|------------------------------|-------------------------------------------------------|
| • 电 压: AC90V-260V ,50Hz-60Hz | • Voltage: AC90V-260V ,50Hz-60Hz                      |
| • 功 率: 25W/33W               | • Power: 25W/33W                                      |
| • 光束角度: 25°                  | • Beam angle: 25°                                     |
| • 通 道: 4/8通道                 | • Channel: 4/8CH                                      |
| • 光 源: 超亮4合一 7颗X4W LED       | • Light source: Intensive brightness 4W 4IN1 LED 7PCS |
| • 工作模式: 主从, 自走, 声控, DMX      | • Work mode: Master, Slave, stand alone, sound        |
| • 尺 寸: 230x230x215mm         | • Size: 230x230x215mm                                 |
| • 毛 重: 2.15kg                | • Gross/Weight: 2.15kg                                |





UB-A024



18颗LED 洗墙灯  
LED wall washer (1W/3W\*18)

技术参数/TECHNICAL PARAMETERS

- |                             |                                       |
|-----------------------------|---------------------------------------|
| • 电压: AC90V-260V, 50Hz-60Hz | • Voltage: AC90V-260V, 50Hz-60Hz      |
| • 功率: 30W                   | • Power: 30W                          |
| • 光束角度: 25°                 | • Beam angle: 25°                     |
| • LED光源: 18颗1W(R6, G6, B6)  | • Light source: LED18 1W (R6, G6, B6) |
| • 防护等级: IP65                | • Protection grade: IP65              |
| • 尺寸: 1000x78x116mm         | • Size: 1000x78x116mm                 |
| • 重量: 2.5kg                 | • Weight: 2.5kg                       |

UB-A038



24颗LED 洗墙灯 RGB  
LED wall washer (1W/3W)

技术参数/TECHNICAL PARAMETERS

- |                             |                                      |
|-----------------------------|--------------------------------------|
| • 电压: AC90V-260V, 50Hz-60Hz | • Voltage: AC90V-260V, 50Hz-60Hz     |
| • 光源: 24颗 3W全彩LED           | • Light source: 24 3W full color LED |
| • 最大功率: 72W                 | • Maximum power: 72W                 |
| • 控制信号: DMX 512             | • The control signal: DMX 512        |
| • 通道: 5通道                   | • Channel: 5CH                       |
| • 防水等级: IP65                | • Waterproof grade: IP65             |
| • 尺寸: 1000x88x115mm         | • Size: 1000x88x115mm                |
| • 净重: 4.8kg                 | • Net Weight: 4.8kg                  |
| • 毛重: 5.2kg                 | • Gross/Weight: 5.2kg                |

UB-A012



36颗LED 洗墙灯RGB  
LED wall washer (1W/3W\*36)

技术参数/TECHNICAL PARAMETERS

- |                               |                                                                                  |
|-------------------------------|----------------------------------------------------------------------------------|
| • 电压: AC90V-260V, 50Hz-60Hz   | • Voltage: AC90V-260V, 50Hz-60Hz                                                 |
| • 功率: 60W                     | • Power rate: 60W                                                                |
| • 光束角度: 25°                   | • Beam angle: 25°                                                                |
| • LED光源: 36颗1W(R12, G12, B12) | • Light source: LED36 1W (R12, G12, B12)                                         |
| • 防护等级: IP65                  | • Protection grade: IP65                                                         |
| • 控制角度: DMX512/自动/声控/主从功能     | • Control Angle: DMX512 / automatic / sound / principal and subordinate function |
| • 尺寸: 1200x78x116mm           | • Size: 1200x78x116mm                                                            |
| • 净重: 5kg                     | • Net Weight: 5kg                                                                |

UB-A052



96颗LED 洗墙灯 1W RGB  
LED 96x1w RGB Wall washer

技术参数/TECHNICAL PARAMETERS

- |                                          |                                                                                                    |
|------------------------------------------|----------------------------------------------------------------------------------------------------|
| • 电压: AC90V-260V, 50Hz-60Hz              | • Voltage: AC90V-260V, 50Hz-60Hz                                                                   |
| • 光源: 96颗高亮1W LED(R24, G24, B24, W24)96W | • Light source: 96bright 1W LED (R24, G24, B24, W24)96W                                            |
| • 功率: 120W                               | • Power: 120W                                                                                      |
| • 通道: 8CH(数码显示)                          | • Channel: Channel 8( digital display )                                                            |
| • 控制模式: DMX、声控、自走、键盘自锁、主/从联机             | • Control mode: DMX, voice-activated, self-propelled, keyboard self-locking, master / slave Online |
| • 防水等级: IP65                             | • Waterproof grade: IP65                                                                           |



UB-A065



LED 水晶魔球  
LED Crystal Magic Ball

技术参数/TECHNICAL PARAMETERS

- |                                                              |                                                                                                                      |
|--------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|
| • 电压: AC90V-260V, 50Hz-60Hz                                  | • Voltage: AC90V-260V, 50Hz-60Hz                                                                                     |
| • 光源: 1颗9W LED RGB 高亮全彩                                      | • Light source: 1x9W RGB LED                                                                                         |
| • 功率: 20W                                                    | • Power: 20W                                                                                                         |
| • 通道: 6通道                                                    | • Channel: 6CH                                                                                                       |
| • 显示: LED数码管显示                                               | • shows: LED digital screen                                                                                          |
| • 尺寸: 340x300x295mm                                          | • Size: 340x300x295mm                                                                                                |
| • 净重: 3.2kg                                                  | • Net Weight: 3.2kg                                                                                                  |
| • 毛重: 4kg                                                    | • Gross/Weight: 4kg                                                                                                  |
| • DMX功能: CH1 白光频闪 CH2 红色调光 CH3 绿色调光 CH4 蓝色调光 CH5 花式速度 CH6 自走 | • DMX Features: CH1 PAN in positive CH2 RED dimming CH3 GREEN dimming CH4 BLUE dimming CH5 Fancy LED CH6 Fancy Speed |

UB-A016



LED 地板砖  
LED Dance Floor

技术参数/TECHNICAL PARAMETERS

- |                               |                                                             |
|-------------------------------|-------------------------------------------------------------|
| • 电压: AC90V-260V, 50Hz-60Hz   | • Voltage: AC90V-260V, 50Hz-60Hz                            |
| • 保险丝: T3.15A                 | • Fuse: T3.15A                                              |
| • 颜色: R, G, B 加混色             | • color: R, G, B Additive Color Mixing                      |
| • 光源: 5mm LED 552/840pcs      | • Light source: 5mm LED 552/840PCS                          |
| • 面板: 12mm厚亚克力板, 每块可承受800公斤重量 | • Panel: 12mm Acrylic, supports up to 800 kgper unit        |
| • 底部: 1.5mm厚钢板一次成型钢模槽         | • Bottom: 1.5mm armor plate                                 |
| • 冷却系统: 对流冷却无风扇               | • Cooling system: Convection Cooling No Fans                |
| • 控制: DMX512, 单机, 主从, 自走, 声控  | • Control: DMX512, single master and slave, since go, sonic |
| • 通道: 28CH                    | • Channel: 28 DMX Channel                                   |
| • 尺寸: 1000x1000x100mm         | • Dimensions: 1000x1000x100mm                               |
| • 重量: 40kg                    | • Weight: 40kg                                              |



### UB-A004



LED 频闪灯  
LED Strobe

#### 技术参数/TECHNICAL PARAMETERS

|                                                                                                                                                                                   |                                                    |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|
| 电 源: AC110-230V, 50/60Hz                                                                                                                                                          | • Voltage: AC110V/230V 50/60Hz                     |
| 灯 珠: 198个高亮度的 10mm LED                                                                                                                                                            | • Light beads: 198 pcs 10mm LED                    |
| 控 制: 可声控, 主/从 同步。频闪功能                                                                                                                                                             | • DMX Channels: 6CH                                |
| 通 道: 6通道                                                                                                                                                                          | • 4 run model: auto, DMX, sound, strobe, in series |
| 功 率: 36W                                                                                                                                                                          | • Power: 36W                                       |
| 包装尺寸: 450 x 255 x 230mm                                                                                                                                                           | • Packing size: 450 x 255 x 230mm                  |
| 这种产品有多种功能, 耗电少, 寿命长, 可以无间断使用, 安全性高等特点, 非常适合中小型包房, 酒吧                                                                                                                              |                                                    |
| • This product has a variety of functions; less power consumption, long life, can be continuous use, safety higher characteristic, very suitable for middle and small rooms, bars |                                                    |

### UB-A007S



LED 四眼观众灯  
HP Blinder 4

#### 技术参数/TECHNICAL PARAMETERS

|                            |                                                                                      |
|----------------------------|--------------------------------------------------------------------------------------|
| 电 压: AC90V-260V, 50Hz-60Hz | • Voltage: AC90V-260V, 50Hz-60Hz                                                     |
| 功 率: 50W                   | • Power: 50W                                                                         |
| 光 源: 4 x 12W(RGBW) LED     | • Light source: 4 x 12W ( RGBW ) LED                                                 |
| 功 能: DMX512信号控制, 声控, 主附机控制 | • Power: DMX512 signal control, voice-activated, attached to the main engine control |
| 通 道: 6通道                   | • Channel: 6CH                                                                       |
| 尺 寸: 306x306x109mm         | • Size: 306x306x109mm                                                                |
| 重 量: 4kg                   | • Weight: 4kg                                                                        |

### UB-A007



大功率 4 眼观众灯(1W/3W)  
LED blinder 4 HP (1W/3W\*48)

#### 技术参数/TECHNICAL PARAMETERS

|                             |                                                                                       |
|-----------------------------|---------------------------------------------------------------------------------------|
| 电 压: AC90V-260V, 50Hz-60Hz  | • Voltage: AC90V-260V, 50Hz-60Hz                                                      |
| 功 率: 60W/150W               | • Power: 60W/150W                                                                     |
| 光 源: 48颗 1W/3W 超亮灯珠         | • Light source: 48 1W/3W super bright LED lamp                                        |
| 控 制: DMX512声控/自控/单控/户控/主从模式 | • Control: DMX512/ voice / control / control / The user control / Master / slave mode |
| 光束角度: 30°                   | • Beam angle: 30 degrees                                                              |
| 功 能: 投光, 频闪, 换色, 折光, 声控     | • Function: light, strobe, change color, refractive index, voice                      |
| 颜色效果: 红绿蓝能混合成256色           | • Effect of color: RGB can be mixed into the 256 color                                |
| 通 道: 8通道                    | • Channel: 8CH                                                                        |
| 尺 寸: 480x460x230mm          | • Size: 480x460x230mm                                                                 |
| 净 重: 7kg                    | • Net weight: 7kg                                                                     |

### UB-A009



LED 8眼观众灯 (1W/3W)  
LED Blinder 8 HP (1W/3W\*96)

#### 技术参数/TECHNICAL PARAMETERS

|                             |                                                         |
|-----------------------------|---------------------------------------------------------|
| 电 压: AC90V-260V, 50Hz-60Hz  | • Voltage: AC90V-260V, 50Hz-60Hz                        |
| 光 源: 96颗 超亮 LED 1W/3W       | • Power: 100W/300W                                      |
| 功 率: 100W/300W              | • Light source: High-bright LED 1W/3W                   |
| 灯 珠: 红: 32颗, 绿: 32颗, 蓝: 32颗 | • Specification: R:32, G:32, B:32                       |
| 信 号: DMX512/声控/自走           | • Control signal: DMX512/sound/auto mode                |
| 模 式: 自走/声控/主从               | • Control mode: Single control /sound/master-slave      |
| 通 道: 6通道                    | • Channel: 6CH                                          |
| 功 能: 混色, 频闪, 换色, 光影, 声控     | • Features: Dimmer, strobe, change color, shadow, sound |
| 颜色: 红绿蓝可以混合出256种颜色          | • Color effect: 3 basic colors Can mixed 256 colors     |
| 尺 寸: 855x455x116mm          | • Size: 855x455x116mm                                   |
| 重 量: 9.1kg                  | • Weight: 9.1kg                                         |

### UB-A031



LED 双头月亮灯  
LED Double Moon Flower

#### 技术参数/TECHNICAL PARAMETERS

|                                                      |                                               |
|------------------------------------------------------|-----------------------------------------------|
| 电 源: AC120-230V, 50/60Hz                             | • Voltage: AC120V/230V 50/60Hz                |
| 功 率: 30W                                             | • Power: 30W                                  |
| 16种不同的图案, 可频闪, 图案可调3个通道, 可声控, 主/从动功能                 | • Gobo rotation via LED matrix                |
| 这种产品有多种功能, 耗电少, 寿命长, 可以无间断使用, 安全性高等特点, 非常适合中小型包房, 酒吧 | • Strobe-effect with adjustable speed         |
| • 尺 寸: 375X345X210mm                                 | • Equipped with 96LED: 48red, 24blue, 24green |
| • 净 重: 2.7kg                                         | • 100000 hours LED life                       |
|                                                      | • Size: 375X345X210mm                         |
|                                                      | • Net weight: 2.7kg                           |

### UB-A022



LED 七眼扇形灯  
LED Seven Head Effect Light

#### 技术参数/TECHNICAL PARAMETERS

|                                             |                                                              |
|---------------------------------------------|--------------------------------------------------------------|
| 电 源: AC100-220V, 50/60Hz                    | • Voltage: AC100V/220V 50/60Hz                               |
| 光 源: 294颗高亮度 5LED, 红84, 绿42, 兰84, 白84四种颜色变换 | • Power: 50W                                                 |
| 控 制: DMX控制, 主从机模式, 自动模式, 声控模式(可调节声控灵敏度)     | • Channel: 10CH                                              |
| 功 率: 50W                                    | • LED Quantity: 294 PCS 5MM LED (R: 84, G: 42, B: 84, W: 84) |
| 通 道: 10 DMX通道                               | • Body color: Black                                          |
| 尺 寸: 630X320X170mm                          | • Size: 630X320X170mm                                        |
| 净 重: 5.5kg                                  | • Net weight: 5.5kg                                          |

### UB-A022



LED 四眼观众灯(条形)  
Four Head High Power Color Changer

#### 技术参数/TECHNICAL PARAMETERS

|                                             |                                                                          |
|---------------------------------------------|--------------------------------------------------------------------------|
| 电 源: AC110-240V, 50/60Hz                    | • Voltage: AC100V/220V 50/60Hz                                           |
| 光 源: 48颗 1W/3W 超亮灯珠                         | • Power: 60W/150W                                                        |
| 功 率: 60W/150W                               | • Lamp: 1W/3W LED 48(R12, G12, B12, W12)                                 |
| 控制信号: DMX512/声控/自控                          | • Control: DMX512, Sound active and Auto-run                             |
| 控制模式: 单控/户控/主从模式                            | • Channel: 8CH                                                           |
| 通 道: 8 DMX通道                                | • Beam angle: 30°                                                        |
| 光束角度: 30度                                   | • Function: dimmer, strobe, glide change, shadow, sound active           |
| 功 能: 投, 频闪, 换色, 折光, 声控                      | • Color effect: RGBW, tricolor + white, can mix billions kind of colors. |
| 颜色效果: 红绿蓝白, 三基色+白光补充, 能混合256x256x256x256种颜色 | • Four head can synchronous also can work separate                       |
| 功 能: 四头可同步, 也可单独运行                          | • Size: 658X173X190mm                                                    |
| 尺 寸: 658X173X190mm                          | • Net weight: 5.7kg                                                      |
| 净 重: 5.7kg                                  | • Net weight: 5.7kg                                                      |

### UB-A022



LED 三爪鱼  
LED Three Claw Light

#### 技术参数/TECHNICAL PARAMETERS

|                                         |                                                                 |
|-----------------------------------------|-----------------------------------------------------------------|
| 电 源: AC100-220V, 50/60Hz                | • Voltage: AC100V/220V 50/60Hz                                  |
| 光 源: 63颗高亮度 5LED, 红21, 绿21, 兰21         | • 4 operation modes: DMX, Auto Run, Sound active and Slave mode |
| 控 制: DMX控制, 主从机模式, 自动模式, 声控模式(可调节声控灵敏度) | • Built-in programmes can be triggered via built-in microphone  |
| 功 率: 30W                                | • Robust metal housing                                          |
| 通 道: 7 DMX通道                            | • Power: 30W                                                    |
| 显 示: 数码                                 | • Channel: 7CH                                                  |
| 尺 寸: 420X370X215mm                      | • Size: 420X370X215mm                                           |
| 净 重: 4.5kg                              | • Net weight: 4.5kg                                             |
| 毛 重: 5.5kg                              |                                                                 |



## UB-K008



**3KW烟机**  
3000W DMX FOG Machine

### 技术参数/TECHNICAL PARAMETERS

|                               |                                                         |
|-------------------------------|---------------------------------------------------------|
| • 电 压: AC110-220V, 50/60Hz    | • Voltage: AC110-220V, 50/60Hz                          |
| • 功 率: 3000W                  | • Power rate: 3000W                                     |
| • 预热时间: 12分钟                  | • Preheating time: 12 minutes                           |
| • 喷 烟 量: 6L                   | • Smoke amount: 6L                                      |
| • 射 程: 20M                    | • Shooting range: 20M                                   |
| • 输 出: 40000cu. ft/min DMX512 | • Transmission: 40000cu. ft / min DMX512                |
| • 控 制: DMX512遥控, 遥控控制         | • Control system: DMX512 remote control, remote control |
| • 尺 寸: 830x310x180mm          | • Size: 830x310x180mm                                   |
| • 重 量: 20kg                   | • Weight: 20kg                                          |

## UB-K004



**1500W 烟机**  
1500W Machine

### 技术参数/TECHNICAL PARAMETERS

|                            |                                           |
|----------------------------|-------------------------------------------|
| • 电 压: AC110-220V, 50/60Hz | • Voltage: AC110-220V, 50/60Hz            |
| • 功 率: 1500W               | • Power rate: 1500W                       |
| • 预热时间: 8分钟                | • Preheating time: 8 minutes              |
| • 烟油容量: 3公升                | • Oil capacity: 3 liter                   |
| • 吸烟距离: 12米                | • Smoke spray distance: 12 meters         |
| • 烟雾覆盖: 20000cu. ft/min    | • Smoke: 20000cu. ft / min                |
| • 控 制: 遥控/线控               | • Control system: remote / remote control |
| • 尺 寸: 465x225x195mm       | • Size: 465x225x195mm                     |
| • 重 量: 6kg                 | • Weight: 6kg                             |

## UB-K007



**1500W地烟机**  
1500W Icelow FOG Machine

### 技术参数/TECHNICAL PARAMETERS

|                            |                                         |
|----------------------------|-----------------------------------------|
| • 电 压: AC110-220V, 50/60Hz | • Voltage: AC110-220V, 50/60Hz          |
| • 功 率: 1500W               | • Power rate: 1500W                     |
| • 预热时间: 10分钟               | • Preheating time: 10 minutes           |
| • 控 制: DMX512控制/线控         | • Control system: DMX512 control / wire |
| • 喷 烟 量: 40000cu. ft/rain  | • Smoke amount: 40000cu. ft / rain      |
| • 油桶容量: 5.5公升              | • Tank capacity: 5.5L                   |
| • 覆盖面积: 80平方               | • Area: 80 square                       |
| • 尺 寸: 760 x 410 x 380mm   | • Size: 760x410x380mm                   |
| • 重 量: 25kg                | • Weight: 25kg                          |

## UB-M009



**1500W雪花机**  
Snow Machine

### 技术参数/TECHNICAL PARAMETERS

|                            |                                         |
|----------------------------|-----------------------------------------|
| • 电 压: AC110-220V, 50/60Hz | • Voltage: AC110-220V, 50/60Hz          |
| • 功 率: 1500W               | • Power rate: 1500W                     |
| • 控 制: DMX512控制/线控         | • Control system: DMX512 control / wire |
| • 油桶容量: 5公升                | • Tank capacity: 5L                     |
| • 覆盖面积: 50平方               | • Area: 50 square                       |
| • 颜 色: 闪光银色                | • Color color: flash silver             |
| • 尺 寸: 515 x 260 x 230mm   | • Size: 515x260x230mm                   |
| • 净 重: 9.8kg               | • Net Weight: 9.8kg                     |
| • 毛 重: 10.5kg              | • Gross Weight: 10.5kg                  |

## UB-E001



**500MW单绿激光**  
500MW Single Green Lasers

### 技术参数/TECHNICAL PARAMETERS

|                                   |                                                                      |
|-----------------------------------|----------------------------------------------------------------------|
| • 电 压: AC100-250V, 50/60Hz        | • Voltage: AC100V-250V, 50/60HZ                                      |
| • 功 率: 绿色500MW                    | • Laser power: Green 500mW                                           |
| • 激光颜色: 绿色, 白色                    | • Laser color: green, white                                          |
| • 波 长: 绿色532nm                    | • Wave Length: Green 532nm,                                          |
| • 运行模式: 声控, 自走, DMX512            | • Operating modes: sound, auto, DMX512                               |
| • 激光图案: 超过64种激光图案                 | • Laser design: more than 64 kinds of laser patterns                 |
| • 扫描系统: 采用精密步进电机, 大角度扫描           | • Scanning System: Using precision stepper motor, big angle scanning |
| • 应用场所: 迪厅、舞厅、酒吧、KTV包厢、家庭Party... | Applied in family party, DJ room, KTV, etc                           |
| • 尺 寸: 370x270x185mm              | • Size: 370x270x185mm                                                |
| • 重 量: 3.3kg                      | • Weight: 3.3 Kg                                                     |

## UB-E006



**4头红绿扫描激光**  
Double Red & Green Laser

### 技术参数/TECHNICAL PARAMETERS

|                                           |                                                       |
|-------------------------------------------|-------------------------------------------------------|
| • 电 压: AC110-220V, 50/60Hz, 60W           | • Voltage: AC100V-250V, 50/60HZ, 60W                  |
| • 特 点: 双红双绿四头激光, 四头光束组合效果。一机四种模式, 内置百余种图案 | • Laser power: Red 100mw x 2 + Green 30mw x 2         |
| • 扫描系统: 采用精密步进电机, 大角度扫描                   | • Laser Color: green and red                          |
| • 波 长: 绿光532nm, 红光650nm                   | • Wave length: Green 532nm, Red 650nm                 |
| • 激 光 器: 绿光2x30+红光2x100W                  | • Play Mode: Sound active, Auto, DMX512, Master/Slave |
| • 控制模式: DMX512、声控、自动、主从同步                 | • Laser Pattern: more than 128 laser patterns         |
| • DMX功能: 七通道控制, 具黑场功能                     | • Scanner: N1.8 high precision stepper motor          |
| • 控制接口: 三芯线接口/XLR                         | • Applied in family party, DJ room, KTV, etc          |
| • 应用场所: 迪厅、舞厅、酒吧、KTV包厢、家庭Party...         | • Size: 560x260x160mm                                 |
| • 尺 寸: 560x260x160mm                      | • Weight: 6kg                                         |
| • 重 量: 6kg                                |                                                       |

## UB-E009



**1W 单绿动画激光**  
1W Green cartoon laser

### 技术参数/TECHNICAL PARAMETERS

|                                             |                                                      |
|---------------------------------------------|------------------------------------------------------|
| • 电 压: AC110-220V, 50/60Hz, 50W             | • Voltage: AC110-220V, 50/60Hz, 50W                  |
| • 扫描系统: 高速振镜, 大角度扫描                         | • Laser power: Green 2000mW                          |
| • 激 光 器: 1W (532nm) 温控                      | • Laser Color: green                                 |
| • 控制模式: DMX512、声控、自动光束、自动动画、主从同步、PC控制       | • Wave length: Green 532nm                           |
| • DMX功能: 十二通道控制, 具黑场功能                      | • Play Mode: Sound active, Auto, DMX512, ILDA PC     |
| • 电脑接口: 兼容ILDA标准电脑激光表演软件控制。ILDA的全信号采用电子开关转换 | • Laser Pattern: more than 128 patterns and effects. |
| • 应用场所: 迪厅、舞厅、酒吧、夜总会及各种大型表演场地               | • Scanner: high speed scanner 20K                    |
| • 尺 寸: 760x450x305mm                        | • Applied in family party, DJ room, KTV, etc         |
| • 重 量: 12kg                                 | • Dimension: 760x450x305mm                           |
|                                             | • Weight: 12kg                                       |

## UB-E008



**1W全彩激光**  
1W RGB full color laser show

### 技术参数/TECHNICAL PARAMETERS

|                                             |                                                      |
|---------------------------------------------|------------------------------------------------------|
| • 电 压: AC110-220V, 50/60Hz, 50W             | • Voltage: AC90V-250V, 50/60HZ, 50W                  |
| • 扫描系统: 高速振镜, 大角度扫描                         | • Laser power: Full color 2000mW                     |
| • 激 光 器: 全彩1W (532nm) 温控                    | • Laser Color: Full color                            |
| • 控制模式: DMX512、声控、自动光束、自动动画、主从同步、PC控制       | • Wave length: Green 532nm                           |
| • DMX功能: 十二通道控制, 具黑场功能                      | • Play Mode: Sound active, Auto, DMX512, ILDA PC     |
| • 电脑接口: 兼容ILDA标准电脑激光表演软件控制。ILDA的全信号采用电子开关转换 | • Laser Pattern: more than 128 patterns and effects. |
| • 应用场所: 迪厅、舞厅、酒吧、夜总会及各种大型表演场地               | • Scanner: high speed scanner 20K                    |
| • 尺 寸: 760x450x305mm                        | • Applied in family party, DJ room, KTV, etc         |
| • 重 量: 12kg                                 | • Dimension: 760x450x305mm                           |
|                                             | • Weight: 12kg                                       |



## UB-C004



240电脑灯控台  
240CH DMX Controller

### 技术参数/TECHNICAL PARAMETERS

- 240条DMX通道
- 有30个BANK,每个BANK有8个可编程的SCENES
- 有MIDI接口,可随时用MIDI信号控制,LED显示
- BLACKOUT功能可用手动或MIDI作遥控
- CHASES编程和CHASES运行功能,可用手动或MIDI遥控控制
- 输出延时功能,用FADE TIME电位器调节延时时间
- 可叠加运行6个CHASES
- 可任意设置通道运行程序可按编程键暂停程序运行
- 翻页键可将AB页叠加使用
- 供电电压: DC9V-12V
- 内箱尺寸: 580 × 380 × 135mm
- Voltage: DC9V-12V
- Current: > 300mA
- 240 DMX channels
- 30 Banks, one Bank can programme 8 scenes
- MIDI signal control, LED show.
- MIDI control Blackout, Chases Programme and Chases run.
- CHASES programme and run can MID control.
- Can run 6 chases at the same time.
- Dimensions: 580 × 380 × 135mm

## UB-C005



阳光512控台  
Sunny 512 Controller

### 技术参数/TECHNICAL PARAMETERS

- DMX512/1990标准512 DMX控制通道
- 可控制32台16通道电脑灯
- 带背光的大屏幕LCD显示运行参数
- 16个通道推杆, 1个速度控制推杆
- 1600个走灯程序步储存容量,48个走灯程序,每程序最多100步;每步速度、渐变参数独立设置
- 可选音乐同步或手动速率控制
- 可同时运行4个走灯程序、48个场景,并可同时对32台电脑灯进行提灯操作。
- 不同种类电脑灯的X/Y由穿梭轮统一控制
- 16Bit电脑灯X/Y控制精度
- 15个环境程序,快速调用不同的场景、走灯、手动运行(提灯)组合
- 电 源: AC 90-250V 50-60Hz
- 体 积: 680x580x150mm
- 重 量: 8kg
- Voltage: AC 90-250V 50-60Hz
- DMX512/1990 Standard 512 DMX Control channel
- Control 32 computer lights of 16 channel
- 16 channel push rod, 1 Speed push rod
- 1600 run program of light capacity, 48 run program of light, 100 steps per program only
- Could run 4 program and 48 scenes of light at same time. Control 32 computer light via instruction
- Different Pan&Tilt of computer light are controlled by shuttle wheel
- 16 Bit Computer Light Pan or Tilt control precise
- 15 environment program, run different scene fastly, handle run program combinationed
- Dimensions: 680x580x150mm
- Weight: 8kg

## UB-M009



珍珠控台  
204 8CH DMX Snow Machine  
(2010 NEW Version)

### 技术参数/TECHNICAL PARAMETERS

- 电 压: AC110-220V, 50/60Hz
- 60个预设推杆Swop/Flash/Fixture按钮
- 屏幕上的拾色器方便即时创建颜色
- 内置硬盘, Show文档可以自动存储和备份
- 内置CD/DVD读写机, 和USB接口
- 4个完整的独立保护的DMX单元
- 标准键盘和鼠标板, 与控制台绘图器匹配
- 全集成灯库超过1500灯具文档
- 尺 寸: 765 × 615 × 160mm
- 包装尺寸: 840 × 670 × 270mm
- 净 重: 26kg
- 毛 重: 44kg
- Voltage: AC110-220V, 50/60Hz
- The 0 preset push rod Swop / Flash / Fixture button
- Screen color picker instant create color
- Internal hard disk, Show document can be automatic storage and backup
- Built-in CD / DVD machines to read and write, and USB interface
- 4 complete independent DMX protection unit
- The standard keyboard and mouse pad, and console plotter matching
- Integrated lamp base lamp over 1500 documents
- Size: 765x615x160mm
- Packing size: 840x670x270mm
- Net Weight: 26kg
- Gross Weight: 44kg



户外灯 Outdoor Lights/Lamps

支架 Stand

### 灯钩 Light Hook/Clamp



1

2

3

4

5

6

7

8

9



雪花油

5L泡泡油

5L阿波罗烟油

4.5LDJ王烟油

1L 西德烟油

5L 西德烟油

### 航空箱 Flight Case



1

2

3

4

色纸 Color Paper/Filter



玻璃球  
Union Bright Color Mirror Ball

玻璃球 Mirror Ball

①

②

③



10A对插

40A对插

筒灯 Par can

筒灯 Par can

喷火油  
Fire Oil

喷火油  
fire Oil