



BRANDO TECHNOLOGY CO.,LTD

' Keep Your Employee Safe With BRANDO - Cap Lamp'



KL12LM Corded Cap Lamp



Light source	1pcs main light and 2pcs auxiliary lights
Battery capacity	10.4Ah
Rated Voltage	3.7V
Main light current (strong light)	800mA
Main light current (working light)	450mA
Power of the main light (strong light)	2.4W
Power of the main light (working light)	1.4W
Illuminous(strong light)	334LUM
Illuminous(working light)	195LUM
Brightness of the main light (strong light)	25000lux
Brightness of the main light (working light)	15000lux
Life span for main LED	100000hours
Battery cycles	1200 cycles
Working time (Strong Light)	13 hours
Working time (working light)	22 hours
4 Levels light	working light- strong light- auxiliary lights-SOS
Weight	650g
Water-proof grade	IP68



KL5LM-A Corded Cap Lamp



Light source	1pcs main light and 6 auxiliary lights
Battery capacity	6.6Ah
Rated Voltage	3.7V
Main light current	300mA
Power of the main light	0.9W
Illuminous	125LUM
Brightness of the main light	4000lux
Life span for main LED	100000hours
Battery cycles	1200 cycles
Working time	22 hours
Cable length	1.5m Or 1.65m
Weight	472g
Water-proof grade	IP67



KL5LM-B Corded Cap Lamp



Light source	1pcs main light and 6pcs auxiliary lights
Battery capacity	6.6Ah
Rated Voltage	3.7V
Main light current	350mA
Power of the main light	1.05W
Illuminous	146LUM
Brightness of the main light	10000lux
Life span for main LED	100000hours
Battery cycles	1200 cycles
Working time	18 hours
Cable length	1.4m Or 1.65m
Weight	478g
Water-proof grade	IP67




KL5LM-C Corded Cap Lamp



Light source	1pcs main light and 2pcs auxiliary lights
Battery capacity	6.6Ah
Rated Voltage	3.7V
Main light current	350mA
Power of the main light	1.05W
Illuminous	146LUM
Brightness of the main light	12000lux
Life span for main LED	100000hours
Battery cycles	1200 cycles
Working time	18 hours
Cable length	1.4m Or 1.65m
Weight	490g
Water-proof grade	IP67



KL7LM-A Corded Cap Lamp

	Light source	1pcs main light and 6pcs auxiliary lights
	Battery capacity	6.6Ah
	Rated Voltage	3.7V
	Main light current	300mA
	Power of the main light	0.9W
	Illuminous	125LUM
	Brightness of the main light	4000lux
	Life span for main LED	100000hours
	Battery cycles	1200 cycles
	Working time	22 hours
	Cable length	1.4m Or 1.65m
	Weight	560g
	Water-proof grade	IP67




KL7LM-B Corded Cap Lamp



Light source	1pcs main light and 6pcs auxiliary lights
Battery capacity	6.6Ah
Rated Voltage	3.7V
Main light current	350mA
Power of the main light	1.05W
Illuminous	146LUM
Brightness of the main light	10000lux
Life span for main LED	100000hours
Battery cycles	1200 cycles
Working time	18 hours
Cable length	1.4m Or 1.65m
Weight	560g
Water-proof grade	IP67



KL7LM-C Corded Cap Lamp

	Light source	1pcs main light and 2pcs auxiliary lights
	Battery capacity	6.6Ah
	Rated Voltage	3.7V
	Main light current	400mA
	Power of the main light	1.2W
	Illuminous	167LUM
	Brightness of the main light	15000lux
	Life span for main LED	100000hours
	Battery cycles	1200 cycles
	Working time	16 hours
	Cable length	1.4m 0r 1.65m
	Weight	569g
	Water-proof grade	IP67



KL8LM Corded Cap Lamp



Light source	1pcs main light and 2pcs auxiliary lights
Battery capacity	7.8Ah
Rated Voltage	3.7V
Main light current	550mA
Power of the main light	1.65W
Illuminous	230LUM
Brightness of the main light	15000lux
Life span for main LED	100000hours
Battery cycles	1200 cycles
Working time	15 hours
Cable length	1.4m 0r 1.65m
Weight	550g
Water-proof grade	IP67



KL11LM Hunting Light



Light source	1pcs main light and 4pcs auxiliary lights
Battery capacity	11.2Ah
Rated Voltage	3.7V
Main light current	600mA
Power of the main light	1.8W
Illuminous	250LUM
Brightness of the main light	30000lux
Life span for main LED	100000hours
Battery cycles	1200 cycles
Working time	18 hours
Cable length	1.4m Or 1.65m
Weight	722g
Water-proof grade	IP67



KL6-C Cordless Cap Lamp



Light source	1pcs main light and 2pcs auxiliary lights
Battery capacity	6.2Ah
Rated Voltage	3.7V
Main light current	300mA
Power of the main light	0.9W
Illuminous	125LUM
Brightness of the main light	13000lux
Life span for main LED	100000hours
Battery cycles	1200 cycles
Working time	20 hours
3 Levels Light	Strong light- auxiliary lights- SOS
Weight	210g
Water-proof grade	IP68



- * Charged full with 4 hours 16 hours working time for option is to meet the demand of longer working time in the underground
- * Super bright of 13000 lux in 1 meter, more 15hrs working time
- * Explosion-proof and Anti-impact, which widely used in the mining, Oil & gas, Rescue, outdoor lighting, etc
- * Unique to the cordless model is a back-lit display screen with battery life indication, providing clear warning when recharge is required.
- * USB charger or Cradles for optional. Charger rack no problem.
- * OLED display with date, battery capacity, company information and series No.
- * Green or Transparent are available

KL2.5LM-A Cordless Cap Lamp



Light source	1pcs main light and 6pcs auxiliary lights
Battery capacity	2.8Ah
Rated Voltage	3.7V
Main light current	230mA
Power of the main light	0.69W
Illuminous	96LUM
Brightness of the main light	3500lux
Life span for main LED	100000hours
Battery cycles	1200 cycles
Working time	13 hours
Weight	128g
Water-proof grade	IP65



KL2.5LM-B Cordless Cap Lamp




Light source	1pcs main light
Battery capacity	2.8Ah
Rated Voltage	3.7V
Main light current	500mA
Power of the main light	1.5W
Illuminous	210LUM
Brightness of the main light	10000lux
Life span for main LED	100000hours
Battery cycles	1200 cycles
Working time	6 hours
Weight	152g
Water-proof grade	IP65



KL2.5LM-C Cordless Cap Lamp



Light source	1pcs main light and 6pcs auxiliary lights
Battery capacity	3.8Ah
Rated Voltage	3.7V
Main light current	230mA
Power of the main light	0.69W
Illuminous	96LUM
Brightness of the main light	7000lux
Life span for main LED	100000hours
Battery cycles	1200 cycles
Working time	13 hours
Weight	158g
Water-proof grade	IP67

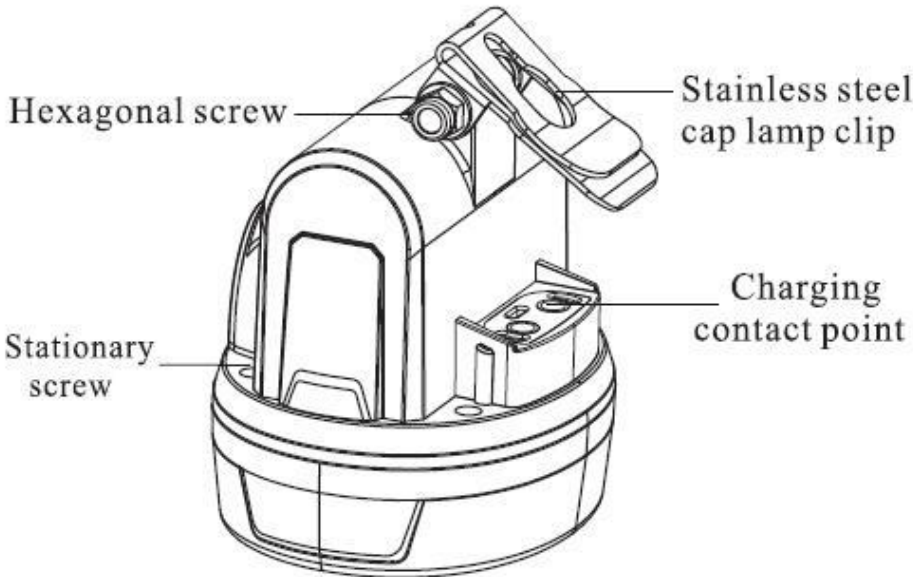

KL4.5LM Cordless Cap Lamp



Light source	1pcs main light and 6pcs auxiliary lights
Battery capacity	4.5Ah
Rated Voltage	3.7V
Main light current	300mA
Power of the main light	0.9W
Illuminous	125LUM
Brightness of the main light	4000lux
Life span for main LED	100000hours
Battery cycles	1200 cycles
Working time	15 hours
Weight	234g
Water-proof grade	IP65



BO-2000 Cordless Cap Lamp



Light source	1pcs main light and 6pcs auxiliary lights
Battery capacity	2.2Ah
Rated Voltage	3.7V
Main light current	200mA
Power of the main light	0.6W
Illuminous	85LUM
Brightness of the main light	4000lux
Life span for main LED	100000hours
Battery cycles	1200 cycles
Working time	11 hours
Weight	171g
Water-proof grade	IP67



Anti-explosive Cordless Cap Lamp KL6-C



www.szbrando.com

Brando focus on LED Industrial Lights, Such as LED miner cap lamp, LED explosion-proof troch, LED explosion-proof headlamp and Safety Lockout for more than 10 years.

The main service we do is CUSTOMIZED, Brando according to customer's request to design new items to meet client's market positioning and use condition.

Strong ID Team, Rich Experience Electronic Circuit Team, Professional MD Team, Outstanding Optical Design Team to design the product what clients needs, Brando cooperating with many clients with customized service around the world for different products, we manufacture best quality products by having a company culture of continuous improvement in the quality of our end products and services to our customers. Using such a focus for quality and customer, Brando has been constantly building a solid reputation among its worldwide customers for offering innovation, high quality and excellent reliable delivery services.

Our products are being used across industries for applications such as: Mining Installations, Tunnel Projects, Police, Shipyard, Railway Construction, Public Security, Oil Field Installations, Steel, Night-Power Communication, Camping, Hunting etc.

BRANDO TECHNOLOGY CO.,LTD

Add: No 22-6, Yuan Xin Rd Tong Le Village, Long Gang District, Shen Zhen City, China.

Tel: +86-755-84826289

Mob: +86-13925272265

E-mail: sales@szbrando.com

Website: www.szbrando.com