



3A PIPE FITTING

90° Short Elbow 2WCL




SIZE	D	L	T
1.0"	25.4	38.1	1.65
1.5"	38.1	57.20	1.65
2.0"	50.8	76.20	1.65
2.5"	63.5	95.25	1.65
3.0"	76.2	114.30	1.65
4.0"	101.6	152.40	2.10

90° Long Elbow L2S




SIZE	D	L	T
1.0"	25.4	52.4	1.65
1.5"	38.1	74.6	1.65
2.0"	50.8	103.2	1.65
2.5"	63.5	131.8	1.65
3.0"	76.2	160.3	1.65
4.0"	101.6	211.1	2.10

45° Short Elbow 2WK




SIZE	A	B	T
1.0"	25.4	15.8	1.65
1.5"	38.1	23.8	1.65
2.0"	50.8	31.75	1.65
2.5"	63.5	39.6	1.65
3.0"	76.2	47.6	1.65
4.0"	101.6	63.5	2.10

90° Clamp Elbow 2CMP




SIZE	D	L	T
1.0"	25.4	50.8	1.65
1.5"	38.1	69.9	1.65
2.0"	50.8	88.9	1.65
2.5"	63.5	107.95	1.65
3.0"	76.2	127.0	1.65
4.0"	101.6	168.2	2.10

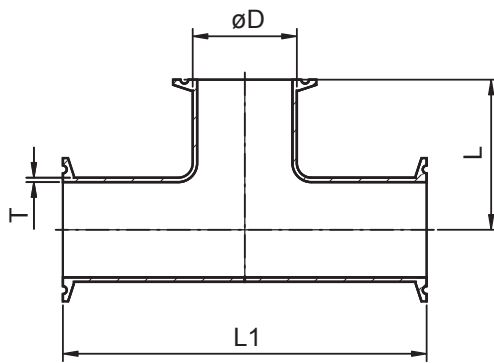

Clamp Long Tee 7MP


SIZE	D	L	L1	T
1.0"	25.4	60.3	120.6	1.65
1.5"	38.1	69.9	139.8	1.65
2.0"	50.8	88.9	177.8	1.65
2.5"	63.5	88.9	177.8	1.65
3.0"	76.2	95.3	190.6	1.65
4.0"	101.6	114.2	228.4	2.10

Reducing Tee Clamp End L7RMP

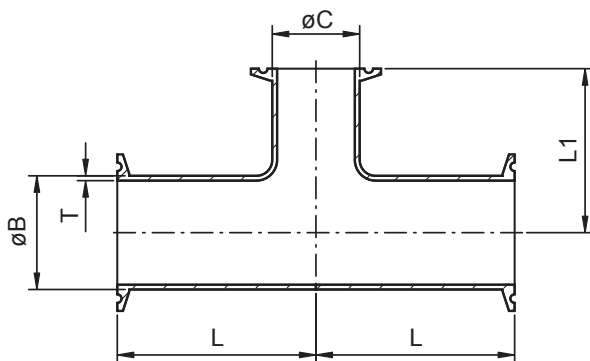


SIZE	B	C	L	L1	T
1.5"×1.0"	38.1	25.4	69.85	66.68	1.65
2.0"×1.0"	50.8	25.4	88.90	73.00	1.65
2.0"×1.5"	50.8	38.1	88.90	76.20	1.65
2.5"×1.5"	63.5	38.1	88.90	82.55	1.65
2.5"×2.0"	63.5	50.8	88.90	95.25	1.65
3.0"×1.5"	76.2	38.1	95.25	88.90	1.65
3.0"×2.0"	76.2	50.8	95.25	101.60	1.65
3.0"×2.5"	76.2	63.5	95.25	95.25	1.65
4.0"×2.0"	101.6	50.8	114.2	114.30	2.10
4.0"×2.5"	101.6	63.5	114.2	107.95	2.10
4.0"×3.0"	101.6	76.2	114.2	107.95	2.10

3A PIPE FITTING




45° Long Elbow L2KS

SIZE	A	B	T
1.0"	25.4	30.2	1.65
1.5"	38.1	41.3	1.65
2.0"	50.8	58.7	1.65
2.5"	63.5	76.2	1.65
3.0"	76.2	93.7	1.65
4.0"	101.6	122.2	2.10

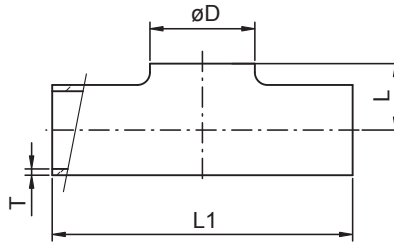


Equal Tee W/O Straight end

SIZE	D	L	L1	T
1.0"	25.4	16	57.2	1.65
1.5"	38.1	22	84.2	1.65
2.0"	50.8	29	104.8	1.65
2.5"	63.5	35	119.0	1.65
3.0"	76.2	41	131.8	1.65
4.0"	101.6	54	174.6	2.10

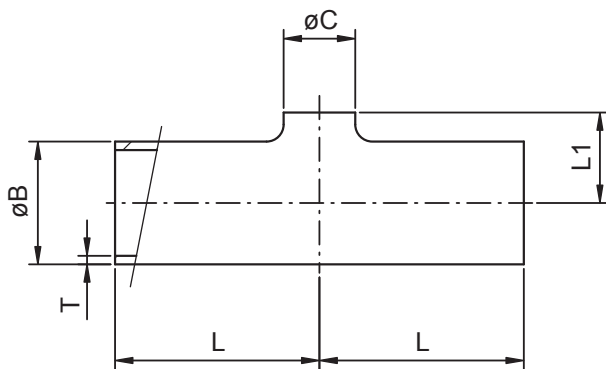


Reducing Tee W/O Straight end

SIZE	B	C	L	L1	T
1.5"×1.0"	38.1	25.4	42.1	22	1.65
2.0"×1.5"	50.8	38.1	52.4	29	1.65
2.5"×2.0"	63.5	50.8	59.5	35	1.65
3.0"×2.0"	76.2	50.8	65.9	41	1.65
3.0"×2.5"	76.2	63.5	65.9	41	1.65
4.0"×2.0"	101.6	50.8	117.5	54	2.10
4.0"×2.5"	101.6	63.5	117.5	54	2.10
4.0"×3.0"	101.6	76.2	117.5	54	2.10

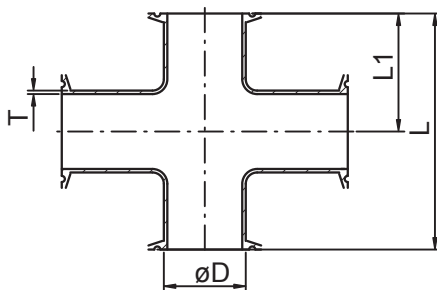

Clamp Long Cross 9MP

SIZE	D	L	L1	T
1.0"	25.4	120.6	60.3	1.65
1.5"	38.1	139.8	69.9	1.65
2.0"	50.8	177.8	88.9	1.65
2.5"	63.5	177.8	88.9	1.65
3.0"	76.2	190.6	95.3	1.65
4.0"	101.6	228.4	114.2	2.10

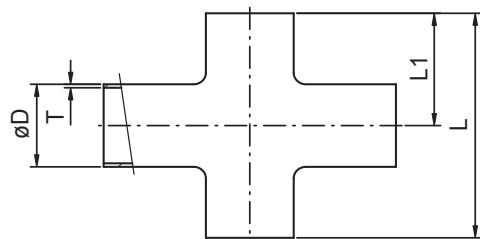

Cross


Short Cross L9WWW

SIZE	D	L	L1	T
1.0"	25.4	57.2	28.6	1.65
1.5"	38.1	84.2	42.1	1.65
2.0"	50.8	104.8	52.4	1.65
2.5"	63.5	119.0	59.5	1.65
3.0"	76.2	131.8	65.9	1.65
4.0"	101.6	174.6	87.3	2.10

Long Cross L9W

SIZE	D	L	L1	T
1.0"	25.4	95.2	47.6	1.65
1.5"	38.1	114.4	57.2	1.65
2.0"	50.8	152.4	76.2	1.65
2.5"	63.5	152.4	76.2	1.65
3.0"	76.2	165.2	82.6	1.65
4.0"	101.6	196.8	98.4	2.10

3A PIPE FITTING

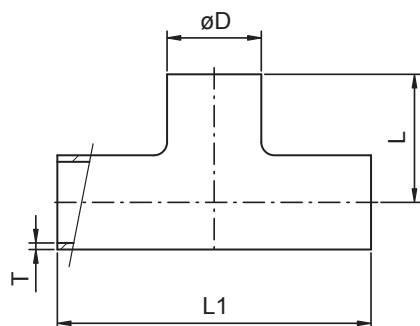


Welding Tee

Short Tee L7WWW

SIZE	D	L	L1	T
1.0"	25.4	28.6	57.2	1.65
1.5"	38.1	42.1	84.2	1.65
2.0"	50.8	52.4	104.8	1.65
2.5"	63.5	59.5	119.0	1.65
3.0"	76.2	65.9	131.8	1.65
4.0"	101.6	87.3	174.6	2.10


Long Tee 7W

SIZE	D	L	L1	T
1.0"	25.4	47.6	95.2	1.65
1.5"	38.1	57.2	114.4	1.65
2.0"	50.8	76.2	152.4	1.65
2.5"	63.5	76.2	152.4	1.65
3.0"	76.2	82.6	165.2	1.65
4.0"	101.6	98.4	196.8	2.10

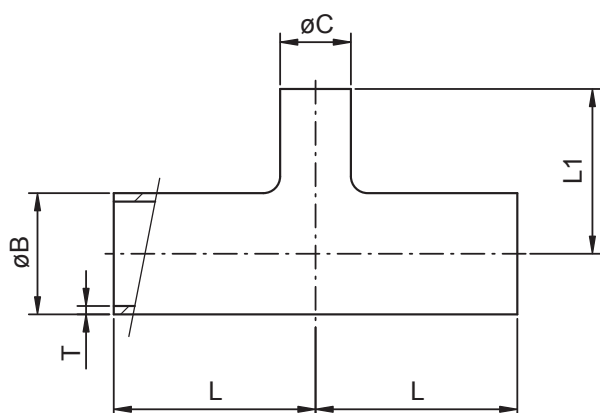


Reducing Tee L7RW

SIZE	B	C	L	L1	T
1.5" × 1.0"	38.1	25.4	57.15	53.98	1.65
2.0" × 1.0"	50.8	25.4	76.20	60.30	1.65
2.0" × 1.5"	50.8	38.1	76.20	63.50	1.65
2.5" × 1.5"	63.5	38.1	76.20	69.85	1.65
2.5" × 2.0"	63.5	50.8	76.20	82.55	1.65
3.0" × 1.5"	76.2	38.1	82.55	76.20	1.65
3.0" × 2.0"	76.2	50.8	82.55	88.90	1.65
3.0" × 2.5"	76.2	63.5	82.55	82.55	1.65
4.0" × 2.0"	101.6	50.8	98.40	101.60	2.10
4.0" × 2.5"	101.6	63.5	98.40	95.25	2.10
4.0" × 3.0"	101.6	76.2	98.40	95.25	2.10



45° Clamp Elbow 2KMP


SIZE	A	B	T
1.0"	25.4	28.5	1.65
1.5"	38.1	36.5	1.65
2.0"	50.8	44.45	1.65
2.5"	63.5	52.3	1.65
3.0"	76.2	60.3	1.65
4.0"	101.6	76.2	2.10

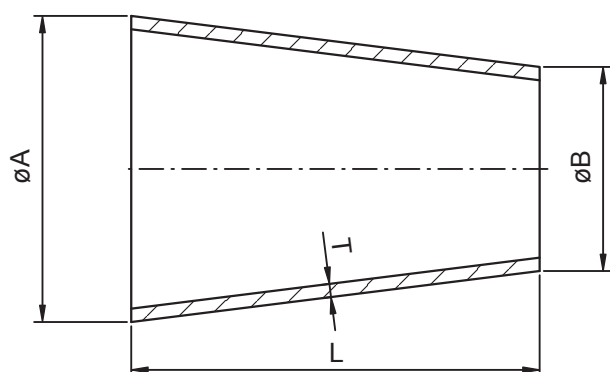

Concentric Reducer L31


SIZE	A	B	L	T
1.5" × 1.0"	38.1	25.4	50.8	1.65
2.0" × 1.5"	50.8	38.1	50.8	1.65
2.5" × 1.5"	63.5	38.1	101.6	1.65
2.5" × 2.0"	63.5	50.8	50.8	1.65
3.0" × 1.5"	76.2	38.1	152.4	1.65
3.0" × 2.0"	76.2	50.8	101.6	1.65
3.0" × 2.5"	76.2	63.5	50.8	1.65
4.0" × 1.5"	101.6	38.1	254.0	2.10
4.0" × 2.0"	101.6	50.8	203.2	2.10
4.0" × 2.5"	101.6	63.5	152.4	2.10
4.0" × 3.0"	101.6	76.2	101.6	2.10

3A PIPE FITTING

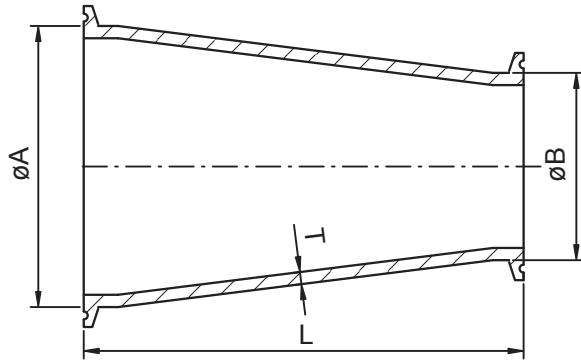


Concentric Reducer 31-14MP

SIZE	A	B	L	T
1.5"×1.0"	38.1	25.4	76.2	1.65
2.0"×1.5"	50.8	38.1	76.2	1.65
2.5"×1.5"	63.5	38.1	127.0	1.65
2.5"×2.0"	63.5	50.8	76.2	1.65
3.0"×1.5"	76.2	38.1	177.8	1.65
3.0"×2.0"	76.2	50.8	127.0	1.65
3.0"×2.5"	76.2	63.5	76.2	1.65
4.0"×1.5"	101.6	38.1	282.5	2.10
4.0"×2.0"	101.6	50.8	231.7	2.10
4.0"×2.5"	101.6	63.5	180.9	2.10
4.0"×3.0"	101.6	76.2	130.1	2.10

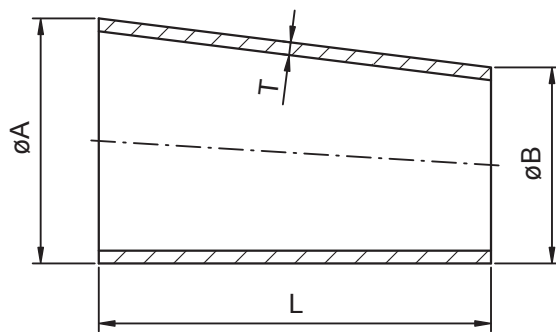

Eccentric Reducer L32

SIZE	A	B	L	T
1.5"×1.0"	38.1	25.4	50.8	1.65
2.0"×1.5"	50.8	38.1	50.8	1.65
2.5"×1.5"	63.5	38.1	101.6	1.65
2.5"×2.0"	63.5	50.8	50.8	1.65
3.0"×1.5"	76.2	38.1	152.4	1.65
3.0"×2.0"	76.2	50.8	101.6	1.65
3.0"×2.5"	76.2	63.5	50.8	1.65
4.0"×1.5"	101.6	38.1	254.0	2.10
4.0"×2.0"	101.6	50.8	203.2	2.10
4.0"×2.5"	101.6	63.5	152.4	2.10
4.0"×3.0"	101.6	76.2	101.6	2.10

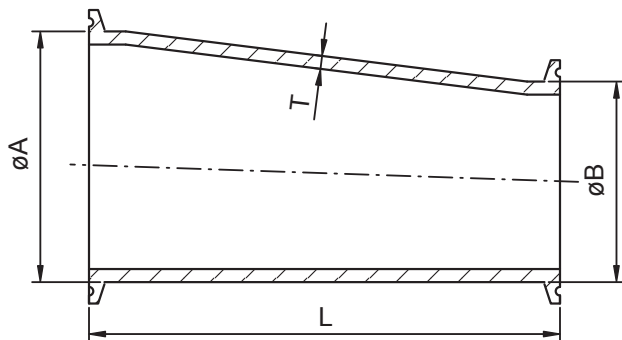

Eccentric Reducer 32-14MP

SIZE	A	B	L	T
1.5"×1.0"	38.1	25.4	76.2	1.65
2.0"×1.5"	50.8	38.1	76.2	1.65
2.5"×1.5"	63.5	38.1	127.0	1.65
2.5"×2.0"	63.5	50.8	76.2	1.65
3.0"×1.5"	76.2	38.1	177.8	1.65
3.0"×2.0"	76.2	50.8	127.0	1.65
3.0"×2.5"	76.2	63.5	76.2	1.65
4.0"×1.5"	101.6	38.1	282.5	2.10
4.0"×2.0"	101.6	50.8	231.7	2.10
4.0"×2.5"	101.6	63.5	180.9	2.10
4.0"×3.0"	101.6	76.2	130.1	2.10




MY DREAM

ISO 9001

BPE PIPE FITTING

BPE-2S 90° Bend


DT-7



SIZE	D	L	T
1/2"	12.7	76.2	1.65
3/4"	19.05	76.2	1.65
1.0"	25.4	76.2	1.65
1.5"	38.1	95.3	1.65
2.0"	50.8	120.7	1.65
2.5"	63.5	139.7	1.65
3.0"	76.2	158.8	1.65
4.0"	101.6	203.2	2.10

BPE-2KS 45° Elbow



DT-8



SIZE	A	B	T
1/2"	12.7	57.2	1.65
3/4"	19.05	57.2	1.65
1.0"	25.4	57.2	1.65
1.5"	38.1	63.5	1.65
2.0"	50.8	76.2	1.65
2.5"	63.5	85.7	1.65
3.0"	76.2	92.1	1.65
4.0"	101.6	114.3	2.10

BPE-7W Tee & BPE-9W Cross


DT-9

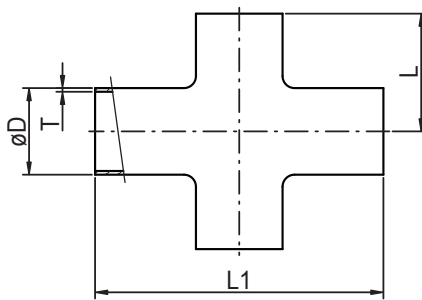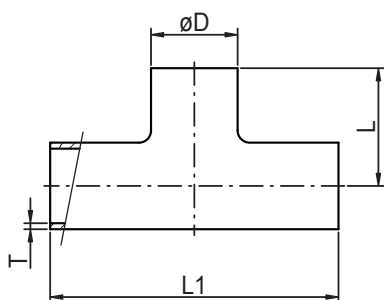

SIZE	D	L	L1	T
1/2"	12.7	47.6	95.2	1.65
3/4"	19.05	50.8	101.6	1.65
1.0"	25.4	54	108	1.65
1.5"	38.1	60.3	120.6	1.65
2.0"	50.8	73	146	1.65
2.5"	63.5	79.4	158.8	1.65
3.0"	76.2	85.7	171.4	1.65
4.0"	101.6	104.8	209.6	2.10

BPE-2CMP 90° Clamp Bend


DT-16



SIZE	D	L	T
1/2"	12.7	41.3	1.65
3/4"	19.05	41.3	1.65
1.0"	25.4	50.8	1.65
1.5"	38.1	69.9	1.65
2.0"	50.8	88.9	1.65
2.5"	63.5	108	1.65
3.0"	76.2	127	1.65
4.0"	101.6	168.3	2.10


BPE-2KMP 45° Clamp Elbow

DT-17




SIZE	A	B	T
1/2"	12.7	25.4	1.65
3/4"	19.05	25.4	1.65
1.0"	25.4	28.6	1.65
1.5"	38.1	36.5	1.65
2.0"	50.8	44.45	1.65
2.5"	63.5	52.4	1.65
3.0"	76.2	60.3	1.65
4.0"	101.6	79.4	2.10

BS PIPE FITTING

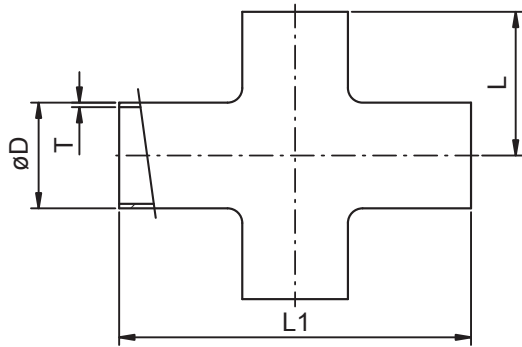

Cross Short Cross

SIZE	D	L	L1	T
1.0"	25.4	65	130	1.65
1.5"	38.1	85	170	1.65
2.0"	50.8	110	220	1.65
2.5"	63.5	135	270	1.65
3.0"	76.2	155	310	1.65
4.0"	101.6	195	390	2.10

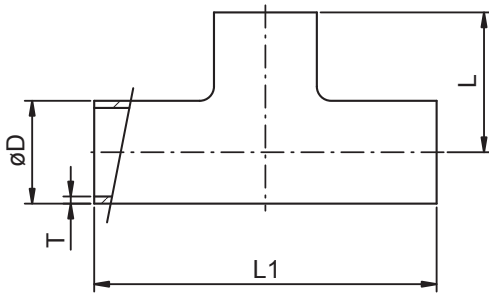


Welding Tee

Welding Tee

SIZE	D	L	L1	T
1.0"	25.4	43.5	87	1.65
1.5"	38.1	63.5	127	1.65
2.0"	50.8	88.5	177	1.65
2.5"	63.5	113.5	227	1.65
3.0"	76.2	133.5	267	1.65
4.0"	101.6	173.5	347	2.10


Long Tee

SIZE	D	L	L1	T
1.0"	25.4	65	130	1.65
1.5"	38.1	85	170	1.65
2.0"	50.8	110	220	1.65
2.5"	63.5	135	270	1.65
3.0"	76.2	155	310	1.65
4.0"	101.6	195	390	2.10

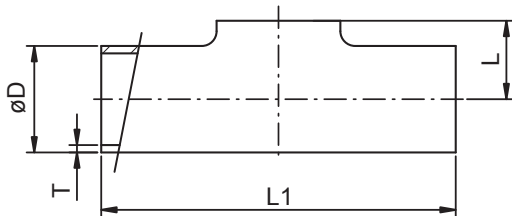

Pull Tee

SIZE	D	L	L1	T
1.0"	25.4	14.2	87	1.65
1.5"	38.1	21.6	127	1.65
2.0"	50.8	29.1	177	1.65
2.5"	63.5	35.3	227	1.65
3.0"	76.2	41.4	267	1.65
4.0"	101.6	54.7	347	2.10

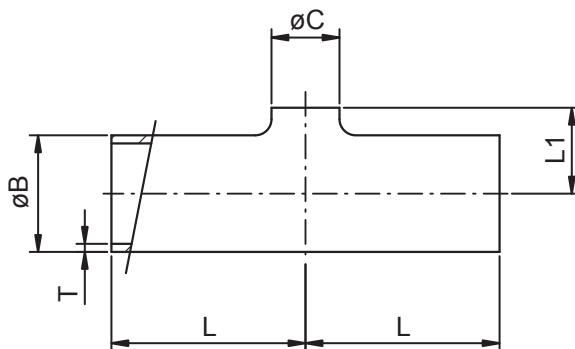


Reducing Tee

Reducing Tee W/O Straight end


SIZE	B	C	L	L1	T
1.5" × 1.0"	38.1	25.4	63.5	22	1.65
2.0" × 1.0"	50.8	25.4	88.5	29	1.65
2.0" × 1.5"	50.8	38.1	88.5	29	1.65
2.5" × 1.0"	63.5	25.4	113.5	35	1.65
2.5" × 1.5"	63.5	38.1	113.5	35	1.65
2.5" × 2.0"	63.5	50.8	113.5	35	1.65
3.0" × 1.0"	76.2	25.4	132	41	1.65
3.0" × 1.5"	76.2	38.1	129	41	1.65
3.0" × 2.0"	76.2	50.8	112	41	1.65
3.0" × 2.5"	76.2	63.5	112	41	1.65
4.0" × 2.0"	101.6	50.8	173.5	55	2.10
4.0" × 2.5"	101.6	63.5	173.5	55	2.10
4.0" × 3.0"	101.6	76.2	173.5	55	2.10

Concentric Reducer

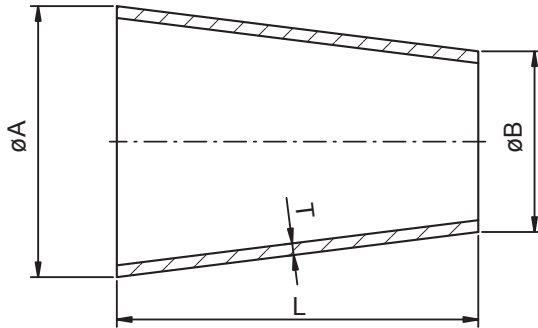


SIZE	A	B	L	T
1.5"×1.0"	38.1	25.4	29	1.65
2.0"×1.0"	50.8	25.4	53	1.65
2.0"×1.5"	50.8	38.1	41	1.65
2.5"×1.0"	63.5	25.4	82	1.65
2.5"×1.5"	63.5	38.1	64	1.65
2.5"×2.0"	63.5	50.8	40	1.65
3.0"×1.0"	76.2	25.4	110	1.65
3.0"×1.5"	76.2	38.1	81	1.65
3.0"×2.0"	76.2	50.8	55	1.65
3.0"×2.5"	76.2	63.5	41	1.65
4.0"×1.5"	101.6	38.1	135	2.10
4.0"×2.0"	101.6	50.8	106	2.10
4.0"×2.5"	101.6	63.5	76	2.10
4.0"×3.0"	101.6	76.2	53	2.10

Eccentric Reducer

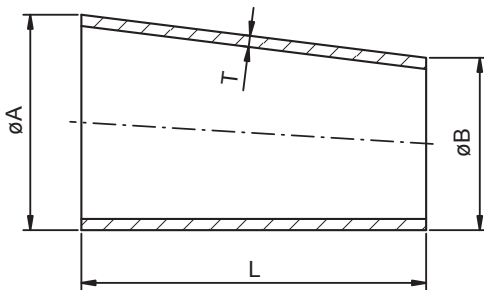


SIZE	A	B	L	T
1.5"×1.0"	38.1	25.4	35	1.65
2.0"×1.0"	50.8	25.4	54	1.65
2.0"×1.5"	50.8	38.1	36	1.65
2.5"×1.0"	63.5	25.4	76	1.65
2.5"×1.5"	63.5	38.1	66	1.65
2.5"×2.0"	63.5	50.8	35	1.65
3.0"×1.0"	76.2	25.4	112	1.65
3.0"×1.5"	76.2	38.1	78	1.65
3.0"×2.0"	76.2	50.8	66	1.65
3.0"×2.5"	76.2	63.5	44	1.65
4.0"×1.5"	101.6	38.1	122	2.10
4.0"×2.0"	101.6	50.8	97	2.10
4.0"×2.5"	101.6	63.5	73	2.10
4.0"×3.0"	101.6	76.2	77	2.10



45° Long Elbow


SIZE	A	B	T
1.0"	25.4	30.2	1.65
1.5"	38.1	41.3	1.65
2.0"	50.8	58.7	1.65
2.5"	63.5	76.2	1.65
3.0"	76.2	93.7	1.65
4.0"	101.6	122.2	2.10

90° Long Tube Bend



SIZE	D	L	T
1.0"	25.4	65	1.65
1.5"	38.1	85	1.65
2.0"	50.8	110	1.65
2.5"	63.5	135	1.65
3.0"	76.2	155	1.65
4.0"	101.6	195	2.10

90° Short Tube Bend



SIZE	D	L	T
1.0"	25.4	43.5	1.65
1.5"	38.1	63.5	1.65
2.0"	50.8	88.5	1.65
2.5"	63.5	113.5	1.65
3.0"	76.2	133.5	1.65
4.0"	101.6	173.5	2.10

蝶阀. BUTTERFLY VALVE

应用Applications

蝶阀，无论手动或者自动操作，都可以用到食品加工，制药和化工等工业的流体产品应用中。

Manual and automatic butterfly valves can be used in fluid products, food-processing, pharmaceutical and chemical industries.

工作原理Working Principles

蝶阀可以通过执行器自动操作也可由手柄手动操作。

手柄控制阀门“开”和“关闭”的位置，当然也可以调节到其他间的位置。

执行器把活塞的轴向运动转换成90度旋转运动，传输给蝶阀。

Manual valve: The butterfly valves can be actuated or manually operated by handle.

Handle controls the valve “open” or “closed” position, and other positions are available.

Automatic valve: A spring in cylinder works axially, then turning into 90 degree rotating on the stem of butterfly valve, in this way, butterfly valve open or closed automatically.

技术规格Technical specifications

阀门/VALVE

最大压力Max pressure: 1000 kPa/10bar(DN25/1"–DN100/4")

8bar(DN125/5"–DN150/6")

最小压力Min pressure: 0.2bar

工作温度Working temp: -10℃ to +120℃ (EPDM)

执行器/ACTUATOR

Max. air pressure: 700 kPa (7 bar)

Min. air pressure, NC and NO: 400 kPa (4 bar)

Temperature range: -25° C to +90° C

材质Materials

Forged disc: SS316L or 304

Forged valve body: SS316 or 304

Other steel part: SS304 or SS316

Seal: Silicone/EPDM/Viton, FDA certificated

Handle: SS304/Plastic

Surface roughness: $Ra \leq 0.8 \mu m$

选项Options

连接: 焊接, 卡箍, 螺纹, 单焊接单螺纹, 由任式, 法兰式, DIN, SMS, RJT, ISO, IDF, 3A

手柄: 二定位, 三定位, 四定位拉杆手柄, 多位塑料手柄, 多位不锈钢手柄

执行器: 不锈钢气动执行器, 铝制气动执行器, 电动执行器

控制: 位置传感器

Connections: weld, clamped, threaded, union-nut, flanged. according to DIN, SMS, 3A, ISO, IDF norms


Handle: 2-position, 3-position, 4-position pulling handle, multi-position plastic handle, stainless steel trigger handle.

Actuator: stainless steel actuator. Aluminum actuator. Electric actuator

Control head: Intelligent top, limit switches.

蝶阀. BUTTERFLY VALVE

Explode View of Manual Butterfly Valve

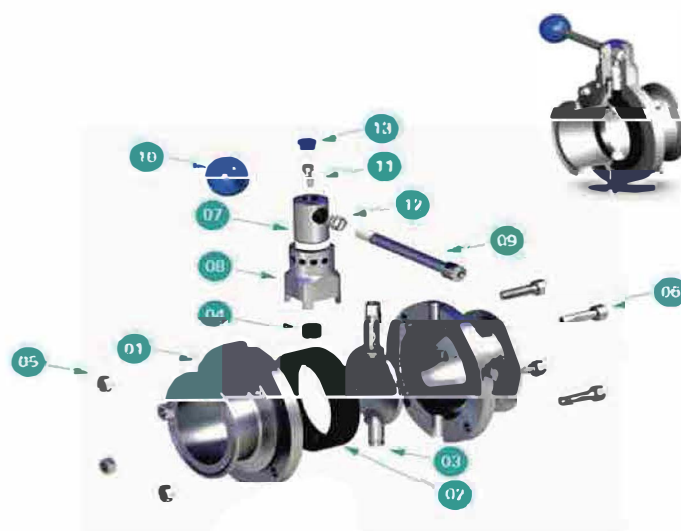


Part list


Part no	Description
1	阀体 Valve Body
2	密封圈 Gasket
3	蝶板 Disc
4	衬套 Bush
5	六角螺母 Hex Nut
6	螺栓 Bolt
7	连接轴 shaft
8	手柄支架 Handle support
9	手柄球 handle ball
10	手柄 Pulling handle
11	螺栓 Bolt
12	弹簧 Spring
13	塑料塞 plastic cap

Part list


Part no	Description
1	阀体 Valve Body
2	蝶板 Disc
3	密封圈 Seal
4	衬套 Bush
5	摆针 Indicator
6	连接轴 shaft
7	执行器 Actuator
8	气嘴 Air connection
9	消声器 Silencer
10	销钉 Pin
11	支架 Bracket
12	螺栓 Bolt
13	塑料塞 Plastic cap
14	螺母 Nut

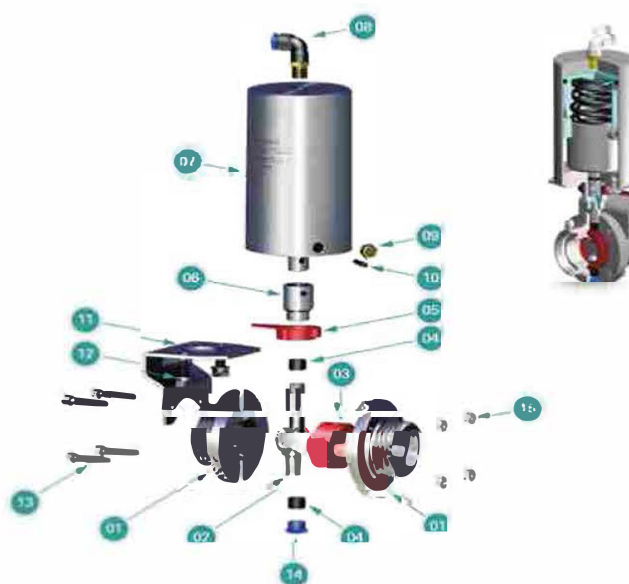

不同的驱动方式和手柄款式 Different configurations

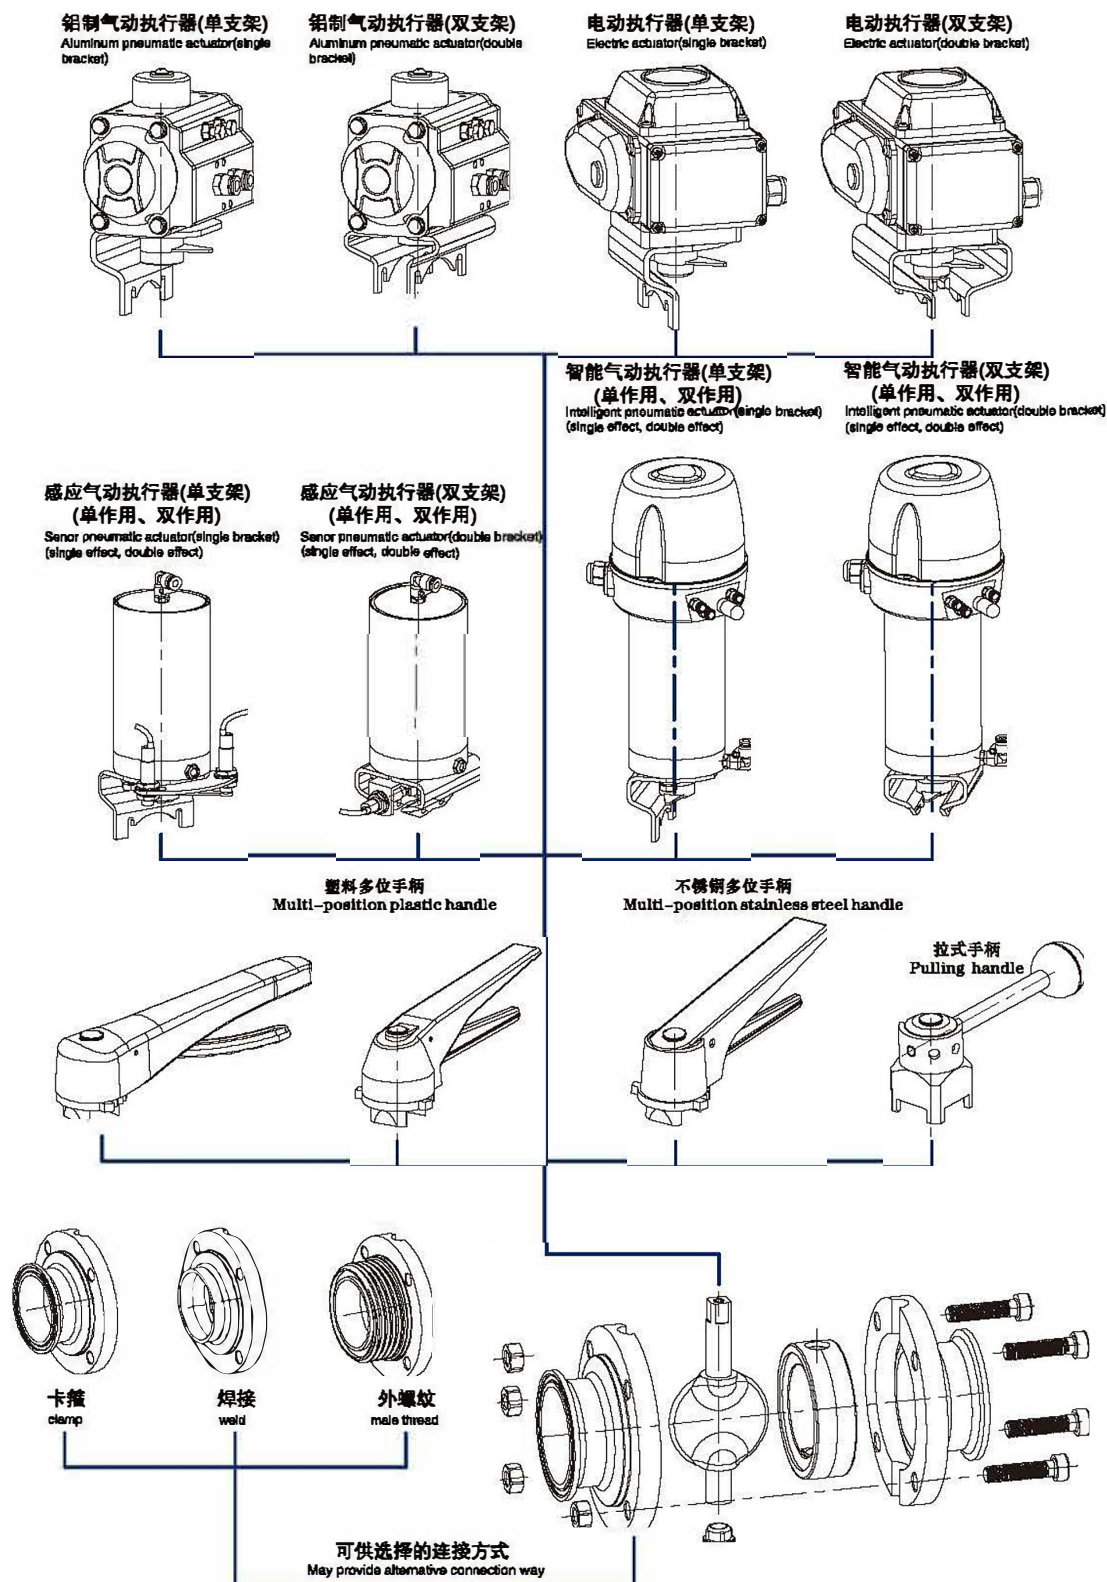

手柄类型 Types of handle

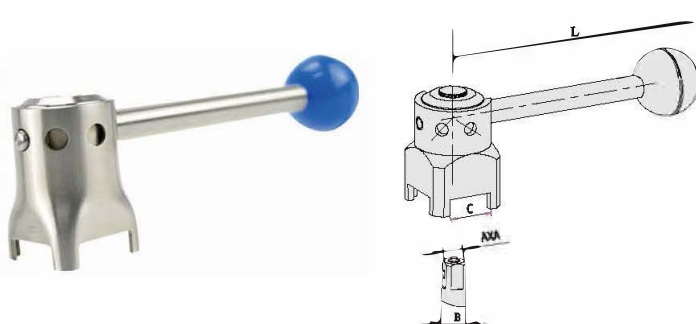

拉式手柄


Pulling handle(2,3,4 position)

SIZE		A	B	C	L
DN25-DN50	1"-2"	8X8	12	20	130
DN65-DN100	2.5"-4"	10X10	14	22	160
DN125-DN150	5"-6"	12X12	15	26	200

调节方式：2个定位、3个定位、4个定位；可装配所有蝶阀。
Adjusting: 2 position, 3 position, 4 position

塑料多位手柄抓握型

Plastic multi-position trigger handle
Full stainless steel is available

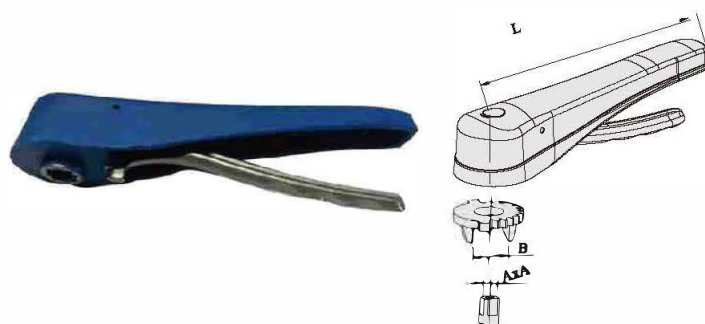


Size	B	L	A
DN10-DN40	Ø19-Ø45	1/2"-1 1/2"	20.2 144 8x8
DN50	Ø48-Ø51	2"	22.2 144 8x8
DN65	Ø63-Ø76	2 1/2"-3"	22.2 160 10x10
DN80-DN100	Ø89-Ø108	3 1/2"-4"	22.2 160 10x10

调节方式：可通过15°位置调节开启大小，共有十二个定位；可装配所有蝶阀。
Adjusting: 15°, 12 position

塑料多位手柄鸭嘴型


Plastic multi-position handle

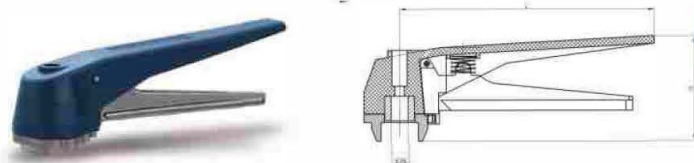

Size	H	L	KxK
DN10-DN40	0.5"-1.5"	76	150 8x8
DN50-DN65	2"-3"	76	150 10x10
DN80-DN125	3.5"-5"	76	150 11x11

不锈钢多位手柄鸭嘴型


Stainless steel multi-position handle

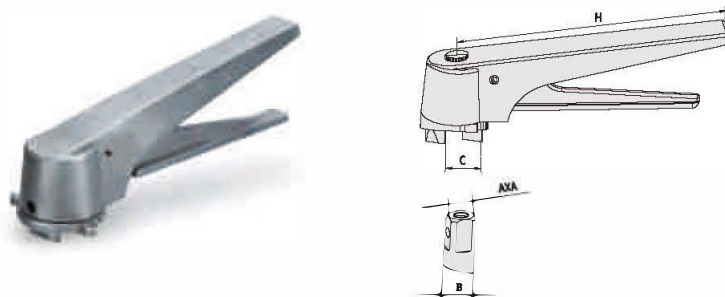

SIZE	A	B	C	H
DN25-DN50	1"-2"	8X8	10.8	20 8X8
DN65	2.5"-3"	10X10	11.8	22 10X10
DN80-100	4"	11X11	14.8	22 10X10

调节方式：可通过15°位置调节开启大小，共有十二个定位；可装配所有蝶阀。
Adjusting: 15°, 12 position

Manual Welded Butterfly Valve

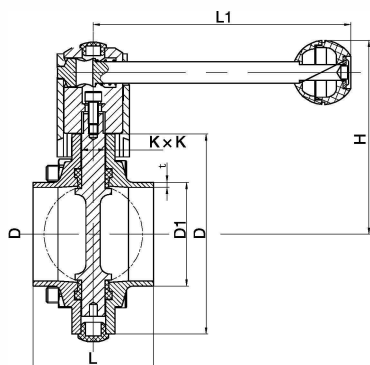


DIN焊接蝶阀/DIN Welded butterfly valve

Part no:BUV01

Size	D1		D	L	L1	H	T	KXK
	1	2						
DN10	12	13	78	50	126	86	1.5	8x8
DN15	18	19	78	50	126	86	1.5	8x8
DN20	22	23	78	50	126	86	1.5	8x8
DN25	28	29	78	50	126	86	1.5	8x8
DN32	34	35	86	50	126	90	1.5	8x8
DN40	40	41	90	50	126	92	1.5	8x8
DN50	52	53	106	52	133	104	1.5	10x10
DN65	70	-	124	56	144	113	2.0	10x10
DN80	85	-	139	60	160	123.5	2.0	11x11
DN100	104	-	159	64	160	133.5	2.0	11x11
DN125	129	-	185	80	220	146.5	2.0	11x11
DN150	154	-	215	90	220	161.5	2.0	11x11
DN200	204	-	285	90	284	199	2.0	11x11

3A,SMS,ISO,IDF焊接蝶阀/Inch Welded butterfly valve


Part no:BUV02

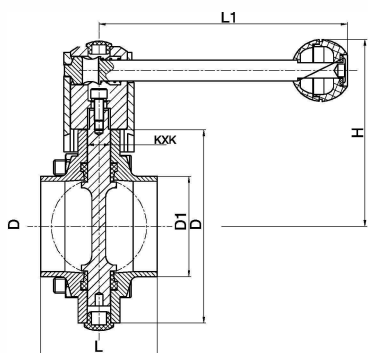

Size	D1	D	L	L1	H	KXK
1/2"	12.7	78	50	126	86	8x8
3/4"	19	78	50	126	86	8x8
1"	25.4	78	50	126	86	8x8
1 1/4"	31.8	78	50	126	86	8x8
1 1/2"	38.1	86	50	126	90	8x8
45	45	90	50	126	92	8x8
48	48	95	52	126	95	8x8
2"	50.8	102	52	133	102	10x10
57	57	106	52	144	104	10x10
2 1/2"	63.5	115	56	144	109	10x10
3"	76.2	128	56	144	115	10x10
3.5"	89	139	60	144	123.5	11x11
4"	102	154	64	144	131	11x11
108	108	159	64	160	133.5	11x11
114	114.3	185	80	160	133.5	11x11
5"	127	185	80	220	146.5	11x11
133	133	215	80	220	146.5	11x11
6"	152.4	215	90	220	161.5	11x11
159	159	215	90	220	161.5	11x11
168.3	168.3	215	90	220	161.5	11x11
8"	203.2	285	90	284	199	14x14
219	219	285	90	284	199	14x14


Manual Clamped Butterfly Valve

DIN卡箍蝶阀/DIN Clamped butterfly valve
Part no:BUV03



Size	D1	D	L	L1	H	KXK
DN10	34	78	66	126	86	8x8
DN15	34	78	66	126	86	8x8
DN20	34	78	66	126	86	8x8
DN25	50.5	78	66	126	86	8x8
DN32	50.5	78	66	126	86	8x8
DN40	50.5	86	70	126	90	8x8
DN50	64	102	76	133	102	10x10
DN65	91	120	80	144	111	10x10
DN80	106	134	84	160	121	11x11
DN100	119	154	104	160	131	11x11
DN125	144.5	185	122	220	146.5	11x11
DN125	155	185	122	220	146.5	11x11
DN150	167	215	146	220	161.5	11x11
DN150	183	215	146	220	161.5	11x11
DN200	217.4	285	166	284	199	14x14
DN200	233.5	285	166	284	199	14x14


3A,SMS,ISO,IDF卡箍蝶阀/inch Clamped butterfly valve
Part no:BUV04



Size	D1	D	L	L1	H	KXK
1/2"	25.4	78	66	126	86	8x8
3/4"	25.4	78	66	126	86	8x8
1"	50.5	78	66	126	86	8x8
1 1/4"	50.5	78	66	126	86	8x8
1 1/2"	50.5	86	70	126	90	8x8
45	64	90	74	126	92	8x8
48	64	95	76	126	95	8x8
2"	64	102	76	133	102	10x10
57	77.5	106	76	144	104	10x10
2 1/2"	77.5	115	80	144	109	10x10
3"	91	128	84	144	115	10x10
3.5"	106	139	86	144	123.5	11x11
4"	119	154	104	144	131	11x11
108	119	159	106	160	133.5	11x11
114	130	159	106	160	133.5	11x11
5"	144.5	185	122	220	146.5	11x11
133	155	185	122	220	146.5	11x11
6"	167	215	146	220	161.5	11x11
159	183	215	146	220	161.5	11x11
168.3	183	215	146	220	161.5	11x11
8"	217.4	285	166.8	284	199	14x14
219	233.5	285	166.8	284	199	14x14


Manual Threaded Butterfly Valve

DIN螺纹蝶阀/DIN threaded butterfly valve
Part no:BUV05




Size	DN	D	L	L1	H	G	KXK
DN10	10	78	66	126	86	RD28x1/8	8x8
DN15	15	78	66	126	86	RD34x1/8	8x8
DN20	19	78	66	126	86	RD44x1/6	8x8
DN25	25	78	66	126	86	RD52x1/6	8x8
DN32	31	86	70	126	90	RD58x1/6	8x8
DN40	37	90	74	126	92	RD65x1/6	8x8
DN50	49	106	76	133	104	RD78x1/6	10x10
DN65	66	124	80	144	113	RD95x1/6	10x10
DN80	81	139	84	160	123.5	RD110x1/4	11x11
DN100	100	159	104	160	133.5	RD130x1/4	11x11
DN125	125	185	130	220	146.5	RD160x1/4	11x11
DN150	150	215	150	220	161.5	RD190x1/4	11x11

SMS螺纹蝶阀/SMS threaded butterfly valve
Part no:BUV06




Size	DN	D	L	L1	H	G	KXK
Φ19	16	78	66	126	86	RD36x1/8	8x8
Φ25	22.4	78	66	126	86	RD40x1/6	8x8
Φ32	28.8	78	66	126	86	RD48x1/6	8x8
Φ38	35.1	86	70	126	90	RD60x1/6	8x8
Φ51	47.8	102	76	133	102	RD70x1/6	10x10
Φ63	59.5	115	80	144	109	RD85x1/6	10x10
Φ76	72.2	128	84	144	115	RD98x1/6	10x10
Φ89	85	139	86	160	123.5	RD110x1/6	11x11
Φ102 小	97.6	154	104	160	131	RD125x1/6	11x11
Φ102 大	97.6	159	104	160	133.5	RD132x1/6	11x11



RJT螺纹蝶阀/RJT butterfly valve with males ends
Part no:BUV07


Size	DN	D	L	L1	H	G	KXK
1"	22.2	78	80	126	86	45.7x1/8TWHIT	8x8
1 1/2"	34.9	86	80	126	90	58.4x1/8TWHIT	8x8
2"	47.6	102	84	133	102	72.7x1/6TWHIT	10x10
2 1/2"	60.3	115	84	144	109	85.4x1/6TWHIT	10x10
3"	73.0	128	84	144	115	98.1x1/6TWHIT	10x10
4"	97.5	154	104	160	131	123.8x1/6TWHIT	11x11
6"	148	215	150	220	161.5	174.3x1/6TWHIT	11x11

Manual Threaded Butterfly Valve




3A螺纹蝶阀/3A threaded butterfly valve
Part no:BUV08

Size	DN	D	L	L1	H	G	KXK
1"	22.1	78	66	126	86	37.1x1/8Acme	8x8
1 1/4"	28.8	78	70	126	86	45.9x1/8Acme	8x8
1 1/2"	34.8	86	70	126	90	50.6x1/8Acme	8x8
2"	47.5	102	76	133	102	64.1x1/8Acme	10x10
2 1/2"	60.2	115	80	144	109	77.6x1/8Acme	10x10
3"	72.9	128	84	144	115	91.1x1/8Acme	10x10
4"	97.4	154	104	160	131	119.2x1/6Acme	11x11



ISO IDF螺纹蝶阀/ISO IDF threaded butterfly valve
Part no:BUV09

Size	DN	D	L	L1	H	G	KXK
1"	22.4	78	72	126	86	37.1x1/8Acme	8x8
1 1/2"	35.1	86	76	126	90	50.6x1/8Acme	8x8
2"	47.8	102	82	133	102	64.1x1/8Acme	10x10
2 1/2"	59.5	115	86	144	109	77.6x1/8Acme	10x10
3"	72.2	128	90	144	115	91.1x1/8Acme	10x10
4"(ISO)	97.6	154	110	160	131	118.2x1/8Acme	11x11
4"(IDF)	97.6	154	110	160	131	125.9x1/6Acme	11x11




DS螺纹蝶阀/DS threaded butterfly valve
Part no:BUV10

Size	DN	D	L	L1	H	G	KXK
1"	22.4	78	66	126	86	RD44x1/6	8x8
1 1/4"	28.8	78	66	126	86	RD52x1/6	8x8
1 1/2"	35.1	86	70	126	90	RD58x1/6	8x8
2"	47.8	102	76	133	102	RD72x1/6	10x10
2 1/2"	59.5	115	80	144	109	RD88x1/6	10x10
3"	72.2	128	84	144	115	RD100x1/6	10x10
4"	97.6	154	104	160	131	RD130x1/4	11x11

蝶阀. BUTTERFLY VALVE


Manual Weld/Threaded Butterfly Valve

DIN单焊单螺纹蝶阀 DIN welded/threaded butterfly valve
Part no:BUV011

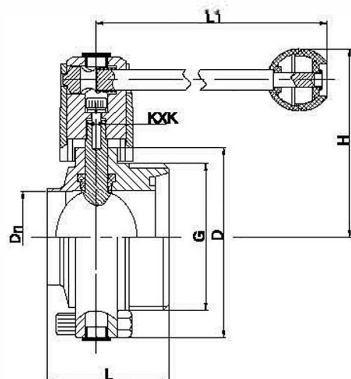


Size	DN	D	L	L1	H	G	KxK
DN10	10	78	58	126	86	RD28x1/8	8x8
DN15	15	78	58	126	86	RD34x1/8	8x8
DN20	19	78	58	126	86	RD44x1/6	8x8
DN25	25	78	58	126	86	RD52x1/6	8x8
DN32	31	86	60	126	90	RD58x1/6	8x8
DN40	37	90	62	126	92	RD65x1/6	8x8
DN50	49	106	64	133	104	RD78x1/6	10x10
DN65	66	124	68	144	113	RD95x1/6	10x10
DN80	81	139	72	160	123.5	RD110x1/4	11x11
DN100	100	159	84	160	133.5	RD130x1/4	11x11
DN125	125	185	105	220	146.5	RD160x1/4	11x11
DN150	150	215	120	220	161.5	RD190x1/4	11x11

SMS单焊单螺纹蝶阀 SMS welded/threaded butterfly valve
Part no:BUV012

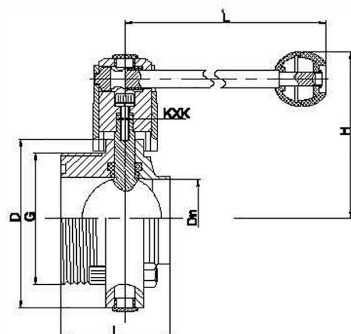

Size	DN	D	L	L1	H	G	KxK
Φ19	16	78	58	126	86	RD36x1/8	8x8
Φ25	22.4	78	58	126	86	RD40x1/6	8x8
Φ32	28.8	78	58	126	86	RD48x1/6	8x8
Φ38	35.1	86	60	126	90	RD60x1/6	8x8
Φ51	47.8	102	64	133	102	RD70x1/6	10x10
Φ63	59.5	115	68	144	109	RD85x1/6	10x10
Φ76	72.2	128	70	144	115	RD98x1/6	10x10
Φ89	85	139	73	160	123.5	RD110x1/6	11x11
Φ102 小	97.6	154	84	160	131	RD125x1/6	11x11
Φ102 大	97.6	159	84	160	133.5	RD132x1/6	11x11


ISO IDF单焊单螺纹蝶阀 ISO IDF welded/threaded
butterfly valve Part no:BUV013

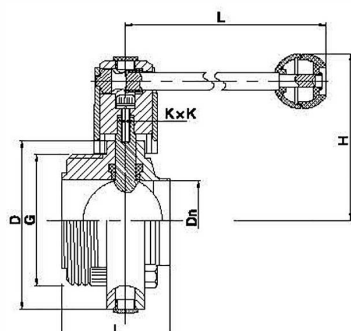

Size	DN	D	L	L1	H	G	KxK
1"	22.4	78	61	126	86	37.1x1/8Acme	8x8
1 1/2"	35.1	86	63	126	90	50.6x1/8Acme	8x8
2"	47.8	102	67	133	102	64.1x1/8Acme	10x10
2 1/2"	59.5	115	71	144	109	77.6x1/8Acme	10x10
3"	72.2	128	73	144	115	91.1x1/8Acme	10x10
4"(ISO)	97.6	154	87	160	131	118.2x1/8Acme	11x11
4"(IDF)	97.6	154	87	160	131	125.9x1/6Acme	11x11


Manual Weld/Threaded Butterfly Valve

RJT单焊单螺纹蝶阀 RJT welded/threaded butterfly valve
Part no:BUV014

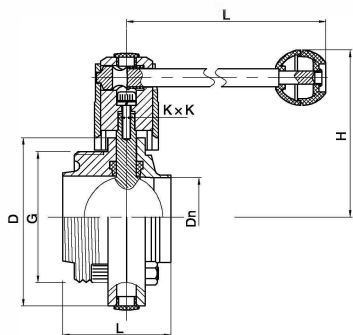


Size	DN	D	L	L1	H	G	KXK
1"	22.2	78	65	126	86	45.7x1/8TWHIT	8x8
1 1/2"	34.9	86	65	126	90	58.4x1/8TWHIT	8x8
2"	47.6	102	68	133	102	72.7x1/6TWHIT	10x10
2 1/2"	60.3	115	70	144	109	85.4x1/6TWHIT	10x10
3"	73.0	128	70	144	115	98.1x1/6TWHIT	10x10
4"	97.5	154	84	160	131	123.8x1/6TWHIT	11x11
6"	148	215	120	220	161.5	174.3x1/6TWHIT	11x11

3A单焊单螺纹蝶阀 3A welded/threaded butterfly valve
Part no:BUV015

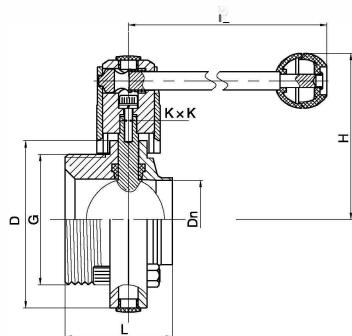

Size	DN	D	L	L1	H	G	KXK
1"	22.1	78	58	126	86	37.1x1/8Acme	8x8
1 1/4"	28.8	78	60	126	86	45.9x1/8Acme	8x8
1 1/2"	34.8	86	60	126	90	50.6x1/8Acme	8x8
2"	47.5	102	64	133	102	64.1x1/8Acme	10x10
2 1/2"	60.2	115	68	144	109	77.6x1/8Acme	10x10
3"	72.9	128	70	144	115	91.1x1/8Acme	10x10
4"	97.4	154	84	160	131	119.2x1/6Acme	11x11

DS单焊单螺纹蝶阀 DS welded/threaded butterfly valve
Part no:BUV016




Size	DN	D	L	L1	H	G	KXK
1"	22.4	78	58	126	86	RD44x1/6	8x8
1 1/4"	28.8	78	58	126	86	RD52x1/6	8x8
1 1/2"	35.1	86	60	126	90	RD58x1/6	8x8
2"	47.8	102	64	133	102	RD72x1/6	10x10
2 1/2"	59.5	115	68	144	109	RD88x1/6	10x10
3"	72.2	128	70	144	115	RD100x1/6	10x10
4"	97.6	154	84	160	131	RD130x1/4	11x11

蝶阀. BUTTERFLY VALVE


Manual Male/nut Butterfly Valve

DIN单螺纹单螺母蝶阀 DIN male/nut butterfly valve
Part no:BUV017

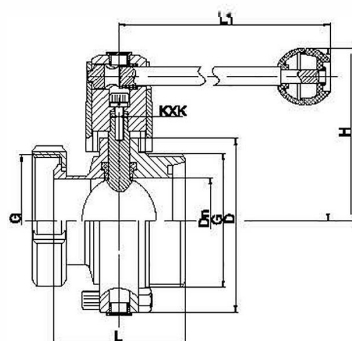


Size	DN	D	L	L1	H	G	KxK
DN10	10	78	75	126	86	RD28x1/8	8x8
DN15	15	78	75	126	86	RD34x1/8	8x8
DN20	19	78	76	126	86	RD44x1/6	8x8
DN25	25	78	80	126	86	RD52x1/6	8x8
DN32	31	86	85	126	90	RD58x1/6	8x8
DN40	37	90	88	126	92	RD65x1/6	8x8
DN50	49	106	92	133	104	RD78x1/6	10x10
DN65	66	124	100	144	113	RD95x1/6	10x10
DN80	81	139	109	160	123.5	RD110x1/4	11x11
DN100	100	159	128	160	133.5	RD130x1/4	11x11
DN125	125	185	139	220	146.5	RD160x1/4	11x11
DN150	150	215	157	220	161.5	RD190x1/4	11x11

SMS单螺纹单螺母蝶阀 SMS male/nut butterfly valve
Part no:BUV018

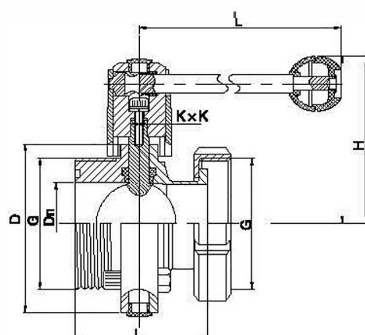

Size	DN	D	L	L1	H	G	KxK
Φ19	16	78	70	126	86	RD36x1/8	8x8
Φ25	22.4	78	73	126	86	RD40x1/6	8x8
Φ32	28.8	78	78	126	86	RD48x1/6	8x8
Φ38	35.1	86	80	126	90	RD60x1/6	8x8
Φ51	47.8	102	84	133	102	RD70x1/6	10x10
Φ63	59.5	115	89	144	109	RD85x1/6	10x10
Φ76	72.2	128	91	144	115	RD98x1/6	10x10
Φ89	85	139	94	160	123.5	RD110x1/6	11x11
Φ102 小	97.6	154	105	160	131	RD125x1/6	11x11
Φ102 大	97.6	159	105	160	133.5	RD132x1/6	11x11

RJT单螺纹单螺母蝶阀 RJT male/nut butterfly valve
Part no:BUV019




Size	DN	D	L	L1	H	G	KxK
1"	22.2	78	77.7	126	86	45.7x1/8TWHIT	8x8
1 1/2"	34.9	86	77.7	126	90	58.4x1/8TWHIT	8x8
2"	47.6	102	80.7	133	102	72.7x1/6TWHIT	10x10
2 1/2"	60.3	115	82.7	144	109	85.4x1/6TWHIT	10x10
3"	73.0	128	82.7	144	115	98.1x1/6TWHIT	10x10
4"	97.5	154	109.4	160	131	123.8x1/6TWHIT	11x11
6"	148	215	143.5	220	161.5	174.3x1/6TWHIT	11x11

蝶阀. BUTTERFLY VALVE


Manual 3-Piece Butterfly Valve

DIN三片式蝶阀 DIN 3-pc butterfly valve
Part no:BUV020

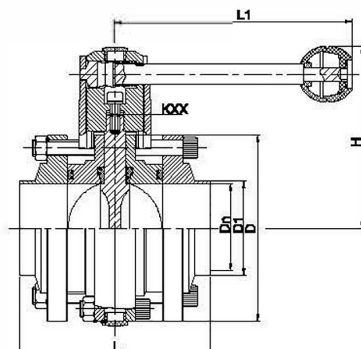

SIZE	1	2	D	L	L1	H	t	KXX
DN10	12	13	78	100	126	86	1.5	8X8
DN15	18	19	78	100	126	86	1.5	8X8
DN20	22	23	78	100	126	86	1.5	8X8
DN25	28	29	78	100	126	86	1.5	8X8
DN32	34	35	78	100	126	86	1.5	8X8
DN40	40	41	90	100	126	92	1.5	8X8
DN50	52	53	102	104	133	102	1.5	10X10
DN65	70	-	120	112	144	111	2.0	10X10
DN80	85	-	134	120	160	121	2.0	11X11
DN100	104	-	154	128	160	131	2.0	11X11
DN125	129	-	185	160	220	146.5	2.0	11X11
DN150	154	-	215	180	220	161.5	2.0	11X11
DN200	204	-	285	180	284	199	2.0	14X14


INCH三片式蝶阀 INCH 3-pc butterfly valve
Part no:BUV021

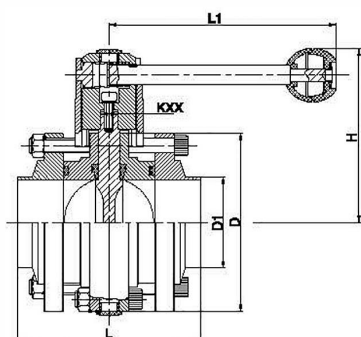

SIZE	D1	D	L	L1	H	KXX
1/2"	12.7	78	100	126	86	8X8
3/4"	19	78	100	126	86	8X8
1"	25.4	78	100	126	86	8X8
1 1/4"	31.8	78	100	126	86	8X8
1 1/2"	38.1	86	100	126	90	8X8
45	45	90	100	126	92	8X8
2"	50.8	102	104	133	102	10X10
57	57	102	104	144	104	10X10
2 1/2"	63.5	115	112	144	109	10X10
3"	76.2	128	112	144	115	10X10
3.5"	89	139	120	144	123.5	11X11
4"	101.6	154	128	144	131	11X11
108	108	159	128	160	133.5	11X11
114	114.3	159	128	160	133.5	11X11
5"	127	185	160	220	146.5	11X11
133	133	185	160	220	146.5	11X11
6"	152.4	215	180	220	161.5	11X11
159	159	215	180	220	161.5	11X11
168.3	168.3	215	180	220	161.5	11X11
8"	203.2	285	180	284	199	14X14
219	219	285	180	284	199	14x14

Actuator

不锈钢执行器

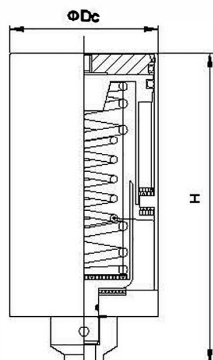

Stainless Steel Vertical Pneumatic Actuator
Part no:AC01

选项Option

单作用/Normally open, Normally close 双作用/air to air
可配接近开关或智能控制器或定位器/Limit switches or intelligent control head or positioner

Size	Dc	H	可配蝶阀 match with butterfly valve		可配球阀 match with ball valve	
Φ85	85.0	180.5	DN20-DN100	1"-4"	DN20-DN50	1"-2"
Φ108	108	223	DN125-DN150	5"-6"	DN65-DN80	2.5"-3"
Φ133	133	400	DN200	8"	DN100	4"



Aluminum Horizontal Actuator
Part no:AC02


选项Option

单作用/Normally open, Normally close 双作用/air to air
可配接近开关或智能控制器或定位器/Limit switches or intelligent control head or positioner


Size	L	H	可配蝶阀 match with butterfly valve		可配蝶式球阀 match with butterfly-type ball valve	
ZT050D	140	89	1"-1.25"	DN20-DN32	0.75"-1"	DN15-DN25
ZT063D	159	105	1.5"-2.5"	DN40-DN65	1.5"-2"	DN32-DN50
ZT075D	210	122	3"-3.5"	DN80	2.5"-3"	DN65-DN80
ZT088D	248	135	4"-5"	DN100-DN125	3"-4"	DN80-DN100
ZT100D	270	147	5"	DN125	4"	DN100

Please contact us for more detailed specifications

铝制气动执行器

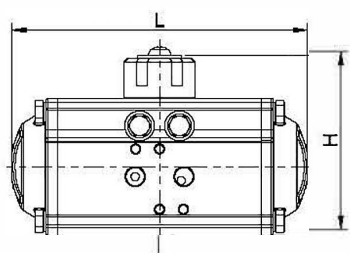

电动执行器




Electric Horizontal Actuator
Part no:AC03

电动装置: 开关到位灯、无源接触点信号、机内智能控制、1K 5K电位计

Electric: on-off indicator light, passive contact signal, intelligent control, 1k 5k potentiometer

Size	L	H	H1	可配蝶阀 match with butterfly valve		可配蝶式球阀 match with butterfly-type ball valve	
HL-05	157.5	115.0	103.0	1"-4"	DN20-DN100	1"-2"	DN15-DN25
HL-10	208.0	124.0	115.0	5"-8"	DN125-DN200	2 1/2"-3"	DN32-DN50
HL-20	280.0	135.0	109.0			4"	DN100

Please contact us for more detailed specifications

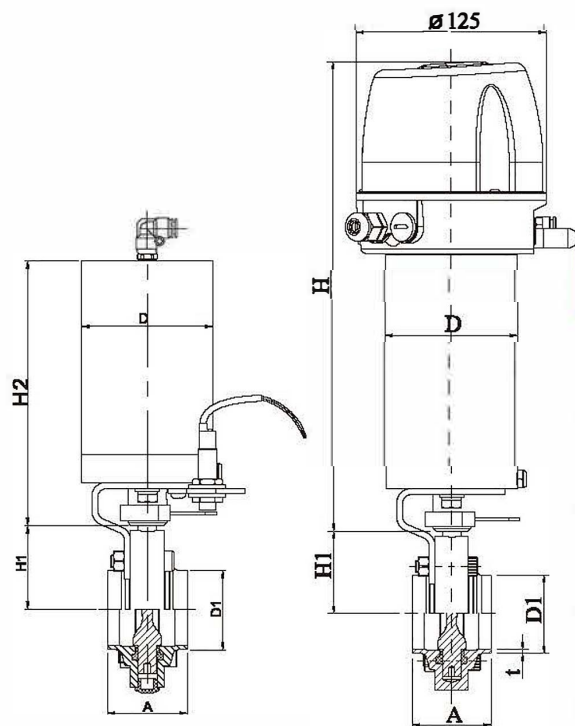


Part no:BUV022

BUV023

DIN 不锈钢气动焊接蝶阀
Pneumatic SS actuated welded butterfly valve

SIZE	D	A	H	H1	H2	D1	
						1	2
DN10	86	50	305	41		12	13
DN15	86	50	305	41	172.5	18	19
DN20	86	50	305	41		22	23
DN25	86	50	305	41		28	29
DN32	86	50	305	45	172.5	34	35
DN40	86	50	305	47		40	41
DN50	86	50	305	55		52	53
DN65	86	56	305	64	172.5	70	-
DN80	86	60	305	71		85	-
DN100	86	64	305	81	172.5	104	-
DN125	133	74	425	116	248	129	-
DN150	133	80	425	136	285	154	-
DN200	133	88	425	171	294	204	-

Inch 不锈钢气动焊接蝶阀
Pneumatic SS actuated welded butterfly valve

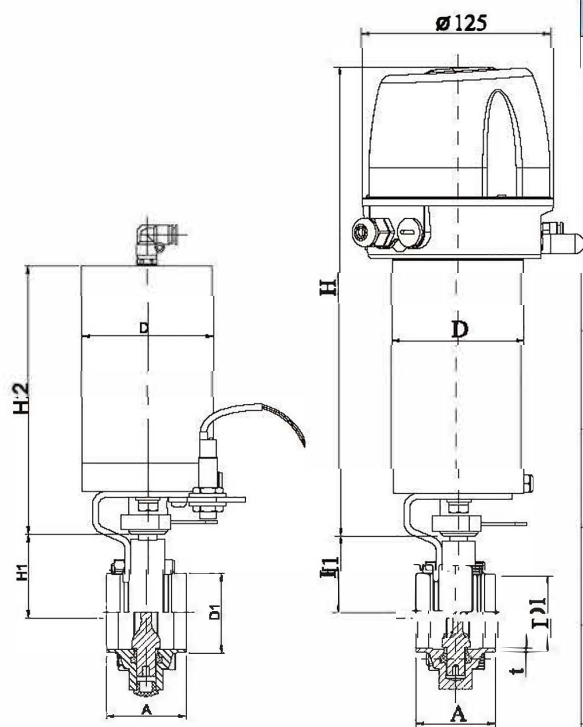


Part no:BUV024

BUV025

SIZE	D	A	H	H1	H	D1
1/2"	86	50	305	41		12.7
3/4"	86	50	305	41	172.5	19
1"	86	50	305	41		25.4
1 1/4"	86	50	305	41		31.8
1 1/2"	86	50	305	45	172.5	38.1
45	86	50	305	47		45
48	86	50	305	49		48
2"	86	50	305	53	172.5	50.8
57	86	50	305	55		57
2 1/2"	86	52	305	59		63.5
3"	86	56	305	66	172.5	76.2
3.5"	86	60	305	71		89
4"小	86	64	305	79		101.6
4"大	86	64	305	81	172.5	101.6
108	86	64	305	81		108
114	86	64	305	81		114.3
5"	133	80	425	116	248	127
133	133	80	425	116		133
6"	133	88	425	136		152.4
159	133	88	425	136	285	159
168.3	133	88	425	136		168.3
8"	133	88	425	171	295	203.2
219	133	88	425	171		219

蝶阀. BUTTERFLY VALVE

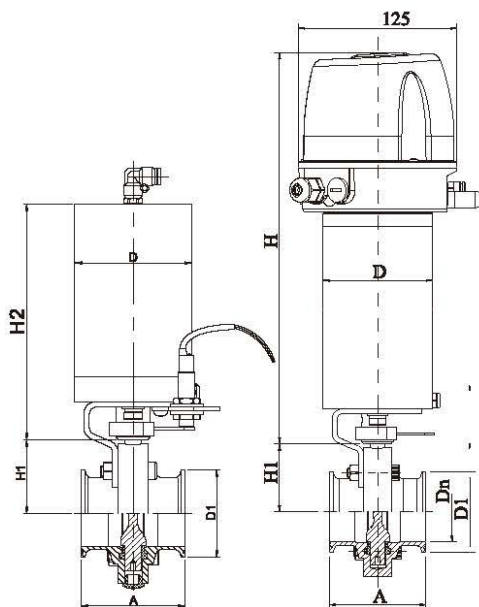


Part no:BUV026

BUV027

DIN 不锈钢气动卡箍蝶阀

Pneumatic SS actuated clamped butterfly valve

Size	Dn	D1	H	H1	H2	A
DN10	9	12	307.5	40	172.5	66
DN15	15	18	307.5	40	172.5	66
DN20	19	22	307.5	40	172.5	66
DN25	25	28	307.5	40	172.5	66
DN32	31	34	307.5	44.5	172.5	66
DN40	37	40	307.5	46.5	172.5	70
DN50	49	52	307.5	54.5	172.5	76
DN65	66	70	307.5	64	172.5	80
DN80	81	85	307.5	70.5	172.5	84
DN100	100	104	307.5	81	172.5	104
DN125	125	129	383	94.5	248	122
DN150	150	154	420	110	285	146
DN200	200	204	429	145	294	166

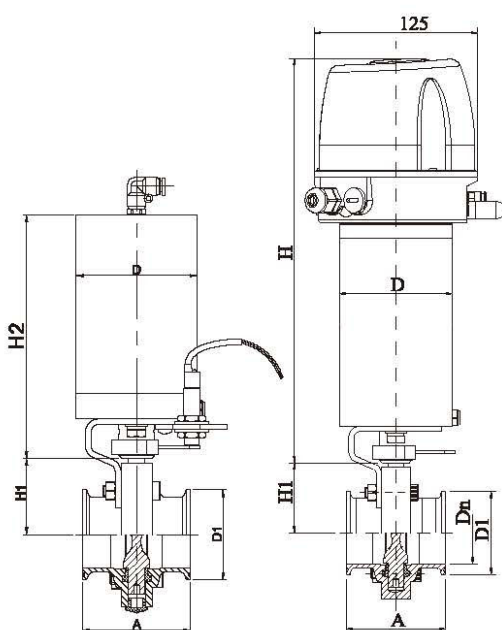

Part no:BUV028

BUV029

Inch 不锈钢气动卡箍蝶阀

Pneumatic SS actuated clamped butterfly valve

Size	Dn	D1	H	H1	H2	A
1/2"	9.7	12.7	307.5	40	172.5	66
3/4"	16.1	19.1	307.5	40	172.5	66
1"	22.4	25.4	307.5	40	172.5	66
1 1/4"	28.8	31.8	307.5	40	172.5	66
1 1/2"	35.1	38.1	307.5	44.5	172.5	66
Ø45	41	45	307.5	46.5	172.5	74
Ø48	45	48	307.5	48.5	172.5	76
2"	47.8	50.8	307.5	52.5	172.5	76
Ø57	53	57	307.5	54	172.5	76
2 1/2"	59.5	63.5	307.5	59	172.5	80
3"	72.2	76.2	307.5	65.5	172.5	84
3.5"	85	89	307.5	72	172.5	86
4"小	97.6	101.6	307.5	79	172.5	104
4"大	97.6	101.6	307.5	81	172.5	104
108	104	108	307.5	82.5	172.5	106
114.3	110.3	114.3	383	82.5	248	106
133	127	133	383	94.5	248	122
6"	146.8	152.4	420	110	285	146
159	153	159	420	110	285	146
8"	197.6	203.2	429	145	294	166
219	211	219	429	145	294	166
10"	247.2	254	429	174	294	166

蝶阀. BUTTERFLY VALVE

粉体蝶阀

Hygienic Power Tight Butterfly Valve

Application

This type of butterfly valves are ideally designed for powder dispensing systems in pharmaceutical, food and associated industries.

Simple to assemble and breakdown, for easy and thorough cleaning, the rotary valves provide sanitary


powder handling in situations where hygiene is essential.

Comprising of four parts (vane, 2 part valve body and connection/discharge collars) the valve is designed for easy connection to a range of powder processing equipment.

The valve vane is available in three variations:


- 1.A flexible silicone coated disc minimizes product damage during interruption and isolation of capsule or tablet flow
- 2.A stainless steel disc, designed for powder use, provides an air tight seal in the closed position for complete containment
- 3.A stainless steel star vane provides improved product flow and reduces buildups.

The valve body can be either clamped around the vane, using the specially designed clamp, or bolted. The connections/discharge collars can be clamped, welded or even connected by Tri-clamp to containers and process lines.

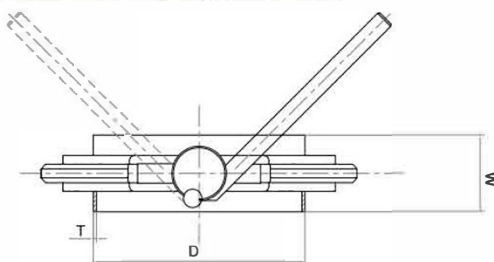


Part no:BUV030

Size	H	W	D	T
4"	230	54	Φ 102	2
6"	290	70	Φ 154	2
8"	356	75	Φ 206	3
12"	440	90	Φ 305	3.5

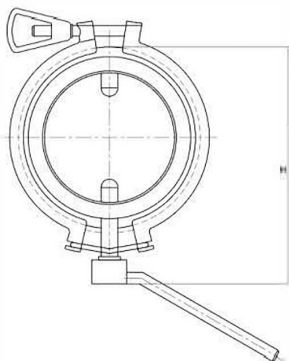

三通蝶阀 3 Way Linkage Butterfly Valve

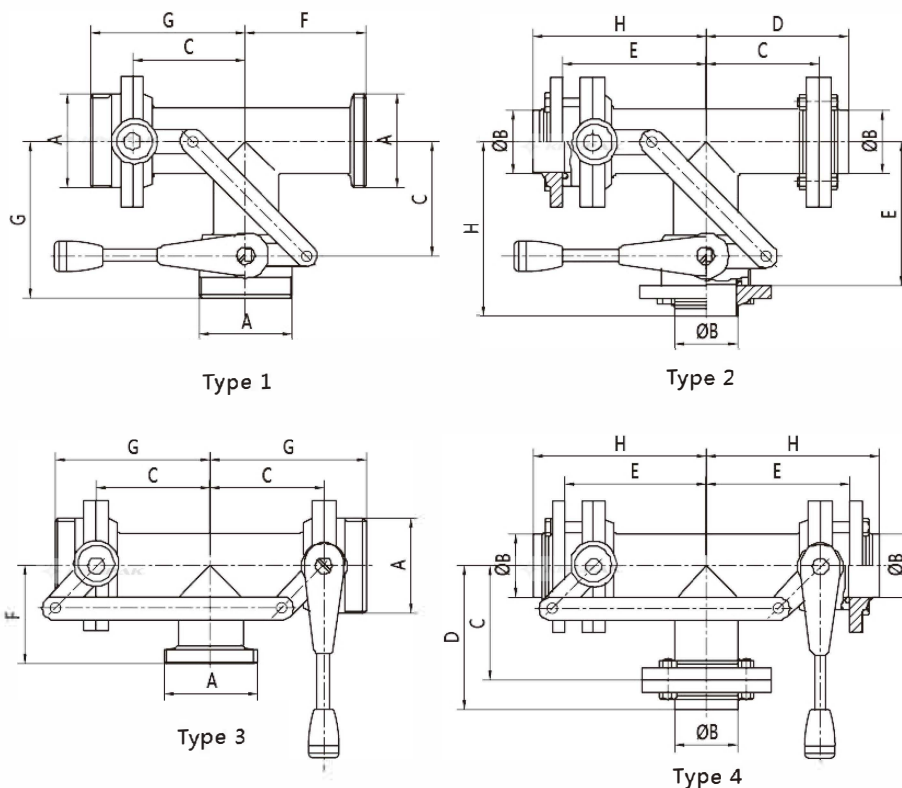

DIN


DN	A	B	C	D	E	F	G	H
DN20	RD44X1/6"	22/23X1.5	62	84	90	59	95	112
DN25	RD52X1/6"	28/29X1.5	72	94	100	72	106	122
DN32	RD58X1/6"	34/35X1.5	79	103	105	77	112	129
DN40	RD65X1/6"	40/41X1.5	84	108	110	82	118	134
DN50	RD78X1/6"	52/53X1.5	94	118	120	93	129	144
DN65	RD95X1/6"	70X2	105	130	130	105	141	155
DN80	RD110X1/4"	85X2	108	146	157	115	154	174
DN100	RD130X1/4"	100X2	120	160	167	130	169	190

Inch

Size	A		B	C	D	E	F	G	H
	SMS	3A							
1"	RD40X1/6"	37.13X8TPI ACME	45.72X8TPI WHIT	25.4X1.65	77	99	99	74	105
1.5"	RD60X1/6"	50.65X8TPI ACME	58.42X8TPI WHIT	38.1X1.65	94	118	110	93	118
2"	RD70X1/6"	64.16X8TPI ACME	72.72X6TPI WHIT	50.8X1.65	106	130	120	105	130
2.5"	RD85X1/6"	77.67X8TPI ACME	85.42X6TPI WHIT	63.5X1.65	130	155	148	132	155
3"	RD98X1/6"	99.19X8TPI ACME	98.12X6TPI WHIT	76.2X1.65	138	166	156	137	166
4"	RD125X1/4"	119.25X6TPI ACME	123.52X6TPI WHIT	101.6X2.11	180	210	198	180	210

DIN Clamp Ferrule


Part no:CF15



Size	A	C	D	T
DN15	34.0	18.0	18.0	1.5
DN20	34.0	22.0	18.0	1.5
DN25	50.5	28.0	21.5	1.5
DN32	50.5	34.0	21.5	1.5
DN40	50.5	40.0	21.5	1.5
DN50	64.0	52.0	21.5	1.5
DN65	91.0	70.0	28.0	2.0
DN80	106.0	85.0	28.0	2.0
DN100	119.0	104.0	28.0	2.0
DN125	145.0	129.0	28.0	2.0
DN150	167.0	154.0	28.0	2.0

Tri-clamp Ferrule Part no:CF16


3A-14WMP/14MMP/14AMP

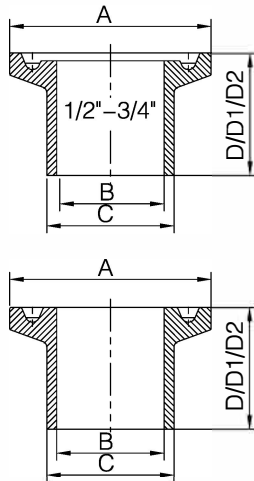

Size	A	B	C	D	D1	D2
1/2"	25.2	9.4	12.7	12.7	21.5	28.6
3/4"	25.2	15.75	19.05	12.7	21.5	28.6
1"	50.5	22.1	25.4	12.7	21.5	28.6
1 1/4"	50.5	28.5	31.8	12.7	21.5	28.6
1 1/2"	50.5	34.8	38.1	12.7	21.5	28.6
2"	64.0	47.5	50.8	12.7	21.5	28.6
2 1/2"	77.5	60.2	63.5	12.7	21.5	28.6
3"	91.0	72.9	76.2	12.7	21.5	28.6
4"	119.0	97.4	101.6	15.9	21.5	28.6
6"	166.8	146.8	152.4	22.2	21.5	38.1
8"	217.7	197.6	203.2	22.2	21.5	38.1
10"	268.5	248.4	254	22.2	21.5	38.1
12"	319.3	299.2	304.8	22.2	21.5	38.1


BS Ferrule SCH5/SCH 10

Part no:CF17




Size	D	D1	H	t (sch5)	t (sch10)
1/2"	21.34	50.5	21.5	1.65	2.11
3/4"	26.67	50.5	21.5	1.65	2.11
1"	33.4	50.5	21.5	1.65	2.77
1 1/4"	42.16	64	21.5	1.65	2.77
1 1/2"	48.26	64	21.5	1.65	2.77
2"	60.33	77.5	21.5	1.65	2.77
2 1/2"	73.03	91	21.5	2.11	3.18
3"	88.9	106	21.5	2.11	3.18
3 1/2"	101.6	119	21.5	2.11	3.18
4"	114.3	130	28	2.11	3.18
5"	141.3	155	28	2.11	3.40
6"	168.28	183	28	2.11	3.40
8"	219.09	233.5	28	2.11	3.76
10"	273.05	286	28	3.40	4.19

卡箍接头.CLAMP FERRULE




ISO/IDF Ferrule
Part no:CF18

Size	D	D1	H	t
1/2"	12.7	25.4	21.5	1.5/1.0
3/4"	19.1	25.4	21.5	1.5/1.0
1"	25.4	50.5	21.5	1.5/1.2
1 1/4"	31.8	50.5	21.5	1.5/1.2
1 1/2"	38.1	50.5	21.5	1.5/1.2
45	45	64	21.5	1.5
2"	50.8	64	21.5	1.5
57	57	77.5	21.5	2.0
2 1/2"	63.5	77.5	21.5	2.0
3"	76.2	91	21.5	2.0
3 1/2"	89	106	21.5	2.0
4"	101.6	119	21.5	2.0
108	108	119/130	21.5	2.0
114.3	114.3	130	21.5	2.0
133	133	155	28	2.0
159	159	183	28	3.0
204	204	217.4	28	2.0
219	219	233.5	28	3.0
254	254	268	28	2.0
304	304	319	28	2.0




BPE Ferrule
Part no:CF20

Size	A		B		C	
	In.	mm	In.	mm	In.	mm
1/4"	1.750	44.5	1.130	28.7	0.500	12.7
3/8"	1.750	44.5	1.130	28.7	0.500	12.7
1/2"	1.750	44.5	1.130	28.7	0.500	12.7
3/4"	1.750	44.5	1.130	28.7	0.500	12.7
1"	1.750	44.5	1.130	28.7	0.500	12.7
1 1/2"	1.750	44.5	1.130	28.7	0.500	12.7
2"	2.250	57.2	1.130	28.7	0.500	12.7
2 1/2"	2.250	57.2	1.130	28.7	0.500	12.7
3"	2.250	57.2	1.130	28.7	0.500	12.7
4"	2.250	57.2	1.130	28.7	0.625	15.9
6"	3.000	76.2	1.500	38.1	0.750	19.1




ISO1127 Ferrule
Part no:CF19

Size	D	D1	H	t
21.3	21.3	50.5	21.5	1.6
26.9	26.6	50.5	21.5	1.6
33.7	33.7	50.5	21.5	2.0
42.4	42.4	64	21.5	2.0
48.3	48.3	64	21.5	2.0
60.3	60.3	77.5	21.5	2.0
76.2	76.1	91	21.5	2.0
88.9	88.9	106	28	2.0
114.3	114.3	130	28	2.0
139.7	139.7	155	28.0	2.0
168.3	168.3	183	28.0	3.6
219.1	219.1	233.5	28.0	3.6



Expanding Ferrule
Part no:CF21

Size	D	D1	H
1"	29.5	50.5	19.1
1 1/2"	42.5	50.5	28.6
2"	55.7	64	33.3
2 1/2"	68.8	77.5	34.9
3"	82	91	36.5
4"	108	119	38.1

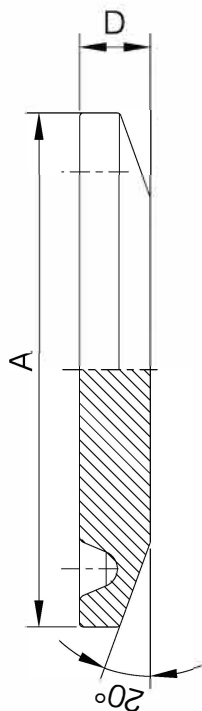

DIN Blank


Part no:CF22

Size	A	D
DN15	34.0	5.0
DN20	34.0	5.0
DN25	50.5	6.3
DN32	50.5	6.3
DN40	50.5	6.3
DN50	64.0	6.3
DN65	91.0	6.3
DN80	106.0	6.4
DN100	119.0	7.9
DN125	145.0	10.5
DN150	167.0	10.5

16A Solid end cap


Part no:CF23

Size	A	D
1/2"-3/4"	25.2	5.0
A37	34.0	6.3
1-1.5"	50.5	6.3
2"	64.0	6.3
2.5"	77.5	6.3
3"	91.0	6.3
4"	119.0	7.9
6"	166.8	11.1
8"	217.7	11.1
10"	268.5	11.1
12"	319.3	11.1




Tri-clamp Plain gasket
Part no:CF24

Size	D1	H
1/2"	20.3	5
3/4"	20.3	5
1"	50.5	5
1 1/2"	50.5	5
2"	64	5.5
2 1/2"	77.5	5.5
3"	91	5.5
3 1/2"	106	5.5
4"	119	5.5
4 1/2"	130	5.5
5"	144.5	5.5
φ 133	155	5.5
6"	167	5.5
φ 169	183	5.5
8"	217.4	5.5
φ 219	233.5	5.5
10"	268	5.5
12"	319	5.5



DIN Tri-clamp gasket
Part no:CF25

Size	D1	H
DN10	34	5
DN15	34	5
DN20	34	5
DN25	50.5	5
DN32	50.5	5
DN40	50.5	5
DN50	64	5.5
DN65	91	5.5
DN80	106	5.5
DN100	119	5.5
DN125	144.5	5.5
DN125	155	5.5
DN150	167	5.5
DN150	183	5.5
DN200	217.4	5.5
DN200	233.5	5.5
DN250	268	5.5
DN300	319	5.5



Lipped gasket 13PG
Part no:CF26


Size	A	B
1.0"	22.8	52.7
1.5"	35.8	52.7
2.0"	48.8	66.2
2.5"	60.5	79.7
3.0"	73.1	93.2
4.0"	97.8	121.2
6.0"	148	169.1
10"	249	270.7
12"	300	321.5



EPDM, Silicone, NBR, PTFE, Viton, Nitrile



seal with screen(60-200mesh)

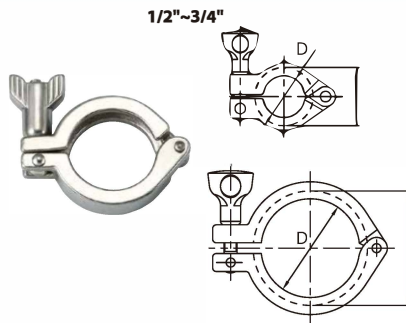


13MHH heavy duty single pin clamp

Part no:CL01

Size	D
1/2"-3/4"	28
1"-1 1/2"	53.6
2"	67
2.5"	80.6
3"	94.2
3.5"	109.2
4"	122.2
4.5"	133.2
5"	149
133	159
6"	170.4
159	187
8"	220
219	238
10"	272
12"	323

Part no:CL02


Size	D
DN10-20	37
DN25-40	53.6
DN50	67
DN65	94.2
DN80	109.2
DN100	122.2
DN125	149
DN125	159
DN150	170.4
DN150	187
DN200	220
DN200	238
DN250	272
DN300	323



13SF Heavy Duty Double pin Clamp

Part no:CL03


SIZE	D	B
1/2"~3/4"	20	28
A37	27.5	42.9
1"~1.5"	45	53.6
2"	59	72
2.5"	67	84
3"	85	98
4"	114	127



13MHHM double pin Clamp

Part no:CL04


SIZE	D	B
1/2"~3/4"	20	28
1"~1.5"	43.6	53.6
2"	57	67
2.5"	70.6	80.6
3"	84	94
4"	112	122
6"	155	170
8"	205	220.8



13MHP Bolted High Pressure Clamp


Part no:CL05

SIZE	B	D
1/2"~3/4"	20	28
1"~1.5"	43.3	52
2"	56.4	65.5
2.5"	69.5	79
3"	77.6	92.5
4"	108.8	120.5
6"	158	170
6.5"	173	186.2
8"	222.5	237.5
10"	258.2	272.8
12"	309	327.6





13MHHS 3-Piece Clamp
Part no:CL06

SIZE	D	B
1"~1.5"	54	80
2"	67.5	94
2.5"	80.9	109
3"	94	126
4"	122.4	154
12"	323.4	369




13CS Double pin Clamp
Part no:CL07

SIZE	D	B
1/2"~3/4"	20.6	28.3
DN10-20	27.2	37
1.5"	41.02	53.5
DN25-40	44.5	54.5
2.0"	54.5	67
DN50	57	68
2.5"	68	80.5
3.0"	81.5	94
DN65	84	95
DN80	99	110
4.0"	109.5	122
DN100	112	123
DN115	123	134
DN125	144	159
6.0"	157.6	175.1
DN150	172	187
8.0"	207.4	225.9
DN200	222.5	237.5
DN250	257	272
DN300	308	323




Pipe holder with solid bar/BSP socket
Part no:CL08

Size	D
1"	25.4
1 1/4"	31.8
1 1/2"	38.1
2"	50.8
2 1/2"	63.5
3"	76.2
3 1/2"	89
4"	101.6














13IS I-Line Clamp
Part no:CL09

SIZE	D	B
1.0"~1.5"	44.4	53.4
2.0"	57.8	72.2
2.5"	71.4	88.1
3.0"	84	102.4
4.0"	110	127.8
6.0"	155.4	195.3





13IU Bolted Clamp
Part no:CL10

SIZE	D	B
1"~1.5"	45	55
2.0"	63	73
2.5"	74	89
3.0"	88	102
4.0"	111	128




管支架.PIPE HANGER

Weld: TH01A Threaded:TH01B



Part no:TH01

Size	A	L
1"	25.4	66
1 1/2"	38.1	79
2"	50.8	90
2 1/2"	63.5	105
3"	76.3	120
4"	101.6	146





ISO Hexagon tube hanger

Part no:TH02


Size	A	B	L
ISO21.3	21.3	48	68
ISO26.9	26.6	55	74
ISO33.7	33.7	63	82
ISO42.4	42.4	74	93
ISO48.3	48.3	82	101
ISO60.3	60.3	95	114
ISO88.9	88.9	130	149
ISO114.3	114.3	158	177

3A Hexagon tube hanger with Rubber insert or PVC sleeve
Part no:TH03



Size	D	L
1"	25.4	87
1 1/2"	38.1	101.6
2"	50.8	114.3
2 1/2"	63.5	120.6
3"	76.2	139.7
4"	101.6	171.4


Bolted Pipe Clip C/W Blue Insert Bossed Type

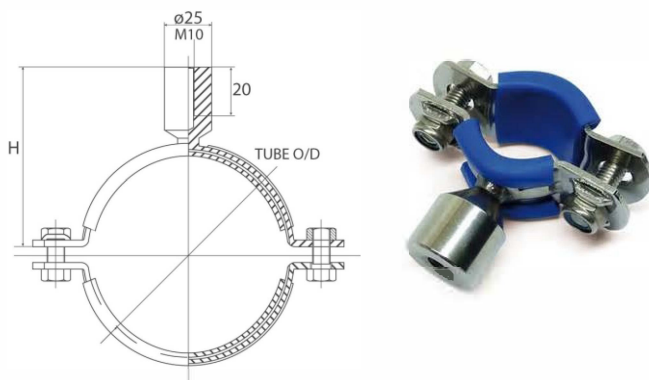

Part no:TH04

Size	Tube O/D	H (mm)
1/2"	12.7	40.4
3/4"	19	45.5
1"	25.4	47.7
1.1/2"	38	54
2"	50.8	60.4
2.1/2"	63.5	66.8
3"	76	73
4"	101.6	85.8
5"	129	99.5
6"	154	115
8"	204	130
10"	254	162
12"	304	187


Bolted Pipe Clip C/W Blue Insert Weld Type

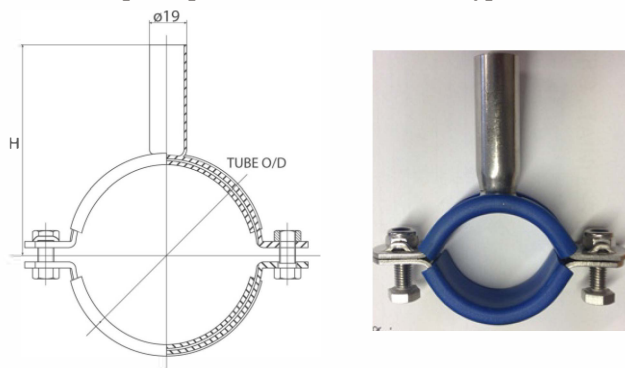

Part no:TH05

Size	Tube O/D	H (mm)
1/2"	12.7	90
3/4"	19	90
1"	25.4	90
1.1/2"	38	90
2"	50.8	90
2.1/2"	63.5	90
3"	76	90
4"	101.6	90
5"	129	129
6"	154	135
8"	204	155
10"	254	180
12"	304	205

Tube hanger with insert

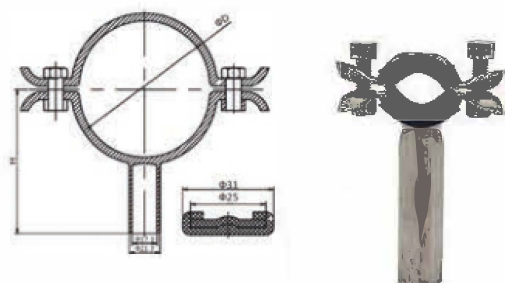


Part no:TH06

Size	Tube O/D	H (mm)
1/2"	12.7	90
3/4"	19	90
1"	25.4	90
1.1/2"	38	90
2"	50.8	90
2.1/2"	63.5	90
3"	76	90
4"	101.6	90
5"	129	125
6"	154	135
8"	204	145
10"	254	174
12"	304	200


管支架.PIPE HANGER

Hinged pipe clip

Part no:TH07A

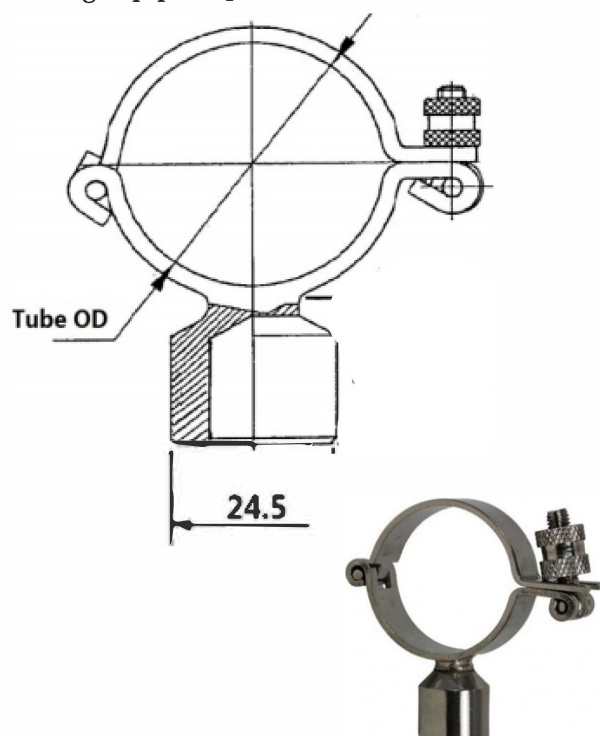



Bolted Saddle Clip with BSP Socket
Part no:TH07B

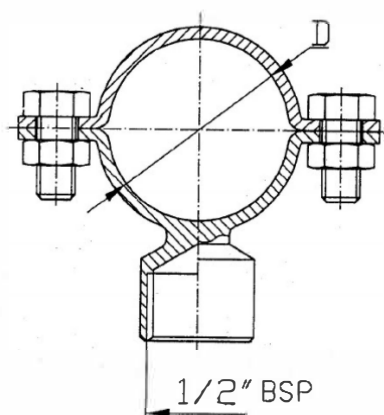

Size	D	H
1/2"	12.7	35.85
3/4"	19.1	39
1/2"NB	21.3	40.15
1"	25.4	42.2
3/4"NB	26.7	42.85
1 1/4"	32	45.5
1"NB	33.4	46.2
1 1/2"	31	48.55
1 1/4"NB	42.2	50.6
1 1/2"NB	48.3	53.65
2"	50.8	55
2"NB	60.3	59.65
2 1/2"	63.5	62
2 1/2"NB	73	66.5
3"	76.2	68
3"NB	89	74.5
4"	102	82
4"NB	114	88
5"	129	101.5
6"	154	114
6"NB	168	122
8"	204	139
10"	254	164
12"	304.8	189



管支架.PIPE HANGER

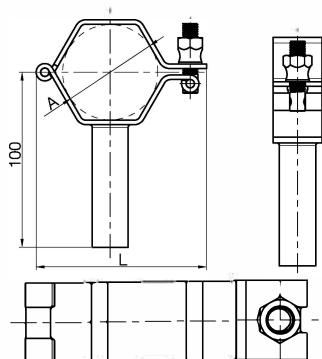

Hexagon pipe holder

Part no:TH08

Size	A	L
DIN28	28	64
DIN34	34	64
DIN40	40	78
DIN52	52	90
DIN70	70	111
DIN85	85	125
DIN101.6	101.6	152

Size	A	L
SMS25	25	61
SMS38	38	76
SMS51	51	90
SMS63.5	63.5	106
SMS76	76	120
SMS104	104	152


Round pipe hanger(with base)

Part no:TH09

Size	D	D1	L	H	T
1/4"	8	6.2	12	47	1.5
1/2"	8	12.5	12	47	1.5
3/4"	19	19	25	47	1.5
1"	19	25.4	25	47	1.5
1 1/2"	19	38.1	25	47	1.5
2"	19	50.8	25	47	1.5
2 1/2"	19	63.5	25	47	2
3"	19	76.2	25	47	2
4"	19	101.6	28	47	2
5"	19	129	28	47	2.5
6"	19	154	28	47	2.5
8"	25	204	35	47	3
10"	25	254	35	47	3
12"	25	304	35	47	3



管支架.PIPE HANGER

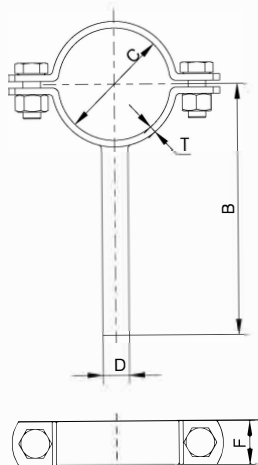

Round tube hanger with solid bar
Part no:TH10

Size	B	D	C	F	T
DN10	63	8	12	14	2.0
DN15	66	8	18	14	2.0
DN20	68	8	22	16	2.0
DN25	71	10	28	16	2.0
DN32	74	10	34	16	2.0
DN40	77	10	40	20	2.0
DN50	83	12	52	20	2.0
DN65	92.5	12	70	20	2.5
DN80	100	12	85	25	2.5
DN100	110	12	104	25	3.0
DN125	140	16	129	25	3.0
DN150	152.5	16	154	30	3.0



Size	B	D	C	F	T
ISO 32(1 1/4")	78	10	42.4	16	2.0
ISO 40(1 1/2")	81.5	12	48.3	20	2.0
ISO 50(2")	88	12	60.3	20	2.5
ISO 80(3")	102	12	88.9	25	2.5
ISO 100(4")	115	12	114.3	25	3.0
ISO 125(5")	145	16	139.7	25	3.0
ISO 150(6")	160	16	168.3	30	3.0
ISO 200(8")	186	20	219.1	30	4.0

Size	B	D	C	F	T
SMS25.4	69.5	10	25	16	2.0
SMS38.1	76	10	38	20	2.0
SMS50.8	82.5	12	51	20	2.0
SMS63.5	89.5	12	63.5	20	2.5
SMS76.2	95.5	12	76	25	2.5
SMS101.6	109	16	101.6	25	3.0



卫生级球阀.SANITARY BALL VALVE

三片式全包无滞留球阀

Three Piece Full Encapsulated Seat Ball Valve

应用Application

此类型球阀是一款卫生级的阀门，用于高粘度物料的传送和控制。
广泛应用于食品，饮料加工，以及制药和化学工业领域

This ball valve is hygienic design, with Encapsulated PTFE seal. Suitable for transporting high viscosity materials.

The valves are widely used in food & beverage processing, pharmaceutical, chemical fields.

设计特点Features

- Full port design
- Balanced encapsulated construction minimizes cold flow
- Precision stainless steel balls reduce torque and friction losses while extending service life
- Lockable handle can prevent accidental actuation
- Integral ISO 5211 mounting pad
- Sizes are available from 1/2"/DN15 to 4"/DN100
- Connection: Welding, Clamp, Threaded



材质Material

Valve body: CF8M or Cf8

Seat: PTFE (Hard sealing)

技术参数：Technical data


Max. pressure: 10Bar (DN15-DN65/ 1/2"-2 1/2")

8Bar (DN80-DN100/ 3"-4")

Working temperature: -20°C to + 150°C (PTFE)




卫生级球阀.SANITARY BALL VALVE

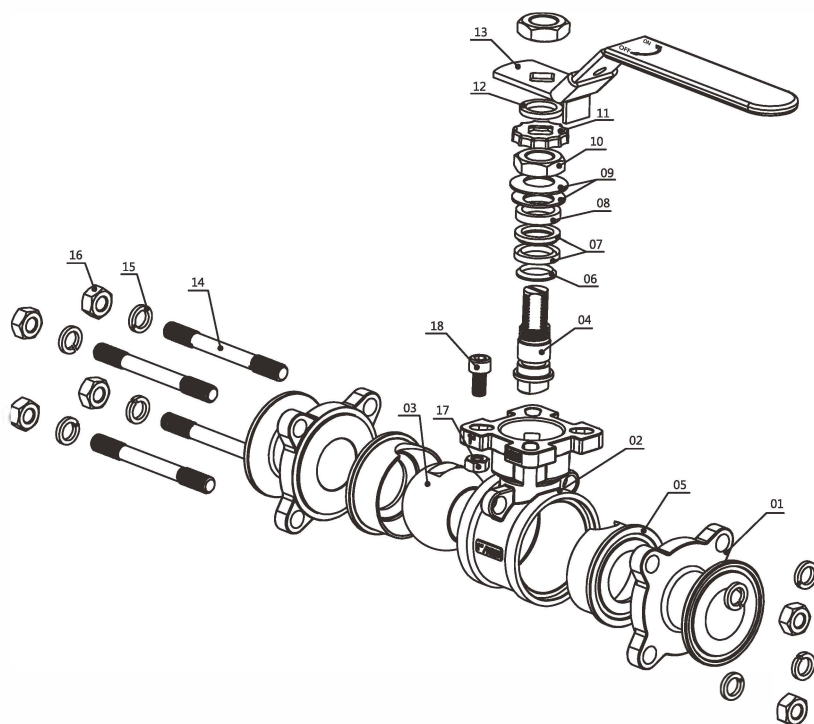

No.	Description	Material
01	Valve Cap	CF8/CF3M
02	Valve Body	CF8/CF3M
03	Ball Core	304/316L
04	Valve Stem	304/316L
05	Body Seal	PTFE
06	Washer Gasket	PTFE
07	V-seal components	PTFE
08	Gasket	304
09	Spring Gasket	304
10	Nut	304
11	Stopper Ring	304
12	Gasket	PTFE
13	Pull Handle	304
14	Bolt	304
15	Spring Washer	304
16	Nut	304
17	Nut	304
18	Bolt	304

球阀压力-温度曲线图
Pressure And Temperature Curve

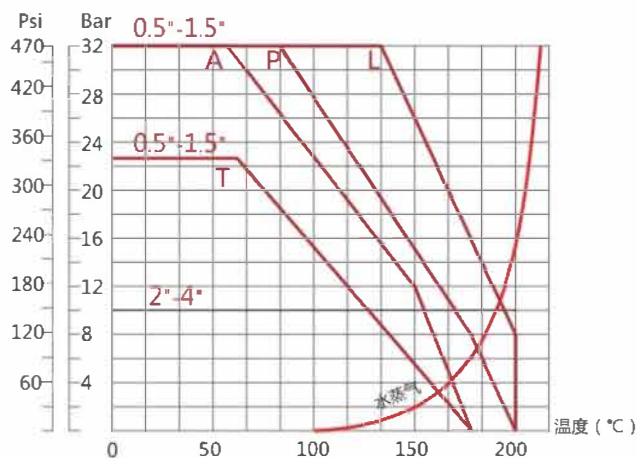

T:PTFE
P:C+PTFE
A:PTFE(TFMTM)
L:PTFE(Virgin peek@)


说明：测试条件，介质水
Note: test under water

三片式全球阀扭矩表
THE N.M OF 3 PC FULL PACKAGE BALL VALVE

SIZE	1/2" -3/4"	1" /DN25	1.25" /DN32	1.5" /DN40	2" /DN50	2.5" /DN65	3" /DN80	4" /DN100
扭矩N.M	6	10	12	14	20	40	75	110

选择执行器时建议增加20%安全余量
Advice: increasing 20% Safety Margin When Selecting Actuators


卫生级球阀.SANITARY BALL VALVE

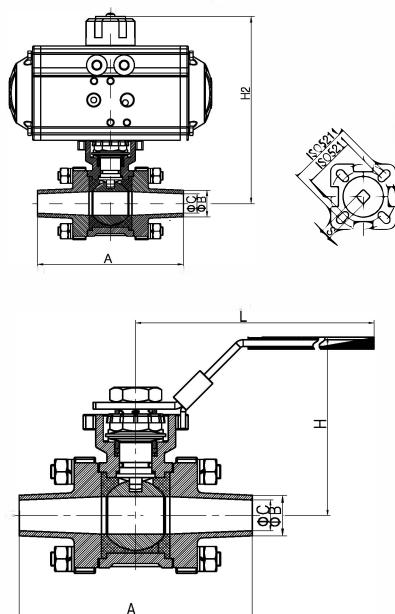

Sanitary 3-pc Ball Valve with Welded Ends
Part no.BAV01

Size	A	B	C	H	H2	L	ISO5211
DN15	90	18	15	60.5	128	132	F04
DN20	102	22	19	64.5	134.5	132	F04
DN25	115	28	25	78	144	165	F04
DN32	125	34	31	87	152.5	170	F04
DN40	140	40	37	98	179.5	194	F05
DN50	156	52	49	107	198.5	194	F05
DN65	170	70	66	130	222.5	252	F07
DN80	197	85	81	153	249.5	252	F07
DN100	242	104	100	162	297	332	F10
1/2"	90	12.7	9.4	60.5	128	132	F04
3/4"	102	19.05	15.8	64.5	134.5	132	F04
1"	115	25.4	22.1	78	144	165	F04
1 1/4"	125	31.8	28.5	87	152.5	170	F04
1 1/2"	140	38.1	35	98	179.5	194	F05
2"	156	50.8	47.5	107	198.5	194	F05
2 1/2"	170	63.5	60.2	130	222.5	252	F07
3"	197	76.2	72.9	153	249.5	252	F07
4"	242	101.6	95	162	297	332	F10

Sanitary 3-pc Ball Valve with Clamped Ends
Part no.BAV02

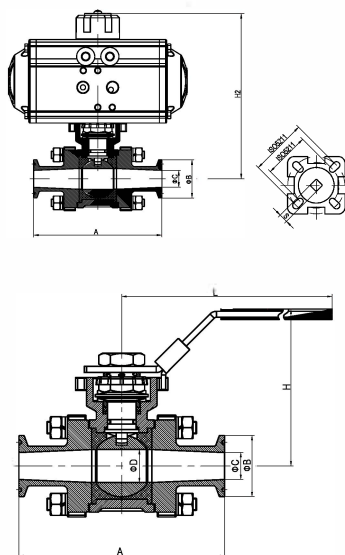

Size	A	B	C	H	H2	L	ISO5211
DN15	90	34	15	60.5	128	132	F04
DN20	102	34	19	64.5	134.5	132	F04
DN25	115	50.5	25	78	144	165	F04
DN32	125	50.5	31	87	152.5	170	F04
DN40	140	50.5	37	98	179.5	194	F05
DN50	156	64	49	107	198.5	194	F05
DN65	170	91	66	130	222.5	252	F07
DN80	197	106	81	153	249.5	252	F07
DN100	242	119	100	162	297	332	F10
1/2"	90	25.4	9.4	60.5	128	132	F04
3/4"	102	25.4	15.8	64.5	134.5	132	F04
1"	115	50.5	22.1	78	144	165	F04
1 1/4"	125	50.5	28.5	87	152.5	170	F04
1 1/2"	140	50.5	35	98	179.5	194	F05
2"	156	64	47.5	107	198.5	194	F05
2 1/2"	170	77.5	60.2	130	222.5	252	F07
3"	197	91	72.9	153	249.5	252	F07
4"	242	119	95	162	297	332	F10

卫生级球阀.SANITARY BALL VALVE


卫生级直通球阀，三通球阀（普通款） Sanitary 2-Way&3-Way Ball Valve

设计和特点

无需维护
比其他的阀门更小更轻
操纵扭矩小
垫圈根据PTFE FDA 177.2600
无论流体是何种流向，手柄可以安装在侧边的阀体上
无论是何种连接方式，阀体都可进行更换，而不会改变阀门的总长度
连接：螺纹，焊接，卡箍，法兰，DIN
可装配气动执行器，电动执行器
物料接触部位 AISI 304/316L，其它部位 AISI 304
三通球阀球芯类型：T型、L型


Design and features

Free of maintenances
Compact and portable
Small operating torque
Gasket complies with PTFE FDA 177.2600
Hand lever can be installed on the side of the valve body, no matter of the flow direction.
Connection ends: thread, clamp, weld,
It can match with pneumatic and electric actuators.
Material for the part contacted with media is AISI 304/316L. Other part is AISI 304
Type of cores: T type, L type



卡箍直通球阀Clamped 2 Way Ball Valve
Part no:BAV03


size	A	B	H	L
1/2"	75	25.2	53	111
3/4"	100	25.2	55	114
1"	120	50.5	55	140
1 1/4"	130	50.5	55	140
1 1/2"	140	50.5	65	160
2"	164	64	75	175
2 1/2"	189	77.5	85	230
3"	212	91	100	246
4"	260	119	120	333



卡箍无滞留球阀Clamped Non-resort Ball Valve
Part no:BAV04

Size	A	B	H	L
3/4"	100	50.5	65	105
1"	110	50.5	70	105
1 1/4"	120	50.5	80	130
1 1/2"	140	50.5	80	150
2"	164	64	85	160
2 1/2"	180	77.5	110	180
3"	190	91	130	200
4"	220	119	155	230

卡箍3通球阀Clamped 3 way Ball Valve
Part no:BAV05

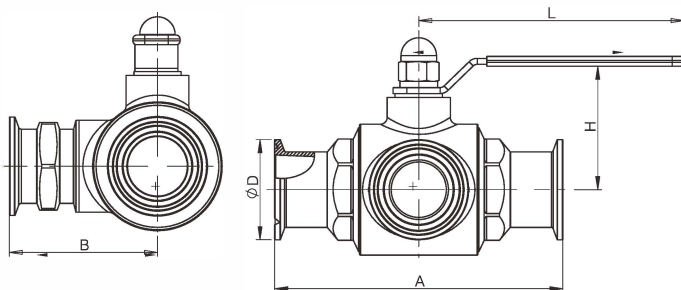


size	A	B	D	H	L
3/4"	101	55	25.2	55	120
1"	120	61	50.5	55	132
1 1/4"	130	60.5	50.5	60	136
1 1/2"	153	73	50.5	65	160
2"	164	84	64	65	178
2 1/2"	200	101	77.5	100	225
3"	210	105	91	110	250
4"	260	132	119	140	300

卫生级球阀.SANITARY BALL VALVE


卫生级直通球阀，三通球阀

Sanitary Direct Way&3-Way Ball Valve




Tri-clamp Direct Way Ball Valve
Part no:BAV06

Size	D	d	L	H
1/2"	25	10	88	29
3/4"	50.5	15.75	108	41
1"	50.5	22.1	112	48
1 1/4"	50.5	28.5	125	54
1 1/2"	50.5	34.8	135	59
2"	64	47.5	160	68
2 1/2"	77.5	60.2	178	78
3"	91	72.9	229	100
DN15	34	15	108	41
DN20	34	19	108	41
DN25	50.5	25	112	48
DN32	50.5	31	125	54
DN40	50.5	37	135	59
DN50	64	49	160	68
DN65	91	66	178	78




Threaded Direct Way Ball Valve
Part no:BAV07

Size	D	d	L	H
DN15	Rd34x1/8	15	88	29
DN20	Rd44x1/6	19	108	41
DN25	Rd52x1/6	25	112	48
DN32	Rd58x1/6	31	125	54
DN40	Rd65x1/6	37	135	59
DN50	Rd78x1/6	49	160	68
DN65	Rd95x1/6	66	178	78
DN80	Rd110x1/4	81	178	78



Tri-clamp Three-way Ball Valve
Part no:BAV08

Size	D	d	L	L1	H
1/2"	25	10	88	44	29
3/4"	50.5	15.75	108	54	41
1"	50.5	22.1	112	56	48
1 1/4"	50.5	28.5	125	62.5	54
1 1/2"	50.5	34.8	135	72.5	59
2"	64	47.5	160	80	68
2 1/2"	77.5	60.2	178	89	78
3"	91	72.9	229	114.5	100



T type ball core

A inlet
90 rotation direction



90 rotation direction




L type ball core

A inlet
90 rotation direction




B, C switch inlets
90 rotation direction

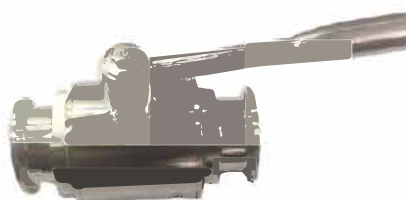


卫生级球阀.SANITARY BALL VALVE

蝶式球阀Butterfly Type Ball Valve

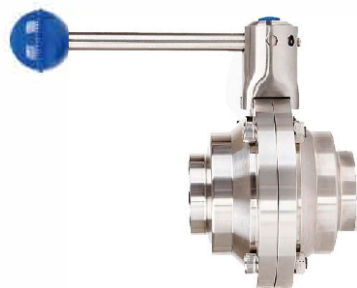


焊接蝶式球阀
Welded Butterfly Type Ball Valve
Part no:BAV09




Size	A	B	L	KxK
1"	72	25.4	126	8x8
1 1/4"	80	31.8	126	8x8
1 1/2"	84	38.1	133	10x10
2"	98	50.8	144	10x10
2 1/2"	116	63.5	160	11x11
3"	132	76.2	220	11x11
4"	164	101.6	284	14x14
DN25	72	28/29	126	8x8
DN32	80	34/35	126	8x8
DN40	84	40/41	133	10x10
DN50	98	52/53	144	10x10
DN65	120	70	160	11x11
DN80	140	85	220	11x11
DN100	164	104	284	14x14

卡箍蝶式球阀
Clamped Butterfly Type Ball Valve
Part no:BAV10



Size	A	C	L	KxK
1"	72	50.5	126	8x8
1 1/4"	80	50.5	126	8x8
1 1/2"	84	50.5	133	10x10
2"	98	64	144	10x10
2 1/2"	116	77.5	160	11x11
3"	132	91	220	11x11
4"	164	119	284	14x14
DN25	72	50.5	126	8x8
DN32	80	50.5	126	8x8
DN40	84	50.5	133	10x10
DN50	98	64	144	10x10
DN65	120	91	160	11x11
DN80	140	106	220	11x11
DN100	164	119	284	14x14

DIN螺纹式蝶式球阀DIN threaded Ball Valve
Part no:BAV11



Size	Dn	Rd	L	L1	H	KXK
DN15	15	Rd34x1/8	70	143	60	8x8
DN20	19	Rd44x1/6	70	143	60	8x8
DN25	25	Rd52x1/6	85	143	68	8x8
DN32	31	Rd58x1/6	85	143	68	8x8
DN40	38	Rd65x1/6	100	143	75	10x10
DN50	49	Rd78x1/6	102	143	85	10x10
DN65	66	Rd95x1/6	125	143	107	11x11
DN80	81	Rd110x1/4	135	186	117	11x11
DN100	100	Rd130x1/4	170	215	140	14x14

SMS螺纹蝶式球阀SMS Threaded Ball Valve
Part no:BAV12

Size	Dn	Rd	L	L1	H	KXK
19	15.8	Rd34x1/8	70	143	60	8x8
32	22.4	Rd48x1/6	85	143	60	8x8
38	28.8	Rd60x1/6	85	143	68	8x8
51	35.1	Rd70x1/6	100	143	68	10x10
63	47.8	Rd85x1/6	102	143	85	10x10
76	60.5	Rd98x1/6	125	143	107	11x11
89	73.2	Rd110x1/6	135	186	117	11x11
101.6	97.6	Rd125x1/4	170	215	140	14x14

卫生级球阀.SANITARY BALL VALVE

罐底全包球阀Tank Bottom Ball Valve

工作原理Working Principle

罐底球阀配有特殊罐底连接法兰，用于焊接在反应罐或容器底部，其端部轮廓和半径具有有效的重力排放作用，平滑的锥形孔和罐内超近距离的球体可防止介质在阀门入口处堆积，确保排泄畅通

The tank bottom valve is welded flush to the bottom of tank ,providing a fast,unrestricted discharge of medium.

The weld-in-one piece tank pas is designed to bolt derectly to the valve body center.

FEATURES

- Full port design
- Integral ISO 5211 mounting pad
- 1000 psi WOG
- Lockable handle can prevent accidental actuation
- Sizes are available from 1/2"/DN15 to 4"/DN100
- Connection: Welding, Clamp, Flange or others upon request

MATERIAL

Valve body: CF8 or CF8M
Valve seat: PTFE

TECHNCIAL SPECIFICATIONS



Max. pressure: 10Bar (DN15-DN65/ 1/2"-21/2")
8Bar (DN80-DN100/ 3"-4")
Working temperature: -20°C to + 150°C (PTFE)

- Automatic operation : pneumatic stainless steel actuator (vertical type), pneumatic aluminum actuator (horizontal type) and electric actuator

NC operated: normally closed (fail closed)---air to open, spring to close

NO operated: normally open (fail open)---air to close, spring to open

AA operated: double acting---air to open, air to close

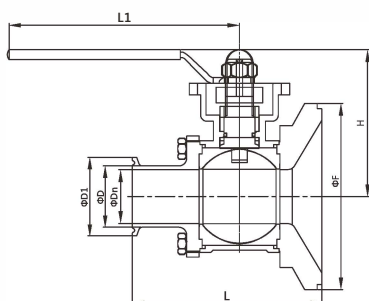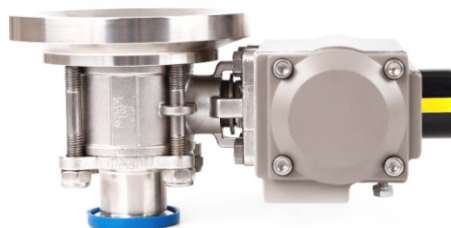

Tank Bottom 3-pc non-retention Ball Valve
Part no:BAV13

Size	Dn	D	D1	F	L	L1	H
1"	22.1	25.4	50.5	120	106	170	78
1 1/2"	34.8	38.1	50.5	120	125	173	98
2"	47.5	50.8	64	150	140	173	107
2 1/2"	60.2	63.5	77.5	180	155	223	130
3"	72.9	76.2	91	212	176	335	163
4"	87.4	101.6	119	248	210	335	169
DN25	25	28	50.5	120	106	170	78
DN40	37	40	50.5	120	125	173	98
DN50	49	52	64	150	140	173	107
DN65	66	70	91	180	155	223	130
DN80	81	85	106	212	176	335	163
DN100	100	104	119	248	210	335	169

止回阀.CHECK VALVE



应用 Application

止回阀是一种阻止流体回流的阀门，保证流向唯一性。它可用于保护流体回吸的损失，防止管道液击。广泛应用到食品，饮料，酿酒，炼油，化妆品，制药等行业

Check valve is used to prevent fluid from flowing back and ensures to flow in only one direction. Suitable for low and medium viscosity fluids.

操作原理 operating principle

当流体的压力大于弹簧的抽吸压力时，阀门打开。当两种压力相当时，阀门关闭。更强大的压差也可以使阀门关闭。

The valve opens when pressure of fluid exceeds to the pressure of spring.

The valve closes when the pressures are equal.

材质 Materials

All parts welded with fluids are made of Ss304 or SS316L

Seal: EPDM or VITON

技术规范 Technical data

最大压力 Max pressure: 10bar

开启压力 Opening pressure: 0.3bar (DN25)

0.2bar (DN32-DN40)

0.1bar (DN50-DN100)

工作温度 Working Temp: -10℃ to +120℃ (EPDM)

连接方式: 焊接, 卡箍, 螺纹


Connection end: Butt-weld, Tri-clamp, Threaded

Norms: 3A, DIN, SMS, RJT, ISO

止回阀.CHECK VALVE

DIN Welded Check Valve

Part no:CKV01

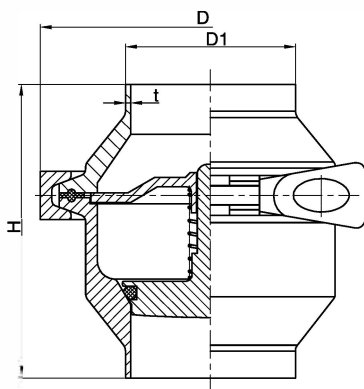

Size	H	D	D1	t
DN15	70	76.5	18	1.5
DN20	70	76.5	22	1.5
DN25	70	76.5	28	1.5
DN32	70	87	34	1.5
DN40	70	87	40	1.5
DN50	80	100	52	1.5
DN65	90	115	70	2.0
DN80	100	128	85	2.0
DN100	100	164	104	2.0


INCH Welded Check Valve

Part no:CKV02

Size	H	D	D1	t
1/2"	70	76.5	12.7	1.65
3/4"	70	76.5	19.05	1.65
1"	70	76.5	25.4	1.65
1 1/4"	70	87	31.7	1.65
1.5"	70	87	38.1	1.65
2"	90	100	50.8	1.65
2.5"	98	115	63.5	1.65
3"	106	128	76.2	1.65
4"	110	164	101.6	2.1

DIN Clamped Check Valve

Part no:CKV03

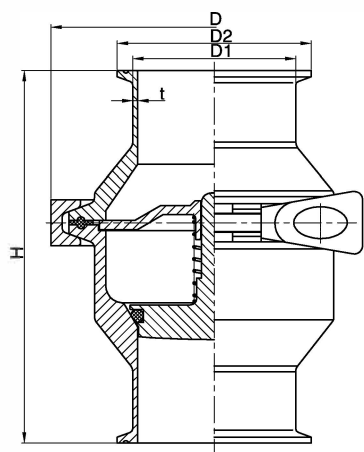


Size	H	D	D2	Dn
DN15	70	76.5	34	15
DN20	70	76.5	34	19
DN25	70	76.5	50.5	25
DN32	70	87	50.5	31
DN40	70	87	50.5	37
DN50	90	100	64	49
DN65	98	115	91	66
DN80	106	128	106	81
DN100	110	164	119	100

Inch Clamped Check Valve

Part no:CKV04

Size	H	D	D2	Dn
1/2"	81	76.5	25.4	9.4
3/4"	81	76.5	25.4	15.8
1"	95.5	76.5	50.5	22.1
1 1/4"	95.5	87	50.5	28.4
1.5"	95.5	87	50.5	34.8
2"	115.5	100	64	47.5
2.5"	123.5	115	77.5	60.2
3"	131.5	128	91	72.9
4"	141.5	164	119	97.4

DIN螺纹式止回阀/DIN Threaded Check Valve
Part no:CKV05

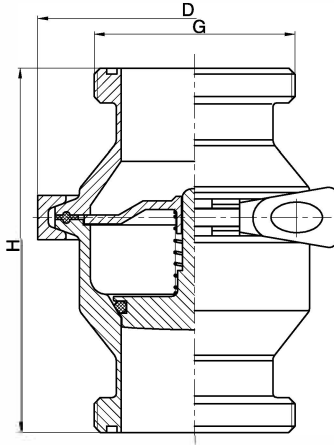


Size	H	D	G
DN25	114	76.5	RD52x1/6
DN40	114	87	RD65x1/6
DN50	135	100	RD78x1/6
DN65	148	115	RD95x1/6
DN80	155	128	RD130x1/4
DN100	170	164	RD130x1/4

SMS螺纹式止回阀/SMS Threaded Check Valve
Part no:CKV06

Size	H	D	G
25	110	76.5	RD40x1/6
38	116	87	RD60x1/6
51	136	100	RD70x1/6
63	152	115	RD85x1/6
76	160	128	RD98x1/6
102	170	164	RD132x1/4

SMS Welded Union Type Check Valve
Part no:CKV07

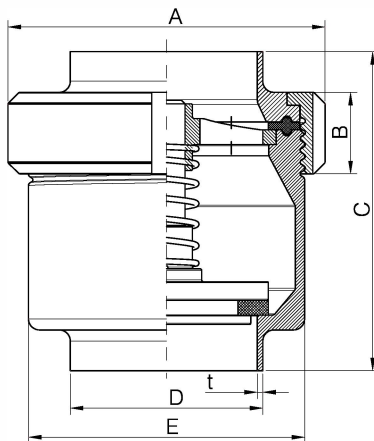

Size	A	B	C	D	E	t
25	64	20	68	25.4	53.6	1.5
32	64	20	68	31.8	53.6	1.5
38	71	21	76	38.1	60.6	1.5
51	86	22	86	50.8	74.6	1.5
63	100	24	102	63.5	87.6	2.0
76	112	26	110	76.2	97.5	2.0
89	123	26	120	88.9	109.5	2.0
102	143.5	31	135	101.6	129.5	2.0

DIN Welded Union Type Check Valve
Part no:CKV08

Size	A	B	C	E	DIN1850-1	DIN1850-2
					DXt	DXt
DN25	64	20	68	53.5	28x1.5	29x1.5
DN32	64	20	68	53.5	34x1.5	35x1.5
DN40	71	21	76	60.5	40x1.5	41x1.5
DN50	86	22	86	74.6	52x1.5	53x1.5
DN65	108	25	102	94.6	70x2	70x2
DN80	123	26	120	109.5	85x2	85x2
DN100	145.3	31	135	129.5	104x2	104x2

止回阀.CHECK VALVE

Y Ball Check Valve

Working Principle

When liquid flows through the valve, the ball is forced into the branch of the valve allowing full fluid flow. When the liquid stops, equalizing the pressure, the ball drops back into the seat, preventing back flow. Should reverse flow occur, the differential pressure will cause the ball to seal firmly against the seat preventing leakage.


Design Features

- Two piece construction for easier alignment during installation
- ID and OD polished to 3A standards
- All metal contact surfaces of 316L stainless steel construction
- PTFE ball
- Field serviceable without special tools

Technical Data

Max. Temperature: –10 degree C – 120 degree C

Max. Pressure: 10 Bar

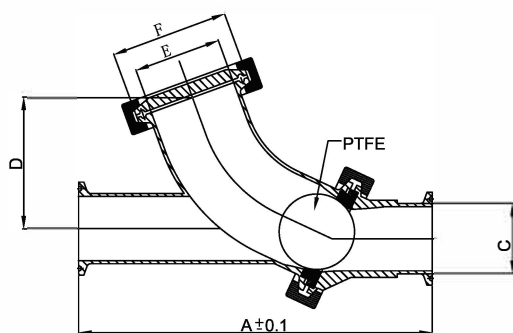

Part no:CKV09

SIZE	A		C		D		E		F	
	in	mm	in	mm	in	mm	in	mm	in	mm
1 1/2"	7.50	190.5	1.50	38.1	3.30	83.82	1.87	47.5	2.52	64
2"	8.50	215.9	2.00	50.8	3.90	99.06	2.33	59.3	3.05	77.5
2 1/2"	10.00	254	2.50	63.5	4.50	114.3	2.87	72.9	3.58	91
3"	11.50	292.1	3.00	76.2	5.30	134.62	3.83	97.4	4.69	119

隔膜阀.DIAPHRAGM VALVE

应用Applicaion

隔膜阀，手动或气动操作，专门应用于制药工业中的卫生和无菌过程。

Diaphragm valves, manually or pneumatically operated, are specifically designed for Utral aseptic pharmaceutical industry

操作原理 Operating principle

膜片提供阀体密封和阀座密封。里面没有路径通到外部环境，所以该阀门适用于无菌过程。

当阀门关闭时，支撑膜片的压力垫朝阀体上的密封面移动。当压力板移动时，膜片弯曲，被迫推向阀体中心的阀座区域，因此关闭了通向阀体的流体路径。

阀体和压力板的相互关系，防止了膜片的挤压。

该阀门可以手动也可以气动操作，也可以通过控制器和电磁阀控制。



The diaphragm provides the body seal as well as the seat seal. There are no paths to the outside environment and as such the valve is suitable for aseptic processes.

As the valve is closed a pressure pad which supports the diaphragm moves towards the sealing face on the body. As the pressure plate moves the diaphragm flexes and is forced down onto the seat area in the centre of the body thus closing off the flow path through the body.

The inter-relationship of body to the pressure plate prevents over compression of the diaphragm.

The valve can be actuated either manually or pneumatically and controlled by control tops and solenoid valves.



DN6-DN10

技术规格Technical specification

最大压力 10bar (145 PSI)

Max. pressure: 10 BAR(145PSI)

最大工作温度-10℃ +120℃ (EPDM) -14 ° F
+248 ° F (+140 ° C (SIP, 30) 284 ° F)

Working temperature: -10℃ to +120℃
(EPDM) -14 ° F to 248 ° F
(+140 ° C (SIP, max. 30 min) 284 ° F)



PTFE+EPDM double seal



EPDM diaphragm

隔膜阀.DIAPHRAGM VALVE

设计和特点

Design and features

该隔膜阀同其他阀门设计相比，该阀门有着优越的流量特点。更容易清洁，很好的处理带颗粒的物料，在流量控制的应用上，气穴现象也更少些。

迷你型隔膜阀规格：1/4"， 3/8"， 1/2"， 3/4"

隔膜阀规格：1" — 4"

适用于CIP/SIP

和物料接触部分 AISI 316L

其他不锈钢部分 AISI 304

内表面处理 亮光 $Ra \leq 0.5 \mu m$

外表面处理 亚光/亮光

The diaphragm valves are better in feature of flow in comparison substance with particles. The phenomenon of air pocket is rare with other valves. It is easier to clean up and better to process the during application of flow control.

Mini diaphragm valve available size: 1/4", 3/8", 1/2", 3/4"

Diaphragm valve available size: 1" — 4"

Suitable for CIP/SIP.

Parts in contact with the product: AISI 316L,

Other stainless steel parts: AISI 304,

Internal surface finish bright, $Ra \leq 0.5 \mu m$

External surface finish satin/bright

选项

Options

连接（标准）：卡箍、焊接、螺纹，DIN SMS IDF ISO 3A BPE

阀体结构：直通、三通、U型

膜片材料：EPDM, SILICON(硅胶)

EPDM+PTFE(双层膜片)符合FDA 177.2600

Connections(standard): clamp, weld, thread, DIN SMS IDF ISO 3A BPE

Body construction: Straight, Three ways, U type


Diaphragms in EPDM, SILICON, EPDM+PTFE, all of them according to FDA 177.2600

隔膜阀最优安装角度示意图

Optimal Installation Angle Diagram

无菌隔膜阀根据其结构特点：推荐15-30度角安装（根据不同的规格而定），有利于阀门清洗后完全排泄，不易造成液体滞留阀门内部。

According to the structure feature, fifteen thirty degree is optimal, which makes for complete drain after cleaning and keep no residue.

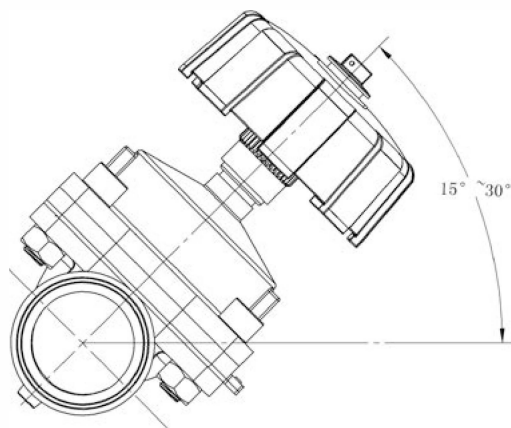



Pneumatic diaphragm valve



Pneumatic tank bottom diaphragm valve



隔膜阀.DIAPHRAGM VALVE

卡箍手动隔膜阀Clamped Diaphragm Valve
Part no:DIV01

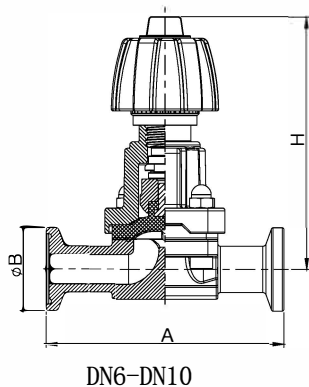


Size	A	B	H
DN8	72	34	74.5/79.5
DN10	72	34	74.5/79.5
DN15	108	34	90.5/99.5
DN20	118	34	111.5/122
DN25	127	50.5	111.5/122
DN32	146	50.5	131/148.5
DN40	160	50.5	131/148.5
DN50	190	64	161/190
DN65	216	91	199/228
DN80	254	106	220/249
3/8"	72	25.4	74.5/79.5
1/2"	108	25.4	90.5/99.5
3/4"	118	25.4	111.5/122
1"	127	50.5	111.5/122
1 1/4"	146	50.5	131/148.5
1 1/2"	160	50.5	131/148.5
2"	190	64	161/190
2 1/2"	216	91	199/228
3"	254	106	220/249

焊接手动隔膜阀Butt welded Diaphragm Valve
Part no:DIV02





Size	A	B	H	T
DN8	72	8	74.5/79.5	1
DN10	72	12	74.5/79.5	1.5
DN15	108	18	90.5/99.5	1.5
DN20	118	22	111.5/122	1.5
DN25	127	28	111.5/122	1.5
DN32	146	34	131/148.5	1.5
DN40	160	40	131/148.5	1.5
DN50	190	52	161/190	1.5
DN65	216	70	199/228	2
3/8"	72	9.5	74.5/79.5	0.9
1/2"	108	12.7	90.5/99.5	1.65
3/4"	118	19.05	111.5/122	1.65
1"	127	25.4	111.5/122	1.65
1 1/4"	146	31.8	131/148.5	1.65
1 1/2"	160	38.1	131/148.5	1.65
2"	190	50.8	161/190	1.65
2 1/2"	216	63.5	199/228	1.65


隔膜阀.DIAPHRAGM VALVE



焊接式
Welded Type





快装式
Clamp Type



三通隔膜阀Three-way T Type Diaphragm Valve Part no:DIV03

Size	A	B	C	D	E	L
DN20	118	22	34	81	19	93/103.5
DN25	127	28	50.5	101.5	25	93/103.5
DN32	146	34	50.5	123	31	107/124.5
DN40	160	40	50.5	132	37	107/124.5
DN50	190	52	64	157	49	129/151.5
3/4"	118	19.05	25.4	81	15.75	93/103.5
1"	127	25.4	50.5	101.5	22.1	93/103.5
1 1/4"	146	31.8	50.5	123	28.5	107/124.5
1 1/2"	160	38.1	50.5	132	34.8	107/124.5
2"	190	50.8	64	157	47.5	129/151.5

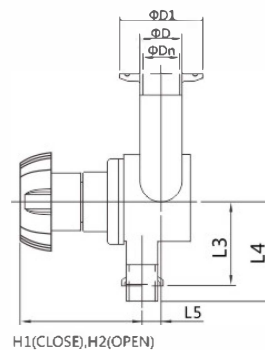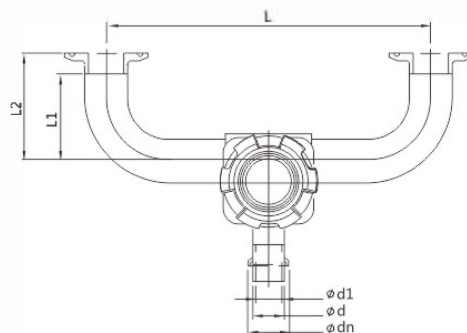


U型三通隔膜阀Three-way U Type Diaphragm Valve Part no:DIV04

SIZE	ØDn	ØD	ØD1	Ødn	Ød	Ød1	L	L1	L2	L3	L4	L5	H1	H2
1/2"X1"	22.1	25.4	50.5	9.4	13	25	197	52.4	65.1	64.4	78	11.6	74	83
1/2"X1.5"	34.8	38.1	25.2	9.4	13	25	114	74.6	87.3	70.7	85	15.8	74	83
1/2"X2"	47.5	50.8	64	9.4	13	25	298	103	116	77.1	91	18.4	74	83
3/4"X1"	22.1	25.4	25.2	16	19	25	197	52.4	65.1	64.4	78	11.6	74	83
3/4"X1.5"	34.8	38.1	25.2	16	19	25	214	74.6	87.3	70.7	85	15.8	74	113
3/4"X2"	47.5	50.8	64	16	19	25	298	103	116	77.1	91	18.4	74	83


隔膜阀.DIAPHRAGM VALVE

手动罐底隔膜阀Manual Tank Bottom Diaphragm Valve
Part no:DIV05

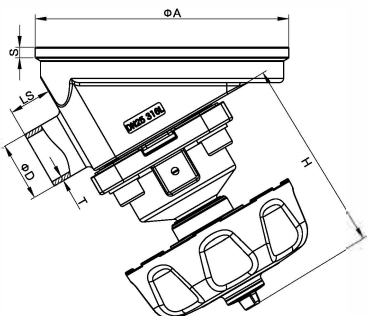


Size	A	S	Ls	H	D	T
DN20	90	6	16	93.5/103.5	22	1.5
DN25	120	6	20	93.5/103.5	28	1.5
DN32	160	6	20	107/124.5	34	1.5
DN40	160	6	20	107/124.5	40	1.5
DN50	200	6	30	129/151.5	52	1.5
3/4"	90	6	16	76.5/83.5	19.05	1.5
1"	120	6	20	93.5/103.5	25.4	1.5
1 1/4"	160	6	20	107/124.5	31	1.5
1 1/2"	160	6	20	107/124.5	38.1	1.5
2"	200	6	30	129/151.5	50.5	1.5

气动罐底隔膜阀Pneumatic Tank Bottom Diaphragm Valve
Part no:DIV06

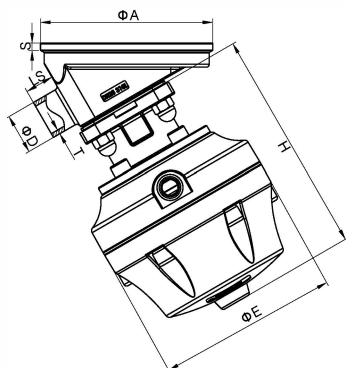

Size	A	S	Ls	H	E	D	T
DN20	90	6	16	125	90	22	1.5
DN25	120	6	20	160	126	28	1.5
DN32	160	6	20	190	150	34	1.5
DN40	160	6	20	190	150	40	1.5
DN50	200	6	30	190	150	52	1.5
3/4"	90	6	16	125	90	19.05	1.5
1"	120	6	20	160	126	25.4	1.5
1 1/4"	160	6	20	190	150	31	1.5
1 1/2"	160	6	20	190	150	38.1	1.5
2"	200	6	30	190	150	50.5	1.5

锻造T形三通隔膜阀/Forged T Type Zero dead Leg Diaphragm Valve
Part no:DIV07

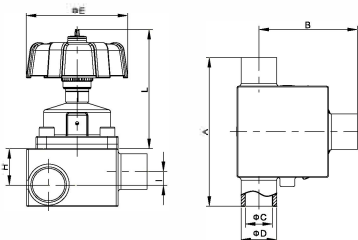


Size	A	B	C	D	E	L	H
DN15	108	66	15	18	65	76.5/85.5	25
DN20	118	75	19	22	65	76.5/85.5	25
DN25	127	82	25	28	89	93.5/103.5	28
DN32	146	98.5	31	34	109	107/124.5	36
DN40	160	105.5	37	40	109	107/124.5	39
DN50	190	123	49	52	139	129/151.5	46.5
DN65	216	129.5	67	79	200	140/168	55
3/4"	108	66	15.75	19.05	65	76.5/85.5	25
1"	127	82	22.1	25.4	65	76.5/85.5	25
1 1/4"	146	98.5	28.5	31.8	89	93.5/103.5	28
1 1/2"	160	105.5	34.8	38.1	109	107/124.5	36
2"	190	123	47.5	50.8	109	107/124.5	39
2 1/2"	216	129.5	60.2	63.5	139	129/151.5	46.5

隔膜阀.DIAPHRAGM VALVE

气动焊接隔膜阀

Pneumatic Direct 2 way Welded Diaphragm Valve

Part no:DIV08

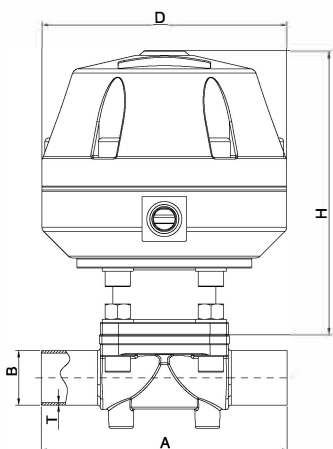


Size				A	D	H
DIN	3A	SMS	ISO			
DN20 B×T 22×1.5	3/4" B×T 19.1×1.65	19 B×T 19.1×1.5	Φ19 B×T 19.1×1.5	108.0	126.0	146.2
DN25 B×T 28×1.5	1" B×T 25.4×1.65	25 B×T 25.4×1.5	Φ25 B×T 25.4×1.5	118.0	126.0	146.2
DN32 B×T 34×1.5	1 1/4" B×T 31.8×1.65	32 B×T 31.8×1.5	Φ32 B×T 31.8×1.5	127.0	126.0	146.2
DN40 B×T 40×1.5	1 1/2" B×T 38.1×1.65	38 B×T 38.1×1.5	Φ38 B×T 38.1×1.5	146.0	126.0	146.2
DN50 B×T 52×1.5	2" B×T 50.8×1.65	51 B×T 50.8×1.5	Φ51 B×T 50.8×1.5	190.0	126.0	146.2
DN65 B×T 70×2	2 1/2" B×T 63.5×1.65	63 B×T 63.5×2	Φ63 B×T 63.5×2	216.0	126.0	146.2

气动卡箍隔膜阀

Pneumatic Direct 2 way Clamped Diaphragm Valve

Part no:DIV09

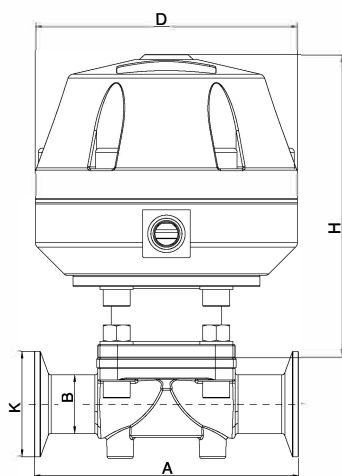

Size				A	D	H
DIN	3A	SMS	ISO			
DN20 B 22 K 50.5	3/4" B 19.1 K 25.4	19 B 19.1 K 25.4	Φ19 B 19.1 K 25.4	108.0	126.0	146.2
DN25 B 28 K 50.5	1" B 25.4 K 50.5	25 B 25.4 K 50.5	Φ25 B 25.4 K 50.5	118.0	126.0	146.2
DN32 B 34 K 50.5	1 1/4" B 31.8 K 50.5	32 B 31.8 K 50.5	Φ32 B 31.8 K 50.5	127.0	126.0	146.2
DN40 B 40 K 50.5	1 1/2" B 38.1 K 50.5	38 B 38.1 K 50.5	Φ38 B 38.1 K 50.5	146.0	126.0	146.2
DN50 B 52 K 64.0	2" B 50.8 K 64.0	51 B 50.8 K 64.0	Φ51 B 50.8 K 64.0	190.0	126.0	146.2
DN65 B 70 K 91.0	2 1/2" B 63.5 K 77.5	63 B 63.5 K 77.5	Φ63 B 63.5 K 77.5	216.0	126.0	146.2