

LED TRACK LIGHT

www.lowcled.com



Application Places

Hotel, meeting room, factory, office, bar, coffee house, residential, show room, Institution Buildings, School, hospital, Places where there require high rendering index and energy-saving lighting fixtures.

Features:

- Model: LL-TR09
- Input voltage:100-240VAC 50/60Hz
- Light source:LED
- LED: COB
- Power:30W/40W
- Color: Warm White/Cool White
- Lumen:
30W:1900lm(WW)-2100lm(CW)
40W:2600lm(WW)-2800lm(CW)
- CRI:80
- Beam Angle:24°
- Operation Temperature:-20-+50
- Fixture Material: Aluminium
- Life Span: 50000Hours
- Size:Φ236x94mm



LL-TR01



LL-TR02



LL-TR03



LL-TR04



LL-TR05



LL-TR06



LL-TR07



LL-TR08

Model NO.	Power	LED Type	CRI	Lumen	Beam angle	Input voltage	Size
LL-TR01	20W/30W	COB	80	1250LM-2100LM	15°/24°	AC100-240V	Φ 135x92mm
LL-TR02	20W/30W	COB	80	1250LM-2100LM	15°/24°	AC100-240V	Φ 135x92mm
LL-TR03	15W	COB	80	950LM-1050LM	15°/24°	AC100-240V	Φ 110x62mm
LL-TR04	20W/30W	COB	80	1150LM-2100LM	15°/24°	AC100-240V	Φ 110x90mm
LL-TR05	20W/30W	COB	80	1150LM-2100LM	15°/24°	AC100-240V	Φ 165x100mm
LL-TR06	30W/50W	COB	80	1900LM-3500LM	15°/24°	AC100-240V	Φ 125x95mm
LL-TR07	30W	COB	80	1900LM-2100LM	24°	AC100-240V	Φ 137x93mm
LL-TR08	15W/20W/30W	COB	80	950LM-2100LM	15°/24°	AC100-240V	Φ 90x70mm
LL-TR09	30W/40W	COB	80	1900LM-2800LM	24°	AC100-240V	Φ 236x94mm

LED STRIP LIGHT

www.lowcled.com




Application Places

Building, Amusement park, Theater, Shopping mall,
Restaurant, Hotel, Advertisement board, Canopy,
Corridor, Window, Archway, Signage board ,
Exhibition,etc.

Features:

- Product type:IP20 Non-waterproof LED strip light
- Model: LL-FSLU-2835
- LED Type: SMD2835
- Optional LED qty./M: 60/M or 144/M
- Optional Power./M: 14.4W/M or 34.5W/M
- IP degree: IP20
- Size:
 - 5000*10mm (For LED qty 60/M and 144/M)
- Colors available: cool white and warm white
- Voltage: DC 12V/24V
- Comes with double-sided 3M adhesive tape at the back of the light strip
- Storage Temperature: -40°C ~ $+80^{\circ}\text{C}$
- Operating Temperature: -25°C ~ $+60^{\circ}\text{C}$
- Packing bag: Anti static bag
- Life span: 50,000 hours
- Certificate: CE&ROHS

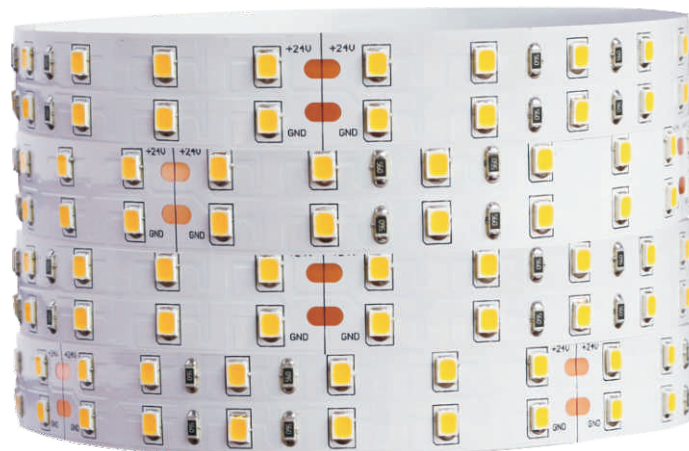

SMD 2835 - 144/M



SMD 2835 - 60/M



Model NO.	IP	Power	LED Type	Color	Size
LL-FSLU	Ip20	DC 12V/24V	SMD3528/2835/5050/3014	WW/WC/R/G/B/Y/RGBY	W : 8mm/10mm/15mm
LL-FSLSS	Ip65	DC 12V/24V	SMD3528/2835/5050/3014	WW/WC/R/G/B/Y/RGBY	W : 8mm/10mm/15mm
LL-FSLWS	Ip67	DC 12V/24V	SMD3528/2835/5050/3014	WW/WC/R/G/B/Y/RGBY	W : 10mm/12mm/17mm
LL-FSLSG	Ip68	DC 12V/24V	SMD3528/2835/5050/3014	WW/WC/R/G/B/Y/RGBY	W : 10mm/12mm/17mm

LED PAR LIGHT

www.lowcled.com

Application Places

Basic commercial lighting or decoration with good energy saving.

Shopping, specialty, hotels, offices and home lighting.

Generally matching in chandeliers, lamps and more

Features:

- Model: LL-PAR30-15W-COB
- LED Type: COB 15W
- Input voltage: 85-265V AC
- Dimension: 95*120mm
- Luminous Flux:83%
- Total Luminous Flux: 1,300lm
- Base: E27/ E26 optional
- Beam Angle: 30°(Clear) / 38°80°(Frosted)
- Waterproof: IP20 indoor use only
- Color: Warm white/ Natural white/ Cool white
- Dimmable: Non-dim/Dim
- Total Harmonic Distortion(THD): < 20%
- Storage Temperature: -40℃--+60℃
- Working Environment: -20℃--+45℃;10~95%RH
- Working Lifetime:> 50,000 hours
- Material: Aluminum Alloy + acrylic
- Net Weight: 250g
- Box size: 100*100*140mm
- Package: 25pcs/ctn (57*57*18cm)



LL-PAR20-7W-COB



LL-PAR38-18W-COB(Frosted)

Model NO.	Power	Chip	Voltage	Lumen	Dimmable	Base	Beam angle	Size
LL-PAR20-7W-COB	7W	COB	85-265VAC	600LM	Non-dim/Dim	E27/E26	30°	φ63*80
LL-PAR30-15W-COB	15W	COB	85-265VAC	1500LM	Non-dim/Dim	E27/E26	30°(Clear)/ 38°80°(Frosted)	φ95*120
LL-PAR38-18W-COB	18W	COB	85-265VAC	1800LM	Non-dim/Dim	E27/E26	30°(Clear)/ 38°80°(Frosted)	φ120*131

LED PANEL LIGHT

www.lowcled.com



Application Places

Hotel, meeting room, factory, office, bar, coffee house, residential, show room, Institution Buildings, School, hospital, Places where there require high rendering index and energy-saving lighting fixtures.

Features:

- Model: LL-PL-S200
- Type: Recessed square led panel light
- Chipset: Epistar
- LED Type: SMD2835
- Lamp Rated Total Power: 15W
- LED Q'ty: 72PCS
- Total Luminous Flux: 1050lm
- Color Temperature(CCT)
Cool white: 6000-6500K
Pure white: 4000-4500K
Warm white: 2700-3200K
- Input Voltage: 85-265VAC
- Frequency: 50-60Hz
- Power Factor(PF): 0.9
- Total Harmonic Distortion(THD): < 20%
- Storage Temperature: -40°C--+60°C
- Working Environment: -20°C--+45°C;10~95%RH
- Working Lifetime:> 50,000 hours
- IP Rating: Ip20
- Product Dimension(mm): 200*200*12mm
- Open Size: 190*190



Model NO.	Power	Size	Open Size	Chip	LED type	LED Q'ty	Voltage	IP	Lumen
LL-PL-S120	6W	120*120*12mm	110*110	Epistar	SMD2835	30PCS	85-265VAC	Ip20	395LM
LL-PL-S145	9W	145*145*12mm	135*135	Epistar	SMD2835	48PCS	85-265VAC	Ip20	700LM
LL-PL-S170	12W	170*170*12mm	160*160	Epistar	SMD2835	60PCS	85-265VAC	Ip20	900LM
LL-PL-S200	15W	200*200*12mm	190*190	Epistar	SMD2835	72PCS	85-265VAC	Ip20	1050LM
LL-PL-S225	18W	225*225*12mm	205*205	Epistar	SMD2835	80PCS	85-265VAC	Ip20	1500LM
LL-PL-S240	24W	240*240*12mm	225*225	Epistar	SMD2835	120PCS	85-265VAC	Ip20	1800LM

LED panel light

www.lowcled.com

Features:

- Model: LL-PL-600X600-N
- Type: Recessed square led panel light
- LED Light Source: Epistar SMD 2835
- LED Quantity: 216 PCS
- Lamp Rated Total Power: 45W
- Power Efficiency:83%
- Total Luminous Flux: 3,600lm
- Color Temperature(CCT)
Cool white: 6000-6500K
Pure white: 4000-4500K
Warm white: 2700-3200K
- Input Voltage: 85-265VAC
- Power Factor(PF): 0.9
- Total Harmonic Distortion(THD): < 20%
- Storage Temperature: -40℃--+60℃
- Working Environment: -20℃--+45℃;10~95%RH
- Working Lifetime:> 50,000 hours
- IP Rating: IP20
- Material: Aluminum Alloy + acrylic
- Dimmable: Non-Dimmable / Dimmable optional
- Product Dimension(mm): 600X600X9.8mm



300*300(mm)
LL-PL-300X300-N



600*600(mm)
LL-PL-600X600-N

Model NO.	Power	Size	Chip	LED type	LED Q'ty	Voltage	IP	Lumen
LL-PL-200X200-N	18W	200*200*9.8mm	Epistar	SMD3014	96PCS	85-265VAC	Ip20	1350LM
LL-PL-300X300-N	20W	300*300*9.8mm	Epistar	SMD2835	100PCS	85-265VAC	Ip20	1500LM
LL-PL-300X600-N	25W	300*600*9.8mm	Epistar	SMD2835	96PCS	85-265VAC	Ip20	1500LM
LL-PL-600X600-N	40W	600*600*9.8mm	Epistar	SMD2835	192PCS	85-265VAC	Ip20	3200LM
LL-PL-600X600-N	45W	600*600*9.8mm	Epistar	SMD2835	216PCS	85-265VAC	Ip20	3600LM
LL-PL-300X1200-N	40W	300*1200*9.8mm	Epistar	SMD2835	200PCS	85-265VAC	Ip20	3100LM
LL-PL-300X1200-N	48W	300*1200*9.8mm	Epistar	SMD2835	288PCS	85-265VAC	Ip20	3600LM
LL-PL-600X1200-N	60W	600*1200*11.5mm	Epistar	SMD3014	432PCS	85-265VAC	Ip20	4400LM

Features:

- Model: LL-PL-R170
- Type: Recessed round led panel light
- Chipset: Epistar
- LED Type: SMD2835
- Lamp Rated Total Power: 12W
- LED Q'ty: 60PCS
- Total Luminous Flux: 900lm
- Color Temperature(CCT)
Cool white: 6000-6500K
Pure white: 4000-4500K
Warm white: 2700-3200K
- Input Voltage: 85-265VAC
- Power Factor(PF): 0.9
- Total Harmonic Distortion(THD): < 20%
- Storage Temperature: -40℃--+60℃
- Working Environment: -20℃--+45℃;10~95%RH
- Working Lifetime:> 50,000 hours
- IP Rating: Ip20
- Product Dimension(mm): Φ 170*12mm
- Open Size: Φ 150



Model NO.	Power	Size	Open Size	Chip	LED type	LED Q'ty	Voltage	IP	Lumen
LL-PL-R120	6W	Φ 120*12mm	Φ 100	Epistar	SMD2835	30PCS	85-265VAC	Ip20	395LM
LL-PL-R145	9W	Φ 145*12mm	Φ 128	Epistar	SMD2835	45PCS	85-265VAC	Ip20	700LM
LL-PL-R170	12W	Φ 170*12mm	Φ 150	Epistar	SMD2835	60PCS	85-265VAC	Ip20	900LM
LL-PL-R225	18W	Φ 225*12mm	Φ 200	Epistar	SMD2835	90PCS	85-265VAC	Ip20	1500LM
LL-PL-R240	24W	Φ 240*12mm	Φ 225	Epistar	SMD2835	120PCS	85-265VAC	Ip20	1800LM

LED panel light

www.lowcled.com

Features:

- Model: LL-SPL-R240
- Type: Surface mounted led panel light
- LED Light Source: Epistar SMD 2835
- LED Quantity: 120 PCS
- Lamp Rated Total Power: 24W
- Total Luminous Flux: 1,800lm
- Color Temperature(CCT)
 - Cool white: 6000-6500K
 - Pure white: 4000-4500K
 - Warm white: 2700-3200K
- Input Voltage: 85-265VAC
- Power Factor(PF): 0.9
- Total Harmonic Distortion(THD): < 20%
- Storage Temperature: -40℃--+60℃
- Working Environment: -20℃--+45℃;10~95%RH
- Working Lifetime:> 50,000 hours
- IP Rating: IP20
- Material: Aluminum Alloy + acrylic
- Dimmable: Non-Dimmable / Dimmable optional
- Product Dimension(mm): $\varnothing$ 240*40mm



LL-SPL-R240



LL-SPLS-170X170

Model NO.	Power	Size	Chip	LED type	LED Q'ty	Voltage	IP	Lumen
LL-SPLS-120X120	6W	120*120*40mm	Epistar	SMD2835	20PCS	85-265VAC	Ip20	410LM
LL-SPLS-170X170	12W	170*170*40mm	Epistar	SMD2835	60PCS	85-265VAC	Ip20	900LM
LL-SPLS-225X225	18W	225*225*40mm	Epistar	SMD2835	80PCS	85-265VAC	Ip20	1300LM
LL-SPLS-240X240	24W	240*240*40mm	Epistar	SMD2835	120PCS	85-265VAC	Ip20	1800LM
LL-SPL-R120	6W	$\varnothing$ 120*40mm	Epistar	SMD2835	20PCS	85-265VAC	Ip20	410LM
LL-SPL-R170	12W	$\varnothing$ 170*40mm	Epistar	SMD2835	60PCS	85-265VAC	Ip20	900LM
LL-SPL-R225	18W	$\varnothing$ 225*40mm	Epistar	SMD2835	80PCS	85-265VAC	Ip20	1300LM
LL-SPL-R240	24W	$\varnothing$ 240*40mm	Epistar	SMD2835	120PCS	85-265VAC	Ip20	1800LM

LED DOWN LIGHT

www.lowcled.com



Application Places

Hotel, meeting room, factory, office, bar, coffee house, residential, show room, Institution Buildings, School, hospital, Places where there require high rendering index and energy-saving lighting fixtures.

LED down light

www.lowcled.com

Features:

- Model: LL-DL195105-18W
- Description: 6 Inch 18W Finned led downlight
- Input voltage: 100-240VAC 50-60Hz
- LED Type: SMD
- Power: 18W
- Color: Warm White/Cool White
- Lumen:1080lm
- Beam Angle: 120°
- Product size: Φ195 x 105mm
- Hole Size: Φ175mm
- Warranty: 3 years



LL-DL9053-3W/5W



LL-DL102659-7W/9W



LL-DL14578-12W/15W



LL-DL195105-18W/24W



LL-DL240106-30W/36W

Model NO.	Power	LED Type	Lumen	Beam angle	Input voltage	Product size	Hole size
LL-DL9053-3W	3W	SMD	150LM	120°	100-240VAC 50-60Hz	Φ 90 x 53mm	Φ 80mm
LL-DL9053-5W	5W	SMD	250LM	120°	100-240VAC 50-60Hz	Φ 90 x 53mm	Φ 80mm
LL-DL102659-7W	7W	SMD	420LM	120°	100-240VAC 50-60Hz	Φ 102 x 65.9 mm	Φ 90mm
LL-DL102659-9W	9W	SMD	540LM	120°	100-240VAC 50-60Hz	Φ 102 x 65.9 mm	Φ 90mm
LL-DL14578-12W	12W	SMD	720LM	120°	100-240VAC 50-60Hz	Φ 145 x 78 mm	Φ 125mm
LL-DL14578-15W	15W	SMD	900LM	120°	100-240VAC 50-60Hz	Φ 145 x 78 mm	Φ 125mm
LL-DL195105-18W	18W	SMD	1080LM	120°	100-240VAC 50-60Hz	Φ 195 x 105 mm	Φ 175mm
LL-DL195105-24W	24W	SMD	1450LM	120°	100-240VAC 50-60Hz	Φ 195 x 105 mm	Φ 175mm
LL-DL240106-30W	30W	SMD	1800LM	120°	100-240VAC 50-60Hz	Φ 240 x 106 mm	Φ 220mm
LL-DL240106-36W	36W	SMD	2200LM	120°	100-240VAC 50-60Hz	Φ 240 x 106 mm	Φ 220mm

Features:

- Model: LL-DL24263
- Description: COB Reflecting cup downlight
- Input voltage: 100-240VAC 50-60Hz
- LED Type: COB
- Power: 30W
- Color: Warm White/Cool White
- Lumen: 2100LM
- Beam Angle: 120°
- Product size: Φ242*63mm
- Hole Size: Φ210mm
- Warranty: 3 years



LL-DL155107-10W
LL-DL155107-20W
LL-DL155107-30W



LL-DL8570-5W
LL-DL8570-7W
LL-DL85115-10W
LL-DL85115-15W



LL-DL14563
LL-DL19663
LL-DL24263

Model NO.	Power	LED Type	Lumen	Beam angle	Input voltage	Product size	Hole size
LL-DL155107-10W	10W	COB	800LM	30°	100-240VAC 50-60Hz	Φ 155*107mm	Φ 145mm
LL-DL155107-20W	20W	COB	1500LM	30°	100-240VAC 50-60Hz	Φ 190*200mm	Φ 180mm
LL-DL155107-30W	30W	COB	2100LM	30°	100-240VAC 50-60Hz	Φ 190*200mm	Φ 180mm
LL-DL8570-5W	5W	COB	350LM	35°	100-240VAC 50-60Hz	Φ 85*70mm	Φ 70mm
LL-DL8570-7W	7W	COB	550LM	35°	100-240VAC 50-60Hz	Φ 85*70mm	Φ 70mm
LL-DL85115-10W	10W	COB	850LM	35°	100-240VAC 50-60Hz	Φ 85*115mm	Φ 70mm
LL-DL85115-15W	15W	COB	1200LM	35°	100-240VAC 50-60Hz	Φ 85*115mm	Φ 70mm
LL-DL14563	10W	COB	750LM	120°	100-240VAC 50-60Hz	Φ 145*63mm	Φ 125mm
LL-DL19663	20W	COB	1400LM	120°	100-240VAC 50-60Hz	Φ 196*63mm	Φ 170mm
LL-DL24263	30W	COB	2100LM	120°	100-240VAC 50-60Hz	Φ 242*63mm	Φ 210mm

LED BULB LIGHT

www.lowcled.com



Application Places

shopping malls, supermarkets, office buildings, home appliance and other places.

LED bulb light

www.lowcled.com

Features:

- Model: LL-G60-9W
- Power: 9W
- Lumious flux:750-810LM
- Power consumption: 8.9±10%W
- Voltage available:100-240VAC
- Current:0.068A MAX
- Frequency: 50Hz
- Power Factor: 0.43Pf
- Beam Angle: 220 Deg
- Working Temperature:-10~50℃
- Relative Humidity: 10%-90%RH
- Color Temperature: 2700K-3200K 5500K-6500K
- Base: E27/B22/E14/B15
- LED Qty: 7PCS
- LED Power:1W
- Lifetime: 30000H(25℃)
- CE and ROHS approved



LL-G45-3W/4.5W



LL-G60-7W/8W/9W



LL-A60-10W/13W



LL-R70-5W / LL-R63-8W

Model NO.	Power	Color	Lumen	Beam angle	Input voltage	Product size
LL-G45-3W-E27/B22/E14/B15	3W	WW/CW	220LM	200°	220-240VAC	Φ45.3×76mm
LL-G45-4.5W-E27/B22/E14/B15	4.5W	WW/CW	300LM	200°	220-240VAC	Φ45.3×76mm
LL-G60-7W-E27/B22/E14/B15	7W	WW/CW	610LM	200°	220-240VAC	Φ60×109mm
LL-G60-8W-E14/B15	8W	WW/CW	720LM	200°	220-240VAC	Φ60×107mm
LL-G60-9W-E27/B22/E14/B15	9W	WW/CW	810LM	200°	220-240VAC	Φ60×109mm
LL-A60-10W-E27/B22	10W	WW/CW	810LM	170°	220-240VAC	Φ60×107mm
LL-A70-13W-E27/B22	13W	WW/CW	1100LM	170°	220-240VAC	Φ70×124mm
LL-R70-5W-E14/B15	5W	WW/CW	400LM	160°	220-240VAC	Φ70×124mm
LL-R63-8W-E27/B22	8W	WW/CW	650LM	130°	220-240VAC	Φ63×103mm

Features:

- Model: LL-C38-5W-S6-E14/B15
- Base: E14/B15
- Power: 4.8W
- EQ.Watts: 25W
- Lumen: 350-400LM
- LED Q'ty: 6PCS
- Power factor: >0.42
- Color Rendering Index(CRI): Ra≥ 80
- Color Temperature(CCT)
Cool white: 6000-6500K
Pure white: 4000-4500K
Warm white: 2700-3200K
- Beam Angle: 260°
- Input Voltage: 100-240VAC
- Frequency: 47-63Hz
- Lifetime: 30000H(25℃)
- CE and ROHS approved



LL-C38-5W-S8-E14/B15



LL-C38-3W/5W-S6-E14/B15

Model NO.	Power	Base	EQ	Lumen	Beam angle	Input voltage	Product size
LL-C38-3W-S6-E14/B15	3W	E14/B15	20W	240-280LM	260°	100-240VAC	Φ 38×112mm
LL-C38-5W-S6-E14/B15	4.8W	E14/B15	25W	350-400LM	260°	100-240VAC	Φ 38×112mm
LL-C38-5W-S8-E14/B15	4.2W	E14/B15	20W	300-320LM	260°	100-240VAC	Φ 38×112mm

LED SPOT LIGHT

www.lowcled.com



Application Places

Hotel, meeting room, factory, office, bar, coffee house, residential, show room, stores, hospital, supper market, shopping malls, and other places.

Features:

- Model: LL-GU10-5W-S24
- Power: 5W
- Color: Warm White/Cool white
- LED type: COB
- Luminosity: 370LM(CW)/350LM(WW)
- Dimmable: Non-dim(ND)/Dimmable(DM)
- Input voltages: 85-265V(ND)/220-240V(DM)
- Beam angle: 60°
- Size: Φ 50*56
- Material: Alloy Aluminum Housing + PC
- Storage Temperature: -20---80
- Operating Temperature: -20---40
- Lifespan: 40,000hrs
- Warranty: 3 years
- Certificate:CE&ROHS



LL-GU10-5W-A1
LL-GU10-7W-A1
LL-MR16-5W-A1



LL-MR16-4.5W-S24



LL-MR16-4.5W-S20



LL-GU10-4.5W-S6



LL-GU10-4.5W-C1

Model NO.	Power	Chip	Dimmable	Input voltage	Lumen	Beam angle	Size(mm)
LL-GU10-5W-A1	5W	COB	ND/DM	85-265V(ND)/220-240V(DM)	350LM	90°	Φ 50×54.9
LL-GU10-7W-A1	7W	COB	ND	85-265V(ND)	500LM	90°	Φ 50×54.9
LL-MR16-5W-A1	5W	COB	ND	12V	350LM	90°	Φ 50×52.6
LL-GU10-5W-S24	5W	COB	ND/DM	85-265V(ND)/220-240V(DM)	370LM	60°	Φ 50*56
LL-MR16-4.5W-S24	4.5W	COB	ND	12V	360LM	60°	Φ 50*53
LL-GU10-4W-S20	4W	COB	ND/DM	85-265V(ND)/220-240V(DM)	260LM	120°	Φ 50*56
LL-MR16-4.5W-S20	4.5W	COB	ND	12V	330LM	120°	Φ 50*54
LL-GU10-4.5W-S6	4.5W	COB	ND/DM	85-265V(ND)/220-240V(DM)	320LM	20°	Φ 50*53.5
LL-GU10-4.5W-C1	4.5W	COB	ND/DM	85-265V(ND)/220-240V(DM)	320LM	90°	Φ 0*53.5
LL-GU10-5W-C2	5W	COB	ND	85-265V(ND)	340LM	90°	Φ 50*56
LL-GU10-4.5W-C2	4.5W	COB	DM	220-240V(DM)	340LM	90°	Φ 50*56

LED TUBE LIGHT

www.lowcled.com



Application Places

Hotel, meeting room, factory, office, bar, coffee house, residential, show room, school, hospital, supper market, subways, and other public places.

LED tube light

www.lowcled.com

Features:

- Model: LL-T8/1200-96P-3C-N
- Power: 20W
- Length: 1200mm
- Color: Warm White/cool white
- LED type: SMD 2835
- LED quantity: 96pcs
- Luminosity: 1,500lm
- Input voltages: 85 to 265V AC
- Power Factor: 98
- Ra: 80
- Driver: Build-in Isolated Constant Current Driver
- Material: Alloy Aluminum Housing + PMMA Lens
- Storage Temperature: -40---80
- Operating Temperature: -37---55
- Lifespan: 50,000hrs



LL-T8/600-48P-3C-H-IN



Model NO.	Power	Length(mm)	LED type	LED Q'ty	Input voltage	Ra	Lumen
LL-T8/600-48P-3C-N	10W	600	SMD2835	48	85 - 265V AC	80	750LM
LL-T8/900-72P-3C-N	14W	600	SMD2835	72	85 - 265V AC	80	1100LM
LL-T8/1200-96P-3C-N	20W	1200	SMD2835	96	85 - 265V AC	80	1500LM
LL-T8/1500-120P-3C-N	25W	1500	SMD2835	120	85 - 265V AC	80	1900LM
LL-T8/600-48P-3C-H-IN	10W	600	SMD2835	48	85 - 265V AC	80	950LM
LL-T8/1200-96P-3C-H-IN	20W	1200	SMD2835	96	85 - 265V AC	80	1900LM
LL-T8/1500-120P-3C-H-IN	25W	1500	SMD2835	120	85 - 265V AC	80	2200LM

Features:

- Model: LL-T5/900-72P-3C-H
- Power: 14W
- Length: 900mm
- Color: Warm White/cool white
- LED type: SMD 2835
- LED quantity: 72pcs
- Luminosity: 1,350lm
- Input voltages: 85 to 265V AC
- Power Factor: 98
- Ra: 80
- Driver: Build-in Isolated Constant Current Driver
- Material: Alloy Aluminum Housing + PMMA Lens
- Storage Temperature: -40---80
- Operating Temperature: -37---55
- Lifespan: 50,000hrs



Model NO.	Power	Length(mm)	LED type	LED Q'ty	Input voltage	Ra	Lumen
LL-T5/600-48P-3C-H	9W	600	SMD2835	48	85 - 265V AC	80	850LM
LL-T5/900-72P-3C-H	14W	900	SMD2835	72	85 - 265V AC	80	1350LM
LL-T5/1200-96P-3C-H	18W	1200	SMD2835	96	85 - 265V AC	80	1800LM
LL-T5/1500-120P-3C-H	24W	1500	SMD2835	120	85 - 265V AC	80	2300LM
LL-T5/600-72P-4C-H	9W	600	SMD3014	72	85 - 265V AC	80	850LM
LL-T5/900-96P-4C-H	14W	900	SMD3014	96	85 - 265V AC	80	1350LM
LL-T5/1200-144P-4C-H	18W	1200	SMD3014	144	85 - 265V AC	80	1800LM
LL-T5/1500-180P-4C-H	24W	1500	SMD3014	180	85 - 265V AC	80	2300LM
LL-T5/1800-240P-4C-H	28W	1800	SMD3014	240	85 - 265V AC	80	2700LM



LOWCLED LIGHTING CO., LTD.

ADD: Xinfu Park, Chongqing Rd, Fuyong Industrial Avenue,
Fuyong Town, Bao'an District, Shenzhen, Guangdong, China

Tel: +86 755 29608065

Fax: +86 755 27399769

E-mail: sales@lowcled.com

Website: www.lowcled.com