




E-mail: weihuacranes@Gmail.com 销售电话: 13643909869

(5+5)t~(25+25)t 挂梁桥式起重机
(挂梁垂直主梁方向)

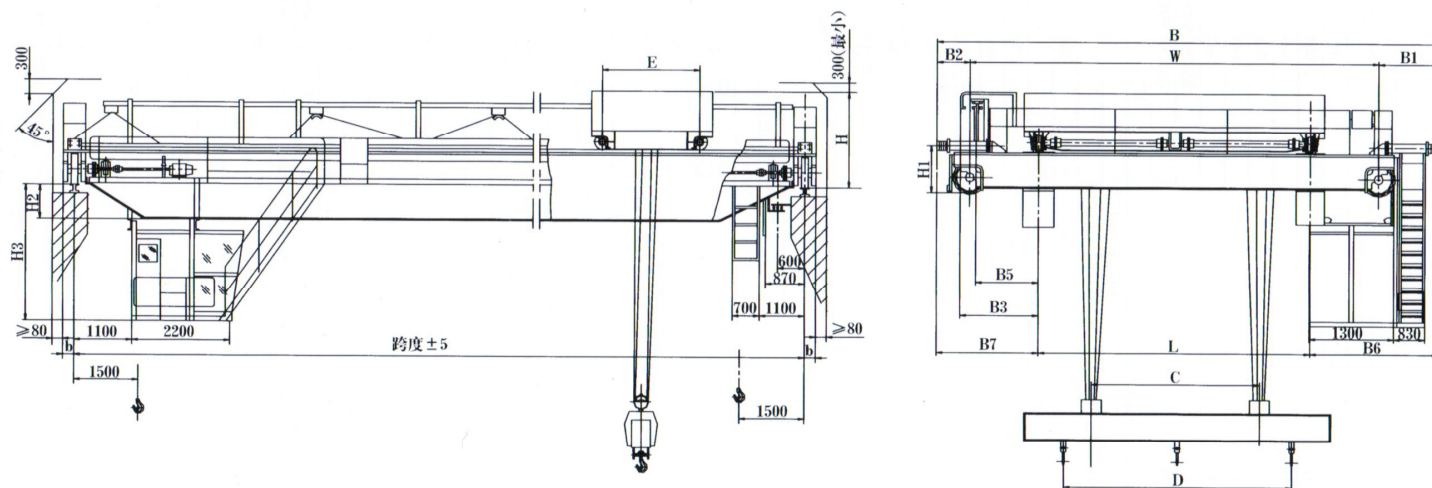

注:

- 1、进入司机室的走台入口方式分为:端入、侧入、顶入。
- 2、起重量包括挂梁重量。
- 3、起重机总重不包括挂梁重量。
- 4、挂梁上下吊点距C、D可根据用户要求确定,表中尺寸仅供参考。

Note:

- 1.The direction of platform door to the driver's cap is:side,end and top.
- 2.The lifting capacity includes the weight of the carrier-beam.
- 3.The total weight does't include the weight of the carrier-beam.
- 4.The value of C and D are depended on the requirements.

(5+5)t~(25+25)t 挂梁桥式起重机(垂直主梁方向)

Overhead crane with carrier-beam(plumbing with the beam) Cap.(5+5)t-(25+25)t

起重量 Lifting capacity				t	5+5									
跨度 Span				m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5		
最大起升高度 Max Lifting Height					16									
速度 Speed	起升 Hoisting	A5	m/min	12.9										
		A6		15.66										
	小车运行 crab travelling			43.8										
	大车运行 Trolley travelling	A5		90.7			91.9			84.7				
A6		115.6			116.8			112.5						
电动机 Motor	起升 Hoisting	A5	型号 Type/Kw	YZR200L-6/26										
		A6		YZR225M-6/30										
	小车运行 crab travelling			YZR132M1-6/2.5										
	大车运行 Trolley travelling	A5		YZR132M2-6/4×2				YZR160M1-6/6.3×2						
A6		YZR160M1-6/5.5×2				YZR160M2-6/7.5×2								
主要尺寸 Main Dimensions				B	7700			7930			8284			
				W	6050						7000			
				B1	1140			1250			772			
				B2	510			630			512			
				B3	1360	1410		1485						
				B5	1181	1206	1231	1256	1281			1306		
				B6	2165			2275			2272			
				B7	1535			1655			2012			
				Lx	4000±2									
				C	2500									
				D	2500~5000									
				E	1100									
				H	1876						1926			
				H1	765+H0						815+H0			
				H2	86	226	326	476	626	728	878	1028		
				H3	2626	2646	2696	2856	3006	3108	3258	3408		
				b	230									
				B	7704			7934			8504			
				W	6050						7000			
				B1	1142			1252			872			
				B2	512			632			632			
				B3	1360	1410		1485						
				B5	1181	1206	1231	1256	1281			1306		
				B6	2167			2277			2372			
				B7	1537			1657			2132			
				Lx	4000±2									
				C	2500									
				D	2500~5000									
				E	1100									
				H	1876						1926			
				H1	800+H0						850+H0			
H2	86	226	326	476	626	728	878	1028						
H3	2626	2646	2696	2856	3006	3108	3258	3408						
b	230													
重量 Weight	小车 Crab	A5	t	6										
		A6		6.2										
	总重 Total Weight	A5		17.2	20.5	22.3	24.2	26.9	31.4	34.9	38.6			
		A6		18	21.3	22.8	24.7	27.3	31.9	35.3	39			
最大轮压 Max.wheel Load		A5	KN	108	115	124	129	136	149	158	167			
		A6		111	118	126	131	138	151	160	169			
荐用钢轨 Steel track Recommended	小车 Crab		P18											
	大车 Trolley		P43											
电源 Power source			三相交流 380V 50HZ 3-phase A.c 380V 50HZ											

注：表中H0为大车缓冲器的增加高度 H0≤250

注：表中H0为大车缓冲器的增加高度 H0≤250



卫华集团
WEIHUA
CRANE

(5+5)t~(25+25)t 挂梁桥式起重机(垂直主梁方向)

Overhead crane with carrier-beam(plumbing with the beam) Cap. (5+5)t-(25+25)t

起重量 Lifting capacity			t	7.5+7.5											
跨度 Span			m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5				
最大起升高度 Max Lifting Height				16											
速度 Speed	起升 Hoisting	A5	m/min	10.4											
		A6		15.3											
	小车运行 crab travelling			44.6											
	大车运行 Trolley travelling	A5		84.7				87.6							
A6		112.5				101.4									
电动机 Motor	起升 Hoisting	A5	型号 Type/Kw	YZR225M-6/34											
		A6		YZR280S-8/45											
	小车运行 crab travelling			YZR132M2-6/4											
	大车运行 Trolley travelling	A5		YZR160M1-6/6.3×2				YZR160M2-6/8.5×2							
A6		YZR160M2-6/7.5×2				YZR160L-6/11×2									
主要尺寸 Main Dimensions			A5	B	8440		8444		8934						
				W	6500		6600		7500						
				B1	1230		1182		817						
				B2	710		662		617						
				B3	1490				1565						
				B5	1256	1281	1306	1331		1356					
				B6	2230		2232		2317						
				B7	1710		1712		2117						
				Lx	4500±2										
				C	2500										
				D	2500~5000										
				E	1400										
				H	2095		2185								
				H1	850+H0		940+H0								
				H2	180	380	340	488	638	788	938				
				H3	2620	2650	2720	2868	3018	3168	3318				
				b	230		260								
			A6	B	8774				9504						
				W	6900				7500						
				B1	1262				1317						
				B2	612				687						
				B3	1490				1565						
				B5	1256	1281	1306	1331		1356					
				B6	2462				2817						
				B7	1812				2187						
				Lx	4500±2										
				C	2500										
				D	2500~5000										
				E	1400										
				H	2095	2097	2187	2185							
				H1	850+H0		940+H0								
				H2	180	280	340	490	640	790	940				
				H3	2670	2650	2720	2870	3020	3170	3320				
				b	230		260								
				重量 Weight	小车 Crab	A5	t	7.1							
						A6		7.3							
总重 Total Weight	A5	20.8	22.1		24.7	28.3		30.9	35.3	38.5	41.7				
	A6	21.9	23.4		25.6	30.1		32.7	36.7	40.3	43.9				
最大轮压 Max.wheel Load		A5	KN	144	151	158	172	179	191	201	210				
		A6		149	156	164	177	185	196	207	217				
荐用钢轨 Steel track Recommended	小车 Crab	P24													
	大车 Trolley											P43			
电源 Power source		三相交流 380V 50HZ 3-phase A.C. 380V 50HZ													

注：表中H0为大车缓冲器的增加高度 H0≤250

注：表中H0为大车缓冲器的增加高度 H0≤250



中国驰名商标



中国名牌产品

(5+5)t~(25+25)t 挂梁桥式起重机(垂直主梁方向)

Overhead crane with carrier-beam(plumbing with the beam) Cap.(5+5)t-(25+25)t

起重量 Lifting capacity				t	10+10												
跨度 Span				m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5					
最大起升高度 Max lifting Height					16												
速度 Speed	起升 Hoisting	A5	m/min		10.4												
		A6		15.2													
	小车运行 crab travelling			44.6													
	大车运行 Trolley travelling	A5		84.7				87.6									
		A6		112.5				101.4									
电动机 Motor	起升 Hoisting	A5	型号 Type/Kw	YZR250M ₁ -6/42													
		A6		YZR280M-8/55													
	小车运行 crab travelling			YZR132M ₂ -6/4													
	大车运行 Trolley travelling	A5		YZR160M ₂ -6/6.3×2				YZR160M ₂ -6/8.5×2									
		A6		YZR160M ₂ -6/7.5×2				YZR160L-6/11×2									
主要尺寸 Main Dimensions				A5	B	8440			8444		8934						
					W	6500			6600		7500						
					B1	1230			1182		817						
					B2	710			662		617						
					B3	1490			1565								
					B5	1256	1281		1306	1331		1356					
					B6	2230			2232		2317						
					B7	1710			1712		2117						
					Lx	4500±2											
					C	2500											
					D	2500~5000											
					E	1800											
					H	2097					2187						
					H1	850+H0					940+H0						
					H2	180	182	282	342	490	640	790	940				
					H3	2620	2622	2652	2732	2870	3020	3170	3320				
					b	230			260								
				A6	B	8774					9504						
					W	6900					7500						
					B1	1262					1317						
					B2	612					687						
					B3	1490			1565								
					B5	1256	1281		1306	1331		1356					
					B6	2462					2817						
					B7	1812					2187						
					Lx	4500±2											
					C	2500											
					D	2500~5000											
					E	1800											
					H	2097	2099			2189							
					H1	850+H0					940+H0						
					H2	180	184	284	344	492	642	742	942				
					H3	2670	2674	2654	2724	2872	3022	3172	3322				
					b	230			260								
重量 Weight	小车 Crab	A5	t	7.5													
		A6		7.9													
	总重 Total weight	A5		22.6	24.1	26.4	30.7	33.4	37.8	40.6	44.8						
		A6		23.7	25.6	28.0	32.6	35.5	39.9	43.8	47.6						
最大轮压 Max wheel load		A5	kN	172	178	187	201	210	223	234	244						
		A6		176	183	192	207	216	230	241	252						
荐用钢轨 Steel track Recommended		小车 Crab	P24														
		大车 Trolley	P43或QU70														
电源 Power source				三相交流 380V 50Hz 3-Phase A.C 380V 50Hz													

注：表中H0为大车缓冲器的增加高度 H0≤250

注：表中H0为大车缓冲器的增加高度 H0≤250



卫华集团
WEIHUA
CRANE

(5+5)t~(25+25)t 挂梁桥式起重机(垂直主梁方向)

Overhead crane with carrier-beam(plumbing with the beam) Cap.(5+5)t-(25+25)t

起重量 Lifting capacity					t		16+16																		
跨度 Span					m		10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5											
最大起升高度 Max lifting Height							16																		
速度 Speed	起升 Hoisting	A5	m/min	9.8																					
		A6		12.4																					
	小车运行 crab travelling			42.4																					
	大车运行 Trolley travelling	A5		87				74.2		74.6															
A6		101.4				101.8		86.8																	
电动机 Motor	起升 Hoisting	A5		型号 Type/Kw	YZR280M-8/63																				
		A6			YZR315M-8/90																				
	小车运行 crab travelling				YZR160M ₁ -6/6.3																				
	大车运行 Trolley travelling	A5			YZR160M ₁ -6/8.5×2						YZR160L-6/13×2														
		A6			YZR160L-6/11×2						YZR180L-8/11×2														
					YZR160M ₁ -6/8.5×2						YZR180L-8/11×2														
主要尺寸 Main Dimensions														B	8474			8620		8924					
														W	6650			6700		7000					
														B1	1212			1260		1262					
														B2	612			660		662					
														B3	1540					1590					
														B5	1281		1306		1331		1356		1381		
														B6	2287			2360		2512					
														B7	1687			1760		1912					
														Lx	4500±2										
														C	2500										
														D	2500~5000										
														E	1800										
														H	2343	2345			2475						
														H1	940+H0				1035+H0			1070+H0			
														H2	190	194	344	364	514	664	814	914			
														H3	2620	2624	2714	2744	2894	3044	3194	3294			
														b	260				300						
														B	8574			8744		9004					
														W	6650			6700		7000					
														B1	1262			1312							
														B2	662			732							
														B3	1540			1590							
														B5	1381		1406		1431		1456		1481		
														B6	2337			2412		2562					
														B7	1737			1832		1982					
														Lx	4500±2										
														C	2500										
														D	2500~5000										
														E	1800										
														H	2343	2347			2477						
														H1	940+H0				1070+H0						
														H2	190	196	346	366	516	666	816	916			
														H3	2680	2686	2716	2746	2896	3046	3196	3296			
														b	260				300						
														重量 Weight	小车 Crab	A5	t	13.2							
A6	14.1																								
总重 Total weight	A5	31	32.2	36.3	39.9	44.3	49.5	53.9	57.5																
	A6	32.1	33.2	37.7	43	47.4	51.6	55.2	60																
最大轮压 Max wheel load		A5	kN	251	264	277	292	305	324	337	348														
		A6		256	270	283	301	316	331	342	357														
荐用钢轨 Steel track Recommended		小车 Crab		P43																					
		大车 Trolley		P43或QU70																					
电源 Power source		三相交流 380V 50Hz 3-Phase A.C 380V 50Hz																							

注：表中H0为大车缓冲器的增加高度 H0≤250

注: 表中H0为大车缓冲器的增加高度 H0≤250



中国驰名商标



中国名牌产品

(5+5)t~(25+25)t 挂梁桥式起重机(垂直主梁方向)

Overhead crane with carrier-beam(plumbing with the beam) Cap.(5+5)t-(25+25)t



卫华集团
WEIHUA
CRANE

起重量 Lifting capacity				t	25+25									
跨度 Span				m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5		
最大起升高度 Max lifting Height					12									
速度 Speed	起升 Hoisting	A5	m/min	7.8										
		A6		13										
	小车运行 crab travelling			38.5										
	大车运行 Trolley travelling			A5	74.6			86						
		A6		86.6			87.3							
电动机 Motor	起升 Hoisting	A5	型号 Type/Kw	YZR315S-8/85										
		A6		YZR355L-10/110										
	小车运行 crab travelling			YZR160M-6/8.5										
	大车运行 Trolley travelling			A5	YZR160L-6/13×2				YZR200L-8/18.5×2					
				A6	YZR180L-8/11×2				YZR200L-8/15×2					
主要尺寸 Main Dimensions			A5	B	8724			8842			9144			
				W	6800						7000			
				B1	1262			1312			1362			
				B2	662			712			782			
				B3	1590									
				B5	1281		1306		1331			1356		1381
				B6	2412			2462			2612			
				B7	1812			1862			2032			
				Lx	4500±2									
				C	2300									
				D	2300~4500									
				E	2000									
				H	2726			2732						
				H1	1090+H0									
				H2	21	196	202	352	502	652	802	902		
			H3	2631	2626	2632	2732	2882	3032	3182	3282			
			b	300										
			A6	B	8944			1590			9024			
				W	6800						7000			
				B1	1362			1312						
				B2	782			712						
				B3	1540			1590						
				B5	1281		1306		1331			1356		1381
				B6	2512			2562						
				B7	1932			1962						
				Lx	4500±2									
				C	2300									
				D	2300~4500									
				E	2000									
				H	2726	2728			2734					
				H1	1090+H0						1130+H0			
				H2	21	198	204	354	504	654	804	904		
H3	2631	2628		2634	2734	2884	3034	3184	3284					
b	300													
重量 Weight	小车 Crab	A5	t	16.7										
		A6		17.1										
	总重 Total weight	A5		38.2	40.7	45.1	49.3	53.3	59	63.1	68.5			
		A6		40	43	47.2	51.8	56	62	66	71.8			
最大轮压 Max wheel load		A5	kN	353	374	393	407	427	437	459	476			
		A6		356	377	397	415	433	443	466	483			
荐用钢轨 Steel track Recommended		小车 Crab 大车 Trolley			P43 QU80或方钢100									
电源 Power source					三相交流 380V 50Hz 3-Phase A.C 380V 50Hz									

注：表中H0为大车缓冲器的增加高度 H0≤250

注：表中H0为大车缓冲器的增加高度 H0≤250