

Swaged Rope Welded Fork
Tension Rope.

叉式拉索

- 316 grade stainless steel.
316级不锈钢

Rope (mm)	b (mm)	w (mm)	g (mm)	h (mm)	f (mm)		
					Diameter Before swaged	Key width After swaging	Tol
3 mm	65	6	7.5	10	6.35	5.3	0-0.12
4 mm	77	8	11	11	7.5	6.2	
5 mm	88	9	12	14	9	7.5	
6 mm	106	12	14	20	12.6	10.6	0-0.17
8 mm	145	16	17	26	16	13.6	0-0.2
10 mm	150	19	20	30	18	14.8	




TALURIT equipment and technical support.
瑞典TALURIT设备和技术支持

叉-叉带拉紧器 Fork - Fork with Turnbuckle



Part No.	Rope	L
24366-03	3 mm	custom
24366-04	4 mm	
24366-05	5 mm	
24366-06	6 mm	
24366-08	8 mm	
24366-10	10 mm	

叉-叉 Fork - Fork

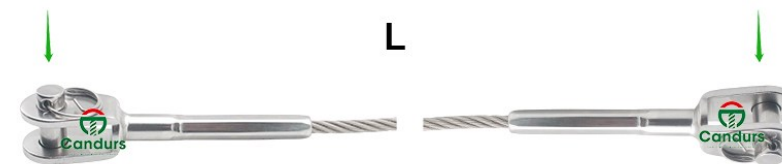

Part No.	Rope	L
24343-03	3 mm	custom
24343-04	4 mm	
24343-05	5 mm	
24343-06	6 mm	
24343-08	8 mm	
24343-10	10 mm	