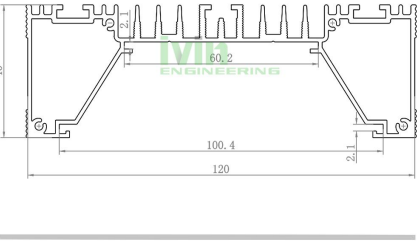





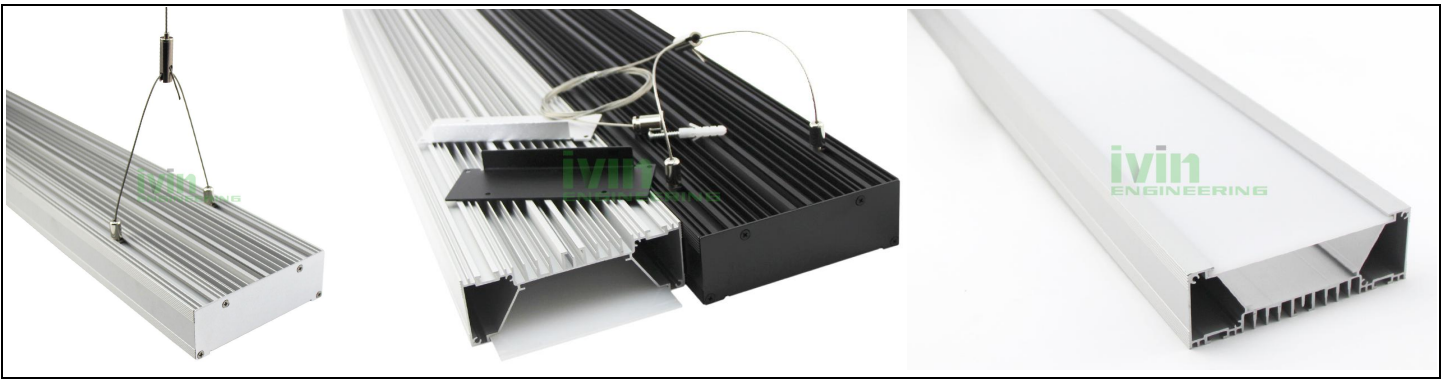


LED pendant light housing: D-12040 (May.2016)

Article	Specification	Photo	Unit	Unit Price		
				20 Pcs	300 Pcs	1500 Pcs
Aluminum profile. Fit 60mm width * 2mm thickness PCB. Power: 80W / M by using SMD LEDs. Silver / Black anodize finish. (Add USD0.6 / M for black anodize.) Weight: 1630g / M.	600mm		1M			
	900mm					
	1000mm					
	1200mm					
	1500mm					
Diffused PS cover plate . Width 100mm * Thickness 2mm. about 85% light transmittance. Weight: 200g / M.	598*100*2mm		998mm			
	898*100*2mm					
	998*100*2mm					
	1198*100*2mm					
	1498*100*2mm					
Aluminum end cap. (each end to use 1 Piece.) Sand blast + silver / black anodize. With 8Pcs M3*12 S.S. Screws. Weight: 50g / 2 Pcs.	120*40mm		2 Pcs	US\$20.75	US\$19.85	US\$18.65
Pendant System. 1.2mm Diameter * 1.5 M lenght steel rope - adjustable. 2 Clips to hold the housing. Other main parts are copper material with nickle plating. Can stand 20KG + weight. 120g / 2 set. each end to use 1 set.)	1.5M		2 Sets			
Aluminum install bracket. (Commonly used by D-100) AL1050 aluminum plate, 100# sand balst + silver anodize finish. + 4 M6 screw + 4 M6 nut. Can hold about 10kg each piece. 150g	H:245mm W:47mm T:3mm		1 Piece	US\$3.20	US\$3.00	US\$2.80
60W PCB (to fit 0.6M heat sink) 112Pcs 5730 LEDs. Base Material: Aluminum Layer: 1 layer Thermal conductivity: 1.5W/m.k Copper layer: 1oz Solder Mask: White Silkscreen: Yellow Surface finish: Leadfree hot air solder leveling. Outline Profile: CNC routing 100g / Piece	Board Dimension: 580*40*2mm		1 Piece	US\$3.75	US\$3.50	US\$3.20



Notes:

1: MOQ: 20 sets.

2: Above price on basis of Ex-factory.

3: Payment Terms: T/T , 50% Deposit and 50% balance before delivery.

4: Customer length be available.

5: Price validity: 1 month.
