


SPT Wire

Ours Lamp Cord is suitable for lamps, clocks, household fans and small appliances where not subjected to hard usage (SPT-1 and SPT-2). Two conductors cord for use as internal wiring of air conditioning and refrigeration equipment. Three conductors cord for power supply to domestic refrigeration equipment and window type air conditioners (SPT-3). Lamp Cord is suitable for use at temperatures not exceeding minimum -20°C or maximum 105°C.

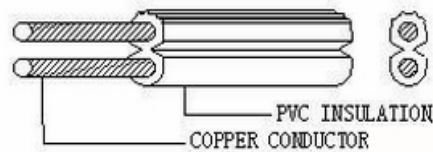

Reference Standard: UL 62, NEC Article 400, CSA 22-2 NO.49		Rated Voltage: 300V	Rated Temperature: 60°C –105°C	
Conductor: Stranded Bare Copper			Insulation : PVC	
Type	AWG/No.of cores	NO./Normal Diameter of strand(mm)	Normal Thickness of Insulation(mm)	Over Diameter of Cable(mm)
SPT-3	18 x 2c	41/0.16	1.52	4.4 x 8.7
	16 x 2c	65/0.16	1.52	4.8 x 9.5
	14 x 2c	41/0.254	2.03	6.0 x 12.0
	12 x 2c	65/0.254	2.41	7.4 x14.0
	10 x 2c	105/0.254	2.79	9.1x18.2
	18 x 3c	41/0.16	1.52	4.4 x 10.7
	16 x 3c	65/0.16	1.52	4.8 x 11.8
	14 x 3c	41/0.254	2.03	6.0 x 14.5
	12 x 3c	65/0.254	2.41	7.4x16.5
SPT-2	10 x 3c	105/0.254	2.79	9.1 x 18.8
	18 x 2c	41/0.16	1.14	3.4 x 6.8
	16 x 2c	65/0.16	1.14	3.7 x 7.4
	18 x 3c	41/0.16	1.14	3.5 x 8.6
SPT-1	16 x 3c	65/0.16	1.14	3.8 x 9.6
	20 x 2c	21/0.18	0.78	2.55 x 5.1
	18 x 2c	41/0.16	0.76	2.7 x 5.4
	18 x 3c	41/0.16	0.76	2.7 x 8.0

Cable printing:
TIANJIECABLE (UL) E476654 SPT-3 60°C *C/*AWG 300V VW-1 ***FT

