




浙江天杰实业股份有限公司
ZHEJIANG TIANJIE INDUSTRIAL CORP.

Add: Linglong Economic Development Zone,
Lin'an Hangzhou, Zhejiang, China P.C.: 311301
Tel: +86-571-23656057 Fax: +86-571-23656098

Mobile: +86-13819127997
http://www.tianjecable.com
E-mail: will@tianjecable.com

RVV Cable

Specifications: RVV cable, Copper Conductor PVC insulated PVC Sheathed Round Cable
Application: General purpose indoor and outdoor, power cords for electrical tools and appliance.
Standard: 227IEC, BS6500
Conductor: Copper Conductor
Rated Voltage: 300/300V, 300/500V
Package: Coils, Plywood reel, drum
Temperature Range: -20°C to +70°C

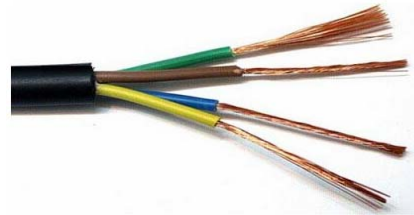

SPEC.	Normal Area mm2	Conductor Structure mm	Thickness of Insulation mm	Thickness of sheath mm	Approx. overall Dia. mm
300/300V	2x0.5	28x0.15	0.5	0.6	5.1
	2x0.75	24x0.20	0.5	0.6	5.6
	3x0.5	28x0.15	0.5	0.6	5.4
	3x0.75	24x0.20	0.5	0.6	5.9
	2x0.75	24x0.20	0.6	0.8	6.4

SPEC.	Normal Area mm2	Conductor Structure mm	Thickness of Insulation mm	Thickness of sheath mm	Approx. overall Dia. mm
300/500V	2x1.0	32x0.20	0.6	0.8	6.7
	2x1.5	48x0.20	0.7	0.8	7.7
	2x2.5	77x0.20	0.8	1	9.3
	3x0.75	24x0.20	0.6	0.8	6.8
	3x1.0	32x0.20	0.6	0.8	7.1
	3x1.5	48x0.20	0.7	0.9	8.3
	3x2.5	77x0.20	0.8	1	9.8
	4x1.0	32x0.20	0.6	0.9	7.9
	4x1.5	48x0.20	0.7	1	9.3
	4x2.5	77x0.20	0.8	1.1	11
	5x1.5	48x0.20	0.7	1.1	10.3
	5x2.5	77x0.20	0.8	1.2	12.2

