


# 0.3mm间距卧贴FFC连接器参数表



0.3A-WTX-nP



0.3A-WTX-nP



	27P	17P
A	10.65	7.65
B	9.20	6.20
C	7.80	4.60
D	7.20	4.20

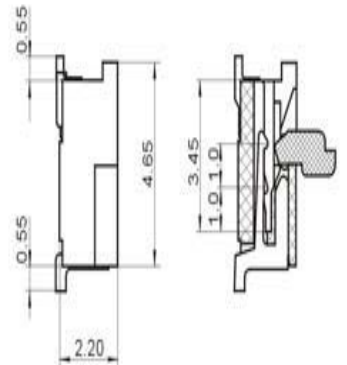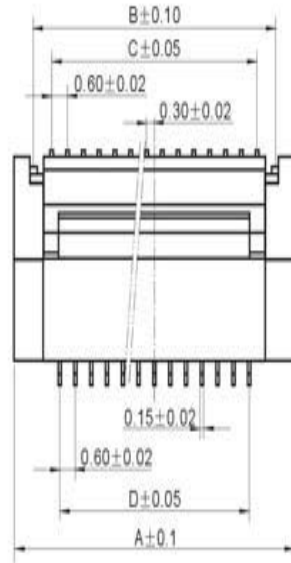

0.3A-WTX-nP

- 间距 (Pitch)
- 型号:(Model)
- 卧式:W
- Horizontal pype:W
- 贴式:T
- SMT:T
- 下接点:X(上接点:S)
- Bottom of contact:X(Top of contact: S)
- 线数 (Hole location)

## 接触件


\* 材质: 磷青铜

## 塑胶本体

\* 材质: 尼龙46, UL94V-0

## 包装方式

- \* 编带包装
- \* 管装
- \* 袋装

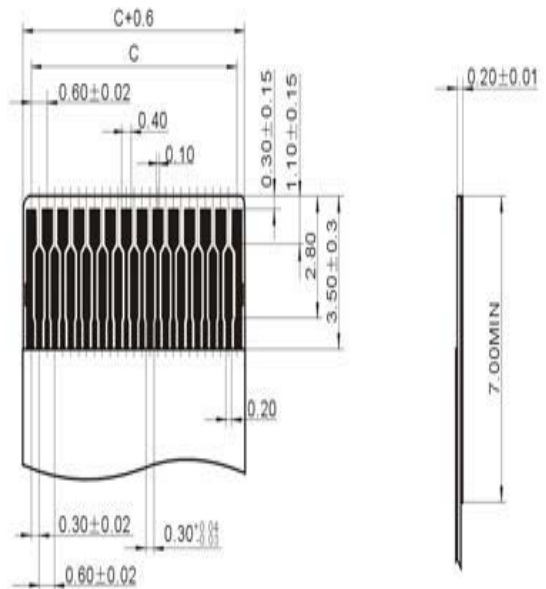

适用FFC寸法  
Applicable FFC

## 技术参数

- \* 极数: 4 ~ 40
- \* 额定电压: AC、DC、200V (50HZ有效值)
- \* 额定电流: > 0.5A 、 AC、 DC
- \* 耐压值: 500V AC/minute
- \* 工作温度: -25℃ ~+ 85℃
- \* 绝缘电阻:  $\geq 800\text{M}\Omega$
- \* 接触电阻:  $\leq 0.02\Omega$
- \* 单面接触