


Electrical Characteristics:

- Current rating: 0.4A AC/DC
- Voltage rating: 50V AC/DC
- Temperature range: -25°C~+85°C
- Withstand Voltage: 200V AC/Minute
- Contact Resistance: $\leq 20m\Omega$
- Insulation resistance: $\geq 500m\Omega$
- Relative Humidity: 93%+40°C

Material Description:

- Terminal: Phosphor Bronze Tin-Leadplated
- Housing: Thermoplastic(UL94V-0)
- Latch: Thermoplastic(UL94V-0)

- NOTES:**
1. PLASTIC BURRS 0.1mm MAX
 2. PART NO. SPECIFICATION: 11-57-XX01-X2

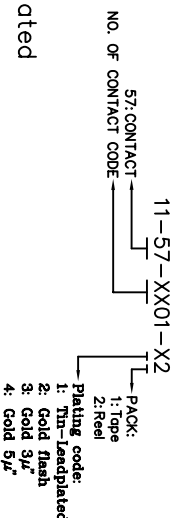

NO.	A	B	C	D
4	3.00	5.10	9.05	11.00
5	4.00	6.10	10.05	12.00
6	5.00	7.10	11.05	13.00
7	6.00	8.10	12.05	14.00
8	7.00	9.10	13.05	15.00
9	8.00	10.10	14.05	16.00
10	9.00	11.10	15.05	17.00
11	10.00	12.10	16.05	18.00
12	11.00	13.10	17.05	19.00
13	12.00	14.10	18.05	20.00
14	13.00	15.10	19.05	21.00
15	14.00	16.10	20.05	22.00
16	15.00	17.10	21.05	23.00
17	16.00	18.10	22.05	24.00
18	17.00	19.10	23.05	25.00
19	18.00	20.10	24.05	26.00
20	19.00	21.10	25.05	27.00
21	20.00	22.10	26.05	28.00
22	21.00	23.10	27.05	29.00
23	22.00	24.10	28.05	30.00
24	23.00	25.10	29.05	31.00
25	24.00	26.10	30.05	32.00
26	25.00	27.10	31.05	33.00
27	26.00	28.10	32.05	34.00
28	27.00	29.10	33.05	35.00
29	28.00	30.10	34.05	36.00
30	29.00	31.10	35.05	37.00

东莞市宽拓电子科技有限公司
 Dongguan Kuantuo Electronics Co., Ltd

APPROVED	DATE	PART NO.
		11-57-XX01-X2
CHECKED	DATE	DRAWING NO.
		JB96*13001
DRAWN	DATE	COMPUTER NO.
物大宽	2008/03/15	RD1300101
NUMBER	SCALE	SIZE
81	A3	2F SA TPE SHI COM

SER	AREA	REVISIONS	CHK	DATE

UNLESS OTHERWISE SPECIFIED	TOLERANCES ARE
XX	±0.15
XXX	±0.10
X.XXX	
ANG.	±0.30°

UNITS: MM
 DIMENSIONS: FRACTIONS
 DECIMALS: MM