


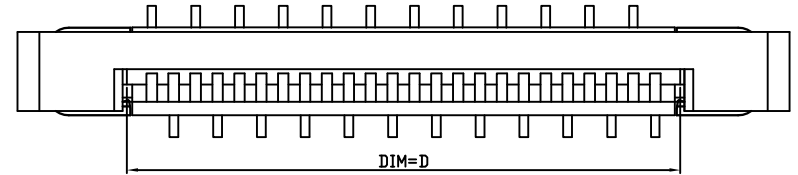
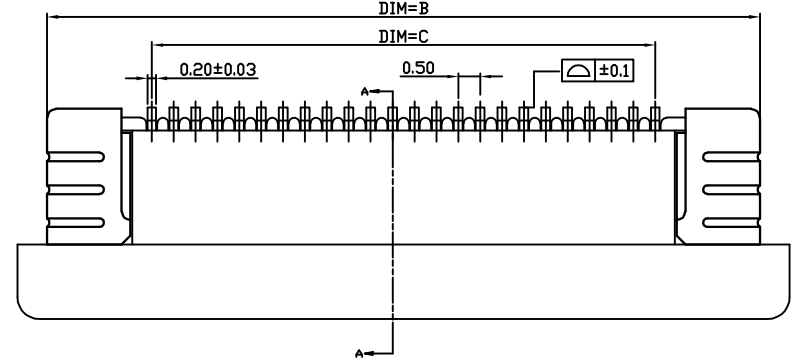
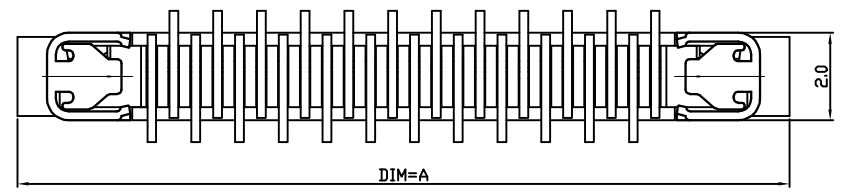


	1	2	3	4	5	6	7	8	9	10
PIN数	DIM=A	DIM=B	DIM=C	DIM=D	DIM=E					
60P	35.6	34.5	29.50	30.60	4.9					
59P	35.1	34.0	29.00	30.10						
58P	34.6	33.5	28.50	29.60						
57P	34.1	33.0	28.00	29.10						
56P	33.6	32.5	27.50	28.60						
55P	33.1	32.0	27.00	28.10						
54P	32.6	31.5	26.50	27.60						
53P	32.1	31.0	26.00	27.10						
52P	31.6	30.5	25.50	26.60						
51P	31.1	30.0	25.00	26.10						
50P	30.6	29.5	24.50	25.60	4.4					
49P	30.1	29.0	24.00	25.10						
48P	29.6	28.5	23.50	24.60						
47P	29.1	28.0	23.00	24.10						
46P	28.6	27.5	22.50	23.60						
45P	28.1	27.0	22.00	23.10						
44P	27.6	26.5	21.50	22.60						
43P	27.1	26.0	21.00	22.10						
42P	26.6	25.5	20.50	21.60						
41P	26.1	25.0	20.00	21.10						
40P	25.6	24.5	19.50	20.60	4.4					
39P	25.1	24.0	19.00	20.10						
38P	24.6	23.5	18.50	19.60						
37P	24.1	23.0	18.00	19.10						
36P	23.6	22.5	17.50	18.60						
35P	23.1	22.0	17.00	18.10						
34P	22.6	21.5	16.50	17.60						
33P	22.1	21.0	16.00	17.10						
32P	21.6	20.5	15.50	16.60						
31P	21.1	20.0	15.00	16.10						
30P	20.6	19.5	14.50	15.60	4.4					
29P	20.1	19.0	14.00	15.10						
28P	19.6	18.5	13.50	14.60						
27P	19.1	18.0	13.00	14.10						
26P	18.6	17.5	12.50	13.60						
25P	18.1	17.0	12.00	13.10						
24P	17.6	16.5	11.50	12.60						
23P	17.1	16.0	11.00	12.10						
22P	16.6	15.5	10.50	11.60						
21P	16.1	15.0	10.00	11.10						
20P	15.6	14.5	9.50	10.60	4.4					
19P	15.1	14.0	9.00	10.10						
18P	14.6	13.5	8.50	9.60						
17P	14.1	13.0	8.00	9.10						
16P	13.6	12.5	7.50	8.60						
15P	13.1	12.0	7.00	8.10						
14P	12.6	11.5	6.50	7.60						
13P	12.1	11.0	6.00	7.10						
12P	11.6	10.5	5.50	6.60						
11P	11.1	10.0	5.00	6.10						
10P	10.6	9.5	4.50	5.60	4.4					
9P	10.1	9.0	4.00	5.10						
8P	9.6	8.5	3.50	4.60						
7P	9.1	8.0	3.00	4.10						
6P	8.6	7.5	2.50	3.60						
5P	8.1	7.0	2.00	3.10						
4P	7.6	6.5	1.50	2.60						

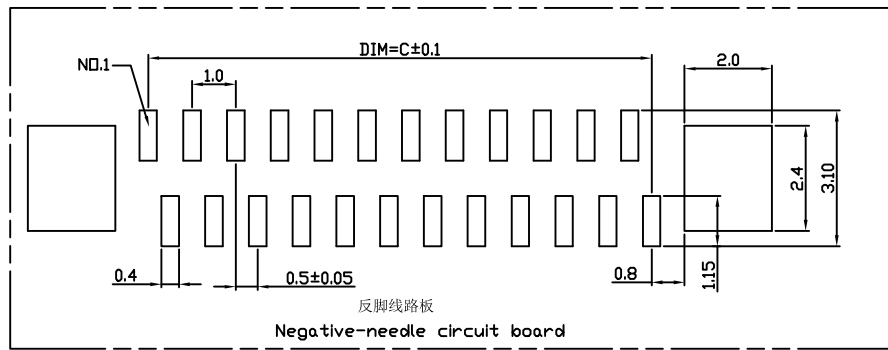


**Electrical Characteristics:**  
 Current rating: 0.4A AC/DC  
 Voltage rating: 50V AC/DC  
 Temperature range: -25°C ~ +85°C  
 Withstand Voltage: 200V AC/Minute  
 Contact Resistance: ≤ 20mΩ  
 Insulation resistance: ≥ 500mΩ  
 Relative Humidity: 93%+40°C

**Material Description:**  
 Terminal: Phosphor Bronze Tin-Leadplated  
 Fitting Nail: Brass Tin-plated  
 Housing: Thermoplastic(UL94V-0)  
 Slider: Thermoplastic(UL94V-0)

**NOTES:**  
 1.PLASTIC BURRS 0.1mm MAX  
 2.PART NO. SPECIFICATION:

11-56-XX01-12  
 PACK:  
 1:Tape  
 2:Reel  
 Plating code:  
 1: Tin-Leadplated  
 2: Gold flash  
 3: Gold 3μ"  
 4: Gold 5μ"

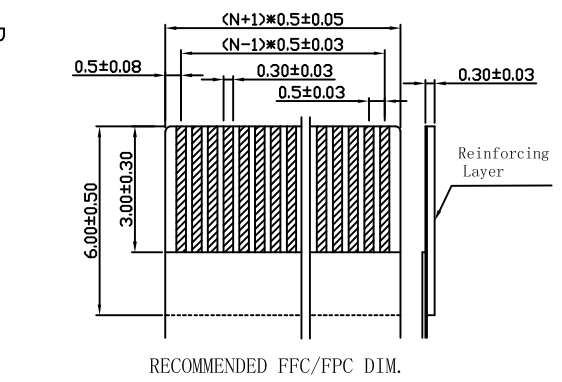

**东莞市宽拓电子科技有限公司**  
**Dongguan Kuantuo Electronics Co.,Ltd**

				UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		APPROVED	DATE	PART NO	11-56-XX01-12
				X.X ±0.15		CHECKED	DATE	DRAWING NO	JB96*08005
				X.XX ±0.05		DRAWN		COMPUTER NO	RD0800501
				X.XXX		DATE			
				ANG. ±0° 30'		杨大宽 2008/09/25			
				UNIT		NUMBER	SCALE	NAME	FPC 0.5 CONNECTOR H2.0
				SER	AREA	1/1	8:1	SIZE	ZIF FOR SMT (Negativ Upright TYPE)
				REVISIONS	CHK	DATE		REV	A