
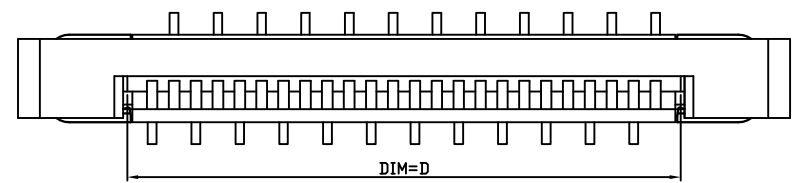
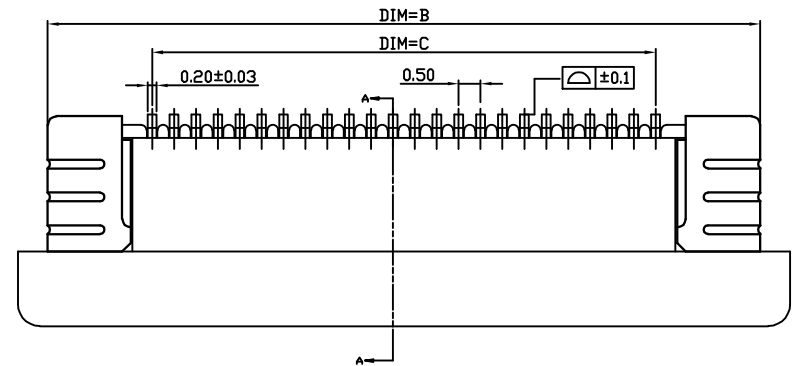


|   | 1    | 2     | 3     | 4     | 5     | 6     | 7 | 8 | 9 | 10 |
|---|------|-------|-------|-------|-------|-------|---|---|---|----|
|   | PIN数 | DIM=A | DIM=B | DIM=C | DIM=D | DIM=E |   |   |   |    |
| J | 60P  | 35.6  | 34.5  | 29.50 | 30.60 |       |   |   |   |    |
|   | 59P  | 35.1  | 34.0  | 29.00 | 30.10 |       |   |   |   |    |
|   | 58P  | 34.6  | 33.5  | 28.50 | 29.60 |       |   |   |   |    |
|   | 57P  | 34.1  | 33.0  | 28.00 | 29.10 |       |   |   |   |    |
| I | 56P  | 33.6  | 32.5  | 27.50 | 28.60 |       |   |   |   |    |
|   | 55P  | 33.1  | 32.0  | 27.00 | 28.10 |       |   |   |   |    |
|   | 54P  | 32.6  | 31.5  | 26.50 | 27.60 |       |   |   |   |    |
|   | 53P  | 32.1  | 31.0  | 26.00 | 27.10 |       |   |   |   |    |
|   | 52P  | 31.6  | 30.5  | 25.50 | 26.60 |       |   |   |   |    |
|   | 51P  | 31.1  | 30.0  | 25.00 | 26.10 |       |   |   |   |    |
| H | 50P  | 30.6  | 29.5  | 24.50 | 25.60 | 4.9   |   |   |   |    |
|   | 49P  | 30.1  | 29.0  | 24.00 | 25.10 |       |   |   |   |    |
|   | 48P  | 29.6  | 28.5  | 23.50 | 24.60 |       |   |   |   |    |
|   | 47P  | 29.1  | 28.0  | 23.00 | 24.10 |       |   |   |   |    |
|   | 46P  | 28.6  | 27.5  | 22.50 | 23.60 |       |   |   |   |    |
|   | 45P  | 28.1  | 27.0  | 22.00 | 23.10 |       |   |   |   |    |
| G | 44P  | 27.6  | 26.5  | 21.50 | 22.60 |       |   |   |   |    |
|   | 43P  | 27.1  | 26.0  | 21.00 | 22.10 |       |   |   |   |    |
|   | 42P  | 26.6  | 25.5  | 20.50 | 21.60 |       |   |   |   |    |
|   | 41P  | 26.1  | 25.0  | 20.00 | 21.10 |       |   |   |   |    |
|   | 40P  | 25.6  | 24.5  | 19.50 | 20.60 |       |   |   |   |    |
|   | 39P  | 25.1  | 24.0  | 19.00 | 20.10 |       |   |   |   |    |
|   | 38P  | 24.6  | 23.5  | 18.50 | 19.60 |       |   |   |   |    |
|   | 37P  | 24.1  | 23.0  | 18.00 | 19.10 |       |   |   |   |    |
| F | 36P  | 23.6  | 22.5  | 17.50 | 18.60 |       |   |   |   |    |
|   | 35P  | 23.1  | 22.0  | 17.00 | 18.10 |       |   |   |   |    |
|   | 34P  | 22.6  | 21.5  | 16.50 | 17.60 |       |   |   |   |    |
|   | 33P  | 22.1  | 21.0  | 16.00 | 17.10 |       |   |   |   |    |
|   | 32P  | 21.6  | 20.5  | 15.50 | 16.60 |       |   |   |   |    |
|   | 31P  | 21.1  | 20.0  | 15.00 | 16.10 |       |   |   |   |    |
| E | 30P  | 20.6  | 19.5  | 14.50 | 15.60 |       |   |   |   |    |
|   | 29P  | 20.1  | 19.0  | 14.00 | 15.10 |       |   |   |   |    |
|   | 28P  | 19.6  | 18.5  | 13.50 | 14.60 |       |   |   |   |    |
|   | 27P  | 19.1  | 18.0  | 13.00 | 14.10 |       |   |   |   |    |
|   | 26P  | 18.6  | 17.5  | 12.50 | 13.60 |       |   |   |   |    |
|   | 25P  | 18.1  | 17.0  | 12.00 | 13.10 |       |   |   |   |    |
| D | 24P  | 17.6  | 16.5  | 11.50 | 12.60 |       |   |   |   |    |
|   | 23P  | 17.1  | 16.0  | 11.00 | 12.10 |       |   |   |   |    |
|   | 22P  | 16.6  | 15.5  | 10.50 | 11.60 |       |   |   |   |    |
|   | 21P  | 16.1  | 15.0  | 10.00 | 11.10 |       |   |   |   |    |
|   | 20P  | 15.6  | 14.5  | 9.50  | 10.60 |       |   |   |   |    |
|   | 19P  | 15.1  | 14.0  | 9.00  | 10.10 | 4.4   |   |   |   |    |
| C | 18P  | 14.6  | 13.5  | 8.50  | 9.60  |       |   |   |   |    |
|   | 17P  | 14.1  | 13.0  | 8.00  | 9.10  |       |   |   |   |    |
|   | 16P  | 13.6  | 12.5  | 7.50  | 8.60  |       |   |   |   |    |
|   | 15P  | 13.1  | 12.0  | 7.00  | 8.10  |       |   |   |   |    |
|   | 14P  | 12.6  | 11.5  | 6.50  | 7.60  |       |   |   |   |    |
|   | 13P  | 12.1  | 11.0  | 6.00  | 7.10  |       |   |   |   |    |
| B | 12P  | 11.6  | 10.5  | 5.50  | 6.60  |       |   |   |   |    |
|   | 11P  | 11.1  | 10.0  | 5.00  | 6.10  |       |   |   |   |    |
|   | 10P  | 10.6  | 9.5   | 4.50  | 5.60  |       |   |   |   |    |
|   | 9P   | 10.1  | 9.0   | 4.00  | 5.10  |       |   |   |   |    |
|   | 8P   | 9.6   | 8.5   | 3.50  | 4.60  |       |   |   |   |    |
|   | 7P   | 9.1   | 8.0   | 3.00  | 4.10  |       |   |   |   |    |
|   | 6P   | 8.6   | 7.5   | 2.50  | 3.60  |       |   |   |   |    |
|   | 5P   | 8.1   | 7.0   | 2.00  | 3.10  |       |   |   |   |    |
| A | 4P   | 7.6   | 6.5   | 1.50  | 2.60  |       |   |   |   |    |

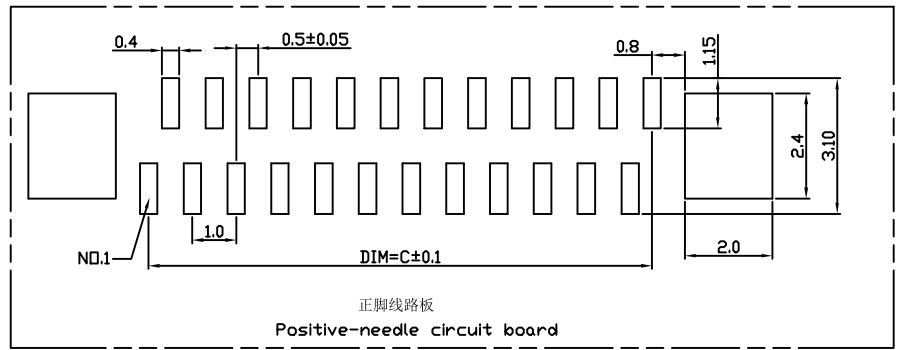


**Electrical Characteristics:**  
 Current rating: 0.4A AC/DC  
 Voltage rating: 50V AC/DC  
 Temperature range: -25°C ~ +85°C  
 Withstand Voltage: 200V AC/Minute  
 Contact Resistance: ≤ 20mΩ  
 Insulation resistance: ≥ 500mΩ  
 Relative Humidity: 93%+40°C

**Material Description:**  
 Terminal: Phosphor Bronze Tin-Leadplated  
 Fitting Nail: Brass Tin-plated  
 Housing: Thermoplastic(UL94V-0)  
 Slider: Thermoplastic(UL94V-0)

**NOTES:**  
 1.PLASTIC BURRS 0.1mm MAX  
 2.PART NO. SPECIFICATION:  
 11-55-XX01-12

PACK:  
 1:Tape  
 2:Reel  
 Plating code:  
 1: Tin-Leadplated  
 2: Gold flash  
 3: Gold 3μ"  
 4: Gold 5μ"

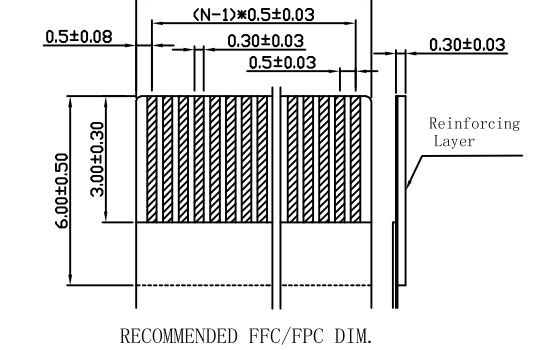

**东莞市宽拓电子科技有限公司**  
**Dongguan Kuantuo Electronics Co.,Ltd**

|   |          |            |                                     |                        |
|---|----------|------------|-------------------------------------|------------------------|
| UNLESS OTHERWISE SPECIFIED TOLERANCES ARE<br>X.X ±0.15<br>X.XX ±0.05<br>X.XXX<br>ANG. ±0° 30' | APPROVED | DATE       | PART NO                             | 11-55-XX01-12          |
|   | CHECKED  | DATE       | DRAWING NO                          | JB96*08005             |
|   | DRAWN    | DATE       | COMPUTER NO                         | RD0800501              |
|   | 杨大宽      | 2008/09/25 |                                     |                        |
| UNIT  | SCALE    | SIZE       | NAME                                | FPC 0.5 CONNECTOR H2.0 |
| MM  | 8:1      | A3         | ZIF FOR SMT (Positive Upright TYPE) | REV A                  |
| SER   | AREA     | REVISIONS  | CHK                                 | DATE                   |