
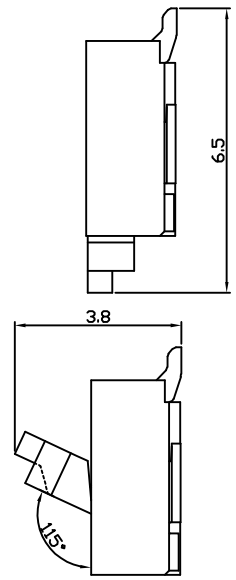

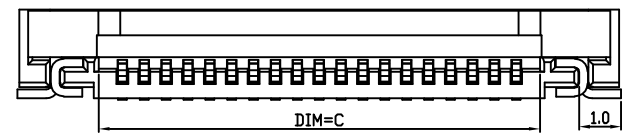
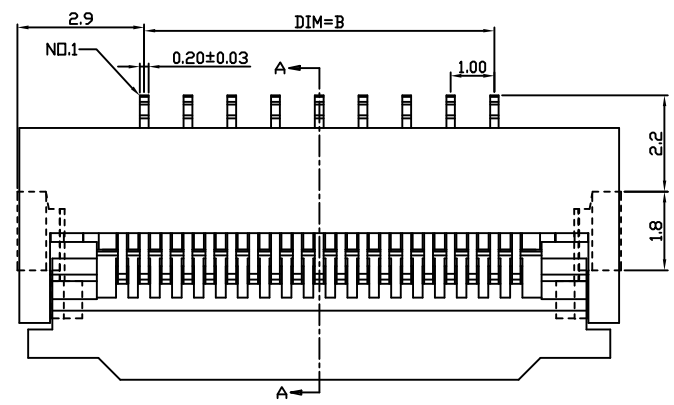
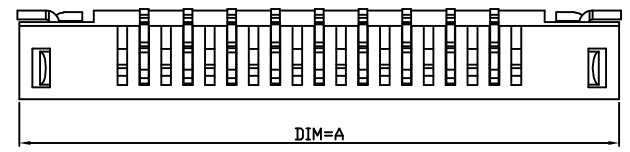


PIN数	DIM=A	DIM=B	DIM=C
4P	8.7	3.00	5.10
5P	9.7	4.00	6.10
6P	10.7	5.00	7.10
7P	11.7	6.00	8.10
8P	12.7	7.00	9.10
9P	13.7	8.00	10.10
10P	14.7	9.00	11.10
11P	15.7	10.00	12.10
12P	16.7	11.00	13.10
13P	17.7	12.00	14.10
14P	18.7	13.00	15.10
15P	19.7	14.00	16.10
16P	20.7	15.00	17.10
17P	21.7	16.00	18.10
18P	22.7	17.00	19.10
19P	23.7	18.00	20.10
20P	24.7	19.00	21.10
21P	25.7	20.00	22.10
22P	26.7	21.00	23.10
23P	27.7	22.00	24.10
24P	28.7	23.00	25.10
25P	29.7	24.00	26.10
26P	30.7	25.00	27.10
27P	31.7	26.00	28.10
28P	32.7	27.00	29.10
29P	33.7	28.00	30.10
30P	34.7	29.00	31.10
31P	35.7	30.00	32.10
32P	36.7	31.00	33.10
33P	37.7	32.00	34.10
34P	38.7	33.00	35.10
35P	39.7	34.00	36.10
36P	40.7	35.00	37.10
37P	41.7	36.00	38.10
38P	42.7	37.00	39.10
39P	43.7	38.00	40.10
40P	44.7	39.00	41.10

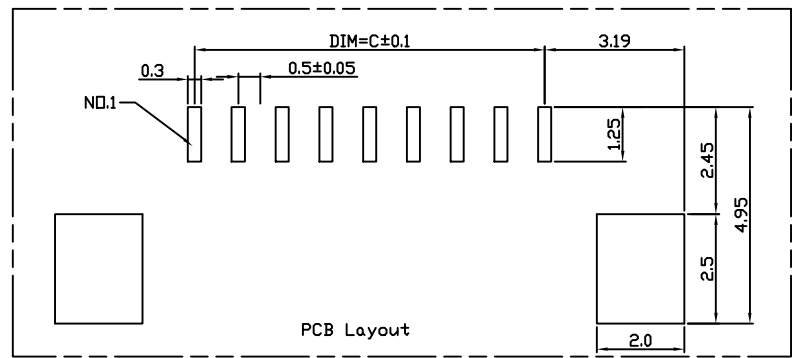


**Electrical Characteristics:**  
 Current rating: 0.4A AC/DC  
 Voltage rating: 50V AC/DC  
 Temperature range: -25°C ~ +85°C  
 Withstand Voltage: 200V AC/Minute  
 Contact Resistance: ≤ 20mΩ  
 Insulation resistance: ≥ 500mΩ  
 Relative Humidity: 93%+40°C

**Material Description:**  
 Terminal: Phosphor Bronze Tin-Leadplated  
 Fitting Nail: Brass Tin-plated  
 Housing: Thermoplastic(UL94V-0)  
 Slider: Thermoplastic(UL94V-0)

**NOTES:**  
 1.PLASTIC BURRS 0.1mm MAX  
 2.PART NO. SPECIFICATION:

11-52-XX01-12  
 NO. OF CONTACT  
 PACK:  
 1:Tape  
 2:Reel  
 Plating code:  
 1: Tin-Leadplated  
 2: Gold flash  
 3: Gold 3μ"  
 4: Gold 5μ"

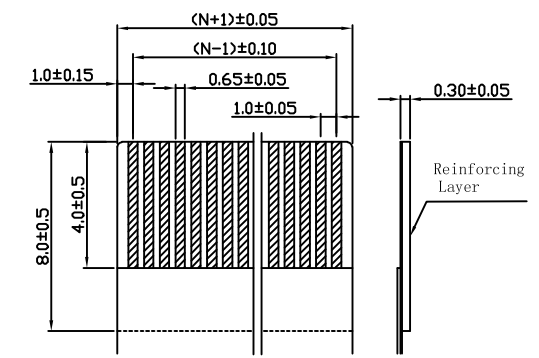

RECOMMENDED FFC/FPC DIM.

**东莞市宽拓电子科技有限公司**  
**Dongguan Kuantuo Electronics Co.,Ltd**

SER	AREA	REVISIONS	CHK	DATE	UNIT	MM

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 X.X ±0.15  
 X.XX ±0.05  
 X.XXX  
 ANG. ±0° 30'

APPROVED	DATE	PART NO	11-52-XX01-12
CHECKED	DATE	DRAWING NO	JB96*08005
DRAWN	DATE	COMPUTER NO	RD0800501
杨大宽	2008/09/25		
NUMBER	SCALE	SIZE	NAME
1/1	8:1	A3	FFC 1.0 CONNECTOR H2.0 ZIF FOR SMT(FLIP BOTTOM CONT)
			REV
			A