NOTES:
1.MATERIAL:
HOUSING:THERMOPLASTIC(UL94V-0)
ACTUATOR:THERMOPLASTIC(UL94V-0)
TERMINAL:PHOSPHOR BRONZE GOLD PLATED
FITTING NAIL:BRASS MATTE TIN PLATED
2.PART NO. SPECIFICATION: 11-32-XX01-X2
32:BOTTOM CONTACT NO. OF CONTACT CODE
PACK
Plating code:
1: Tin-Leadplated
2: Gold flash
3: Gold 3μ"
4: Gold 5μ"

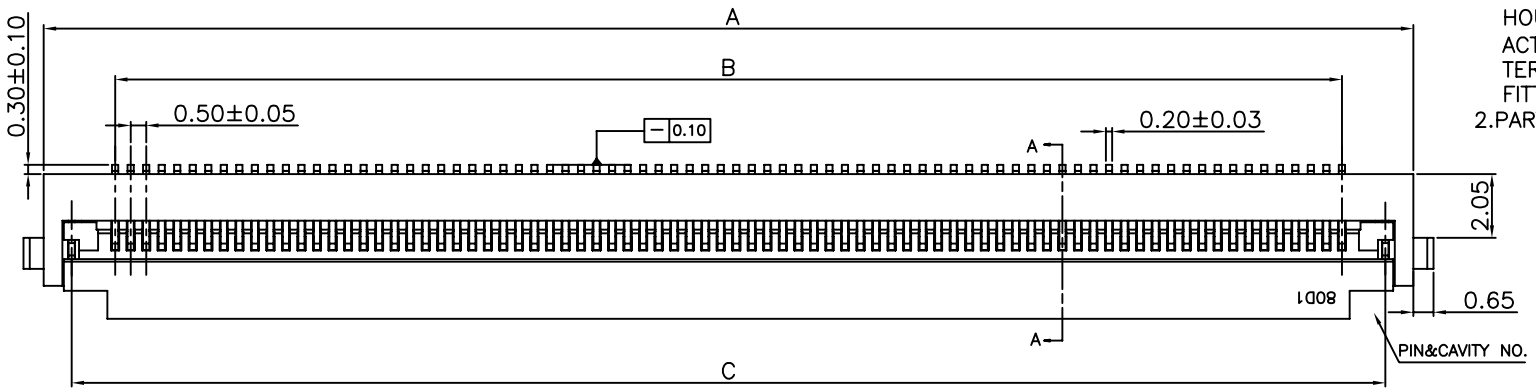


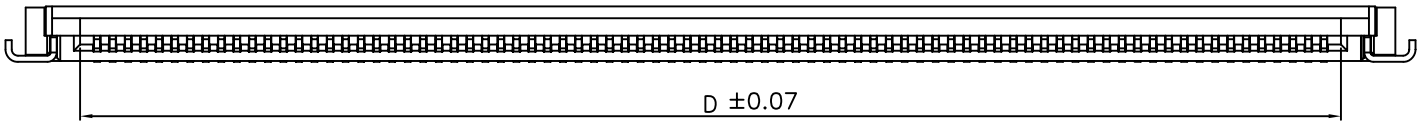





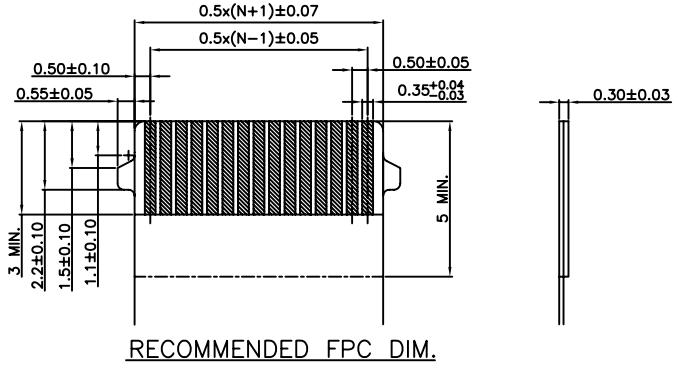


RECOMMENDED FPC DIM.

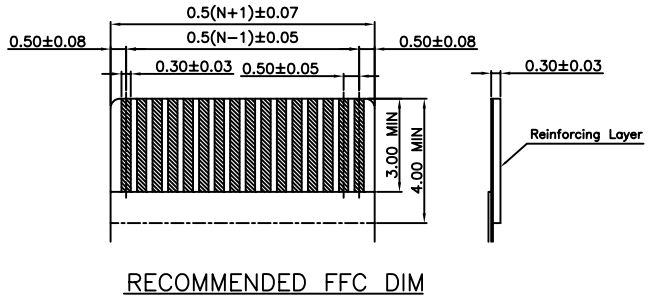


RECOMMENDED FFC DIM

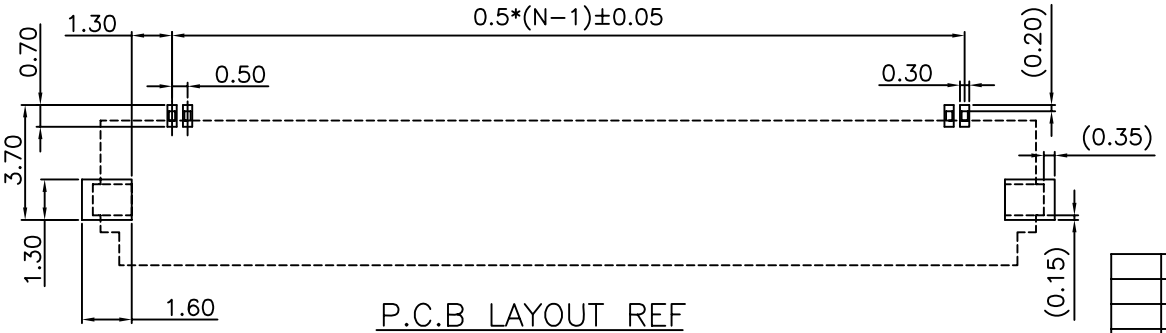


P.C.B LAYOUT REF

| Dimension | | | | |
|---|---|---|---|---|
| PIN数 | A | B | C | D |
| 60 | 34.10 | 29.50 | 32.30 | 30.60 |
| 68 | 38.10 | 33.50 | 36.30 | 34.60 |
| 80 | 44.10 | 39.50 | 42.30 | 40.60 |

东莞市宽拓电子科技有限公司
Dongguan Kuantuo Electronics Co.,Ltd

| SER | AREA | REVISIONS | CHK | DATE |
|---|---|---|---|---|
| 1 | | | | |

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
X.X ±0.15
X.XX ±0.05
X.XXX
ANG. ±0°30'
UNIT MM

| | | | |
|---|---|---|---|
| APPROVED | DATE | PART NO | 11-32-XX01-X2 |
| CHECKED | DATE | DRAWTING NO | JB96*11001 |
| DRAWN 杨大宽 | DATE 2011/07/25 | COMPUTER NO | RD1100101 |
| NUMBER | SCALE 8:1 | SIZE A3 | NAME FPC 0.5 CONNECTOR H1.8 ZIF FOR SMT(BOTTOM CONT) |
| | | | REV A |