

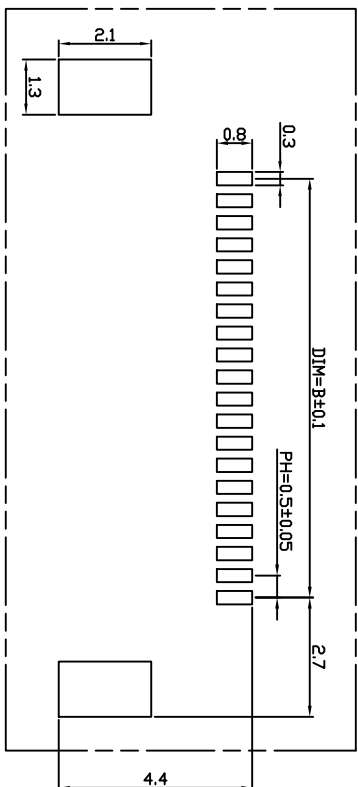
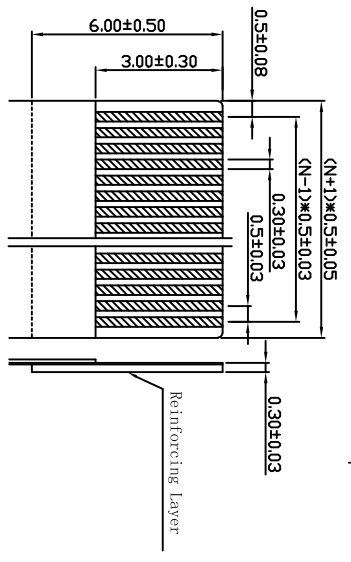




PIN数	DIM=A	DIM=B	DIM=C
4P	6.1	1.50	2.60
5P	6.6	2.00	3.10
6P	7.1	2.50	3.60
7P	7.6	3.00	4.10
8P	8.1	3.50	4.60
9P	8.6	4.00	5.10
10P	9.1	4.50	5.60
11P	9.6	5.00	6.10
12P	10.1	5.50	6.60
13P	10.6	6.00	7.10
14P	11.1	6.50	7.60
15P	11.6	7.00	8.10
16P	12.1	7.50	8.60
17P	12.6	8.00	9.10
18P	13.1	8.50	9.60
19P	13.6	9.00	10.10
20P	14.1	9.50	10.60
21P	14.6	10.00	11.10
22P	15.1	10.50	11.60
23P	15.6	11.00	12.10
24P	16.1	11.50	12.60
25P	16.6	12.00	13.10
26P	17.1	12.50	13.60
27P	17.6	13.00	14.10
28P	18.1	13.50	14.60
29P	18.6	14.00	15.10
30P	19.1	14.50	15.60
31P	19.6	15.00	16.10
32P	20.1	15.50	16.60
33P	20.6	16.00	17.10
34P	21.1	16.50	17.60
35P	21.6	17.00	18.10
36P	22.1	17.50	18.60
37P	22.6	18.00	19.10
38P	23.1	18.50	19.60
39P	23.6	19.00	20.10
40P	24.1	19.50	20.60
41P	24.6	20.00	21.10
42P	25.1	20.50	21.60
43P	25.6	21.00	22.10
44P	26.1	21.50	22.60
45P	26.6	22.00	23.10
46P	27.1	22.50	23.60
47P	27.6	23.00	24.10
48P	28.1	23.50	24.60
49P	28.6	24.00	25.10
50P	29.1	24.50	25.60
51P	29.6	25.00	26.10
52P	30.1	25.50	26.60
53P	30.6	26.00	27.10
54P	31.1	26.50	27.60
55P	31.6	27.00	28.10
56P	32.1	27.50	28.60
57P	32.6	28.00	29.10
58P	33.1	28.50	29.60
59P	33.6	29.00	30.10
60P	34.1	29.50	30.60

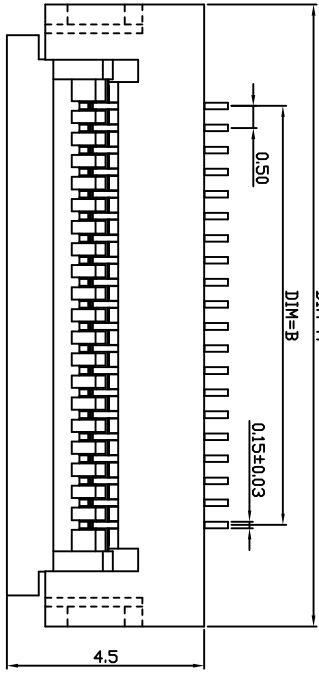

PCB Layout



RECOMMENDED FPC/FPC DIM.



Electrical Characteristics:
 Current rating: 0.4A AC/DC
 Voltage rating: 50V AC/DC
 Temperature range: -25°C ~ +85°C
 Withstand Voltage: 200V AC/Minute
 Contact Resistance: ≤ 20mΩ
 Insulation resistance: ≥ 500mΩ
 Relative Humidity: 93%+40°C

Material Description:
 Terminal: Phosphor Bronze Tin-Leadplated
 Fitting Nail: Brass Tin-plated
 Housing: Thermoplastic(UL94V-0)
 Slider: Thermoplastic(UL94V-0)

NOTES:
 1. PLASTIC BURRS 0.1mm MAX
 2. PART NO. SPECIFICATION:

11-25-XX01-12

PACK:
 1: Tape
 2: Reel
 Plating code:
 1: Tin-Leadplated
 2: Gold flash
 3: Gold 3μ"
 4: Gold 5μ"

SER	AREA	REVISIONS	CHK	DATE	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	APPROVED	PART NO
					X.X ±0.15		11-25-XX01-12
					X.XX ±0.05	CHECKED	DATE
					X.XXX	DRAWN	DATE
					ANG.	杨大荣	2008/09/25
					±0° 30'	SCALE	A3
						NUMBER	81
						SIZE	A3
						NAME	FPC 0.5mm CONNECTOR H1.5
						ZIP FOR SMT/FP BOTTOM CONT	REV
							A

东莞市宽拓电子科技有限公司
 Dongguan Kuantuo Electronics Co., Ltd