
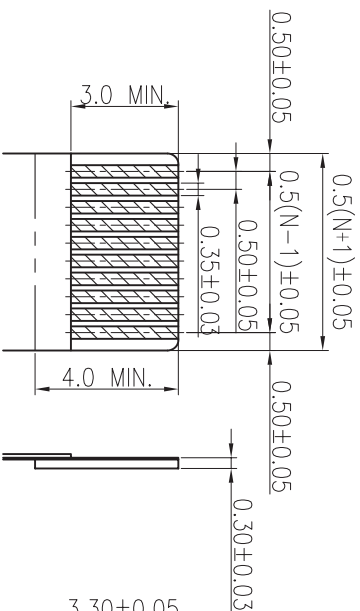



Electrical Characteristics:
 Current rating: 0.4A AC/DC
 Voltage rating: 50V AC/DC
 Temperature range: -25°C~+85°C
 Withstand Voltage: 200V AC/Minute
 Contact Resistance: $\leq 20m\Omega$
 Insulation resistance: $\geq 500m\Omega$
 Relative Humidity: 93%+40°C

Material Description:
 Terminal: Phosphor Bronze
 Fitting Nail: Brass Tin-plated
 Housing: Thermoplastic(UL94V-0)
 Slider: Thermoplastic(UL94V-0)

PART NO. SPECIFICATION: 11-13-XX01-X2
 NO. OF CONTACT CODE: 13/DUAL CONTACT
 PACK
 Plating code:
 1: Tin-Leadplated
 2: Gold Flash
 3: Gold 9u"
 4: Gold 5u"

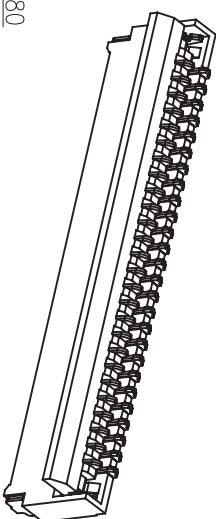

APPLICABLE F.P.C DIMENSION(REF.)
 T=0.30±0.03mm

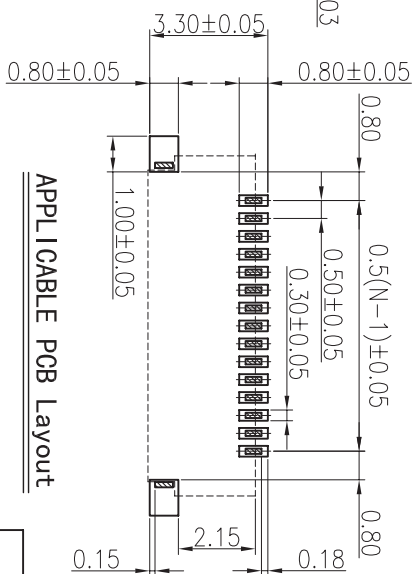

APPLICABLE PCB Layout

No. of Contacts	DM A	DM B	DM C	DM D
4	4.00	1.50	2.55	3.37
5	4.50	2.00	3.05	3.87
6	5.00	2.50	3.55	4.37
7	5.50	3.00	4.05	4.87
8	6.00	3.50	4.55	5.37
9	6.50	4.00	5.05	5.87
10	7.00	4.50	5.55	6.37
11	7.50	5.00	6.05	6.87
12	8.00	5.50	6.55	7.37
13	8.50	6.00	7.05	7.87
14	9.00	6.50	7.55	8.37
15	9.50	7.00	8.05	8.87
16	10.00	7.50	8.55	9.37
17	10.50	8.00	9.05	9.87
18	11.00	8.50	9.55	10.37
19	11.50	9.00	10.05	10.87
20	12.00	9.50	10.55	11.37
21	12.50	10.00	11.05	11.87
22	13.00	10.50	11.55	12.37
23	13.50	11.00	12.05	12.87
24	14.00	11.50	12.55	13.37
25	14.50	12.00	13.05	13.87
26	15.00	12.50	13.55	14.37
27	15.50	13.00	14.05	14.87
28	16.00	13.50	14.55	15.37
29	16.50	14.00	15.05	15.87
30	17.00	14.50	15.55	16.37
31	17.50	15.00	16.05	16.87
32	18.00	15.50	16.55	17.37
33	18.50	16.00	17.05	17.87
34	19.00	16.50	17.55	18.37
35	19.50	17.00	18.05	18.87
36	20.00	17.50	18.55	19.37
37	20.50	18.00	19.05	19.87
38	21.00	18.50	19.55	20.37
39	21.50	19.00	20.05	20.87
40	22.00	19.50	20.55	21.37

东莞市宽拓电子科技有限公司
 Dongguan Kuantuo Electronics Co., Ltd

APPROVED DATE: 11-13-XX01-X2
 PART NO. 11-13-XX01-X2
 DRAWING NO. JB96*11001

CHECKED DATE: 2011/07/25
 DRAWN DATE: 2011/07/25
 DRAWING NO. RDI1100101

SCALE(SIZE) NAME PFC 05 CONNECTOR H101 REV A
 NUMBER 81 A3 ZIF FPC SMT(DUAL, CMD)

SER AREA	REVISIONS	CHK	DATE

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:
 XX ±0.15
 XXX ±0.10
 ANG. ±0°30'

UNIT: MM