
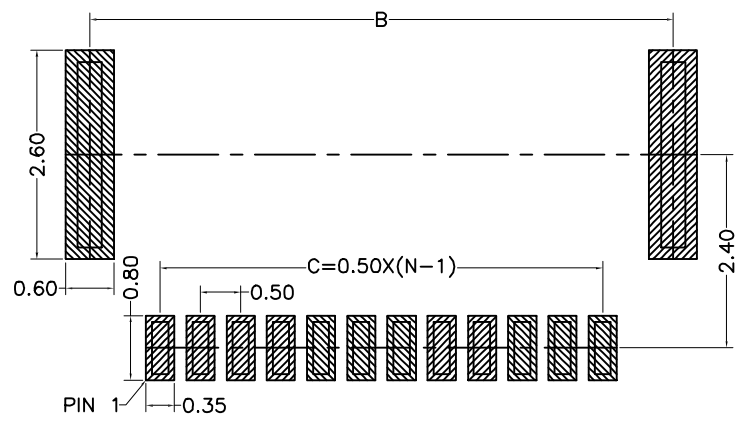


| PORT NO | Dimension | | |
|---------|-----------|-------|-------|
| | A | B | D |
| 04P | 4.10 | 3.25 | 2.60 |
| 05P | 4.60 | 3.75 | 3.10 |
| 06P | 5.10 | 4.25 | 3.60 |
| 07P | 5.60 | 4.75 | 4.10 |
| 08P | 6.10 | 5.25 | 4.60 |
| 09P | 6.60 | 5.75 | 5.10 |
| 10P | 7.10 | 6.25 | 5.60 |
| 11P | 7.60 | 6.75 | 6.10 |
| 12P | 8.10 | 7.25 | 6.60 |
| 13P | 8.60 | 7.75 | 7.10 |
| 14P | 9.10 | 8.25 | 7.60 |
| 15P | 9.60 | 8.75 | 8.10 |
| 16P | 10.10 | 9.25 | 8.60 |
| 17P | 10.60 | 9.75 | 9.10 |
| 18P | 11.10 | 10.25 | 9.60 |
| 19P | 11.60 | 10.75 | 10.10 |
| 20P | 12.10 | 11.25 | 10.60 |
| 21P | 12.60 | 11.75 | 11.10 |
| 22P | 13.10 | 12.25 | 11.60 |
| 23P | 13.60 | 12.75 | 12.10 |
| 24P | 14.10 | 13.25 | 12.60 |
| 25P | 14.60 | 13.75 | 13.10 |
| 26P | 15.10 | 14.25 | 13.60 |
| 27P | 15.60 | 14.75 | 14.10 |
| 28P | 16.10 | 15.25 | 14.60 |
| 29P | 16.60 | 15.75 | 15.10 |
| 30P | 17.10 | 16.25 | 15.60 |
| 31P | 17.60 | 16.75 | 16.10 |
| 32P | 18.10 | 17.25 | 16.60 |
| 33P | 18.60 | 17.75 | 17.10 |
| 34P | 19.10 | 18.25 | 17.60 |
| 35P | 19.60 | 18.75 | 18.10 |
| 36P | 20.10 | 19.25 | 18.60 |
| 37P | 20.60 | 19.75 | 19.10 |
| 38P | 21.10 | 20.25 | 19.60 |
| 39P | 21.60 | 20.75 | 20.10 |
| 40P | 22.10 | 21.25 | 20.60 |
| 41P | 22.60 | 21.75 | 21.10 |
| 42P | 23.10 | 22.25 | 21.60 |
| 43P | 23.60 | 22.75 | 22.10 |
| 44P | 24.10 | 23.25 | 22.60 |
| 45P | 24.60 | 23.75 | 23.10 |

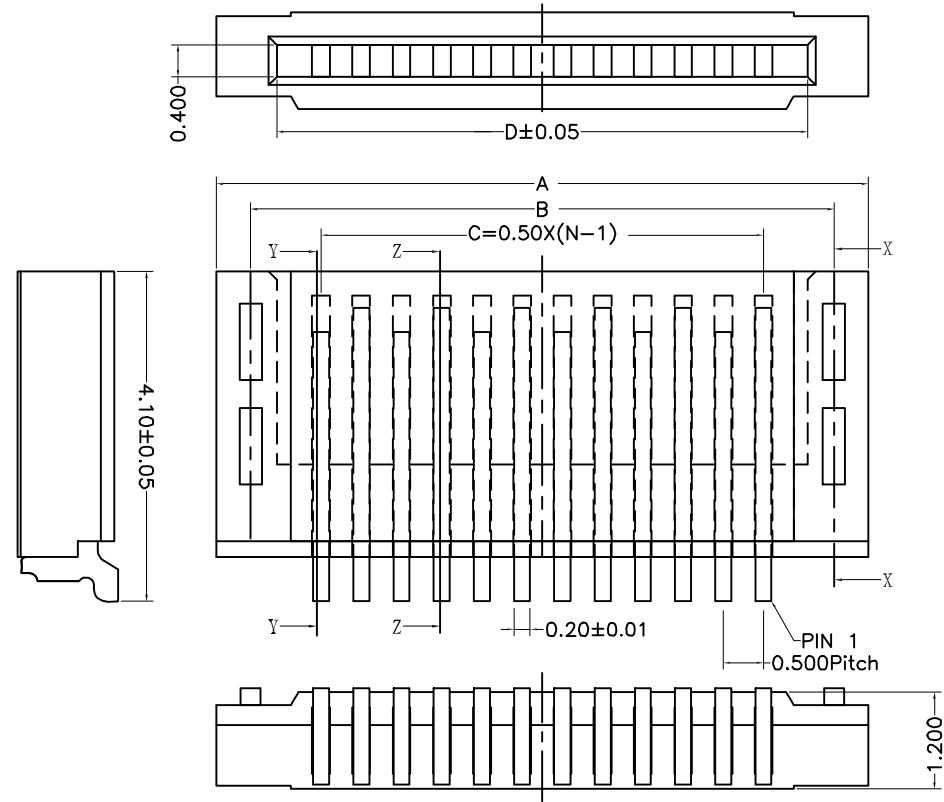


RECOMMENDED P.C.B LAYOUT

Electrical Characteristics:
 Current rating: 0.4A AC/DC
 Voltage rating: 50V AC/DC
 Temperature range: -25°C ~ +85°C
 Withstand Voltage: 200V AC/Minute
 Contact Resistance: ≤ 20mΩ
 Insulation resistance: ≥ 500mΩ
 Relative Humidity: 93%+40°C

Material Description:
 Terminal: Phosphor Bronze Tin-Leadplated
 Fitting Nail: Brass Tin-plated
 Housing: Thermoplastic(UL94V-0)
 Slider: Thermoplastic(UL94V-0)

NOTES:
 1.PLASTIC BURRS 0.1mm MAX
 2.PART NO. SPECIFICATION:

11-61-XX01-12
 NO. OF CONTACT →
 PACK:
 1:Tape
 2:Reel
 Plating code:
 1: Tin-Leadplated
 2: Gold flash
 3: Gold 3μ"
 4: Gold 5μ"

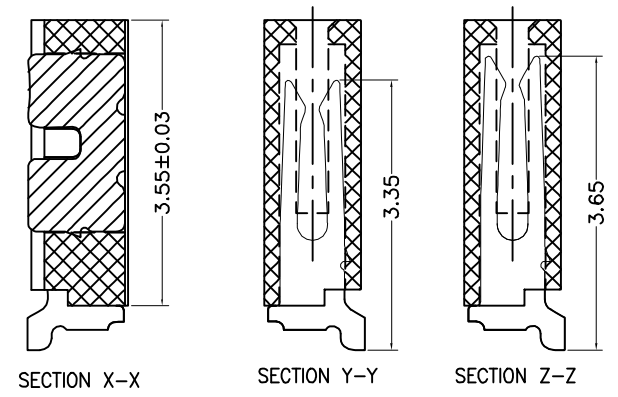

| SER | AREA | REVISIONS | CHK | DATE |
|-----|------|-----------|-----|------|
| | | | | |
| | | | | |
| | | | | |
| | | | | |

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X.X ±0.15
 X.XX ±0.05
 X.XXX
 ANG. ±0° 30'

| | | | |
|----------|------------|---|--|
| | | 东莞市宽拓电子科技有限公司 Dongguan Kuantuo Electronics Co.,Ltd | |
| APPROVED | DATE | PART NO | 11-61-XX01-12 |
| CHECKED | DATE | DRAWING NO | JB96*08005 |
| DRAWN | DATE | COMPUTER NO | RD0800501 |
| 杨大宽 | 2008/09/25 | | |
| NUMBER | SCALE | SIZE | NAME |
| 1/1 | 8:1 | A3 | FPC 0.5 CONNECTOR(H1.2 NON-ZIF FOR SMT(DUAL CONT)) |
| | | | REV |
| | | | A |