

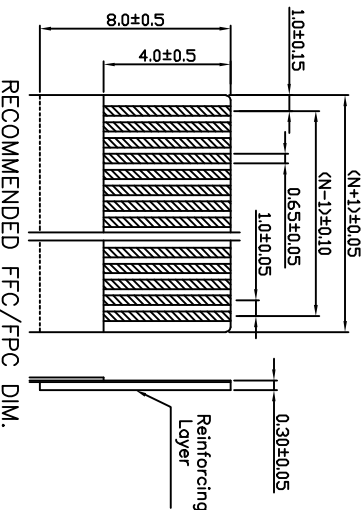
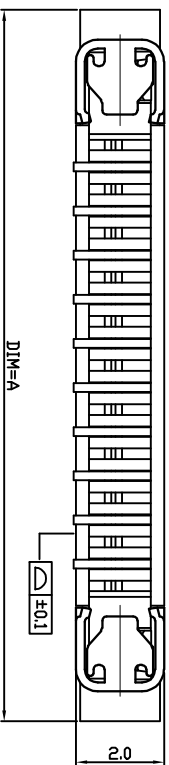



**Electrical Characteristics:**  
 Current rating: 0.4A AC/DC  
 Voltage rating: 50V AC/DC  
 Temperature range: -25°C~+85°C  
 Withstand Voltage: 200V AC/Minute  
 Contact Resistance:  $\leq 20m\Omega$   
 Insulation resistance:  $\geq 500m\Omega$   
 Relative Humidity: 93%~+40°C


**Material Description:**  
 Terminal: Phosphor Bronze Tin-Leadplated  
 Fitting Nail: Brass Tin-plated  
 Housing: Thermoplastic(U194V-0)  
 Slider: Thermoplastic(U194V-0)



RECOMMENDED FFC/FPC DIM.

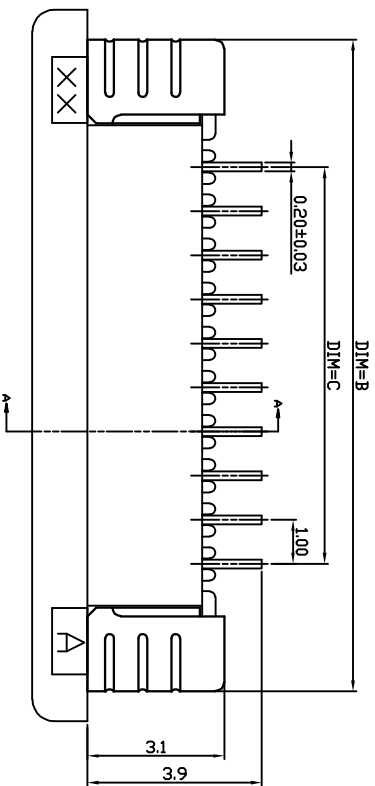

SECTION A-A  
上接触

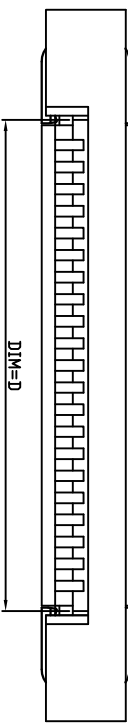

**NOTES:**  
 1. PLASTIC BURRS 0.1mm MAX  
 2. PART NO. SPECIFICATION: 11-35-XX01-12  
 35-UPPER CONTACT  
 NO. OF CONTACT CODE  
 PLATING

PIN数	DIM=A	DIM=B	DIM=C	DIM=D	DIM=E
30P	36.1	34.8	29.00	31.10	
29P	35.1	33.8	28.00	30.10	
28P	34.1	32.8	27.00	29.10	
27P	33.1	31.8	26.00	28.10	
26P	32.1	30.8	25.00	27.10	
25P	31.1	29.8	24.00	26.10	
24P	30.1	28.8	23.00	25.10	5.8
23P	29.1	27.8	22.00	24.10	
22P	28.1	26.8	21.00	23.10	
21P	27.1	25.8	20.00	22.10	
20P	26.1	24.8	19.00	21.10	
19P	25.1	23.8	18.00	20.10	
18P	24.1	22.8	17.00	19.10	
17P	23.1	21.8	16.00	18.10	
16P	22.1	20.8	15.00	17.10	
15P	21.1	19.8	14.00	16.10	
14P	20.1	18.8	13.00	15.10	
13P	19.1	17.8	12.00	14.10	
12P	18.1	16.8	11.00	13.10	
11P	17.1	15.8	10.00	12.10	5.2
10P	16.1	14.8	9.00	11.10	
9P	15.1	13.8	8.00	10.10	
8P	14.1	12.8	7.00	9.10	
7P	13.1	11.8	6.00	8.10	
6P	12.1	10.8	5.00	7.10	
5P	11.1	9.8	4.00	6.10	
4P	10.1	8.8	3.00	5.10	

SER AREA	REVISIONS	CHK	DATE

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	APPROVED	CHECKED	DATE	PART NO.
X.X				11-35-XX01-12
X.XX				
X.XXX				
ANG.				
MM				

**东莞市宽拓电子科技有限公司**  
 Dongguan Kuantuo Electronics Co., Ltd

DRAWN	DATE	COMPUTER NO.	SCALE	SIZE	NAME	FPC 10 CONNECTOR	REV
杨大雄	2008/09/25	RD0800301	8:1	A3	ZIF FOR SMT(UPPER CONTACT)	A	