

Ride on type orchard diesel engine air blast sprayer

Engine: Changchai diesel engine 12HP.

Tank capacity: 250-320L

Operation way: pull and ride on type.

The whole machine is shorter and narrower, and has high traffic ability.



Main pictures 3WZ-250A



Main pictures 3WZ-250B




Main pictures 3WZ-250C



Model	3WZ-250 Self propelled type
Engine	12HP Air cooled four stroke diesel engine
Mini Ground clearance	20 cm Increased adoption
Sprayer pump	60 Three cylinder plunger pump
Sprayer pump flow	15—20L/min Adjustable flow
Work pressure	2—4Mpa
Tank capacity	250L Stainless steel material
Fan diameter	570mm ventilation duct and aluminium alloy fan blade
Sprayer nozzle quantity	10 pcs Stainless steel nozzle and copper switch
Sprayer nozzle type	180 degree sector nozzle body can switch and adjust the spray angle individually
Work height	Max 5m
Work width	Max 15 m
Net weight	300KG
Tyre size	16/6.50—8
Drive type	Rear wheel drive
Steering mode	Double drive differential bend
Gear box	1 -0-2-Reverse gear
Overall size	2.3-2.8 X0.9 X0.9 m
Drive speed	1 forward 2000m/h
	2 forward 3000m/h

Machine configuration list

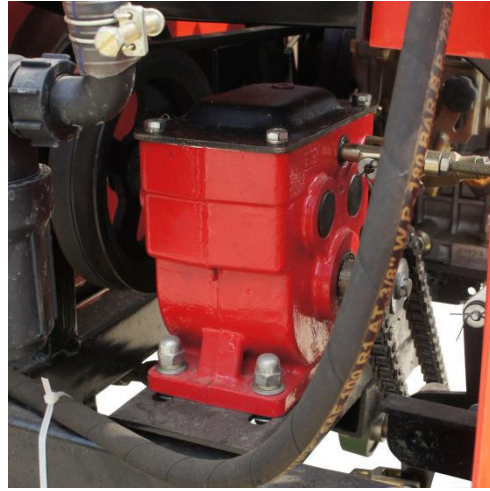

Gear box: 2F+1R

Engine and sprayer pump system




Changchai diesel engine 12HP



Three-cylinder plunger pump

Chassis drive system

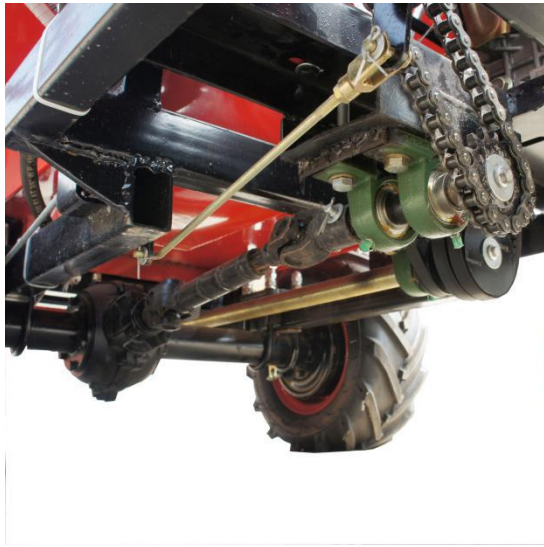

Axle from Tricycle and Design custom gearbox, Maintenance is simple and quality is stable.

Air distribution system



special design fan, built-in reinforced secondary booster system duct, high degree of atomization, with a separate fan clutch, easy to control.

Stainless steel tank



Tank Material and volum: stainless steel and 250-320l

Tyres



Customized low-pressure ultra-wide tire, especially suitable for orchard wetland work.