


**Product Description:**

- Rated temperature: 60°C
- Rated voltage: 300/500volts
- Reference standard: DIN VDE 0282
- Bare or tinned stranded copper conductor
- EPR insulation
- RoHS compliant rubber jacket type CPE/CR

**Applications:**

- for use of high voltage equipment and as general electric cable, suitable for indoor, home appliances, mobile devices, refrigeration equipment, engineering machinery, agricultural machinery, and aquatic series electric equipment, with good weather resistance and oil resistance.

**Construction:**

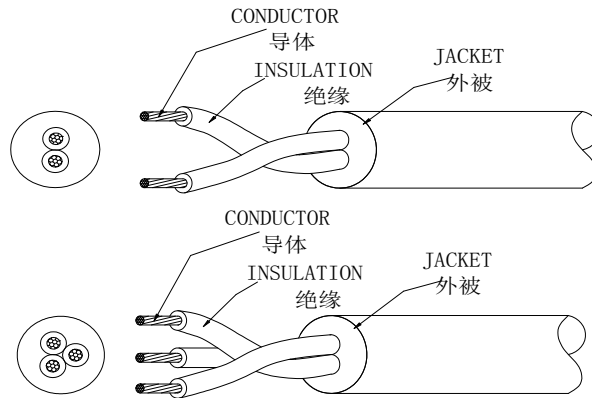

H05RN-F							
Cores	Conductor		Insulation		Jacket		Rated Current
	Section Area (mm <sup>2</sup> )	Construction (NO/mm)	Thickness (mm)	Diameter (mm)	Thickness (mm)	Diameter (mm)	
2C	0.75	24/0.20	0.60	2.35	0.80	6.30	10A
	1.00	32/0.20	0.60	2.55	0.90	6.90	10A
3C	0.75	24/0.20	0.60	2.35	0.90	7.00	10A
	1.00	32/0.20	0.60	2.55	0.90	7.30	10A