

Product Description:

Rated temperature: 90°C or 105°C

Rated voltage: 300volts


Reference standard: UL62

Bare or tinned stranded copper conductor

Insulated material with EP

CPE or CSM Jacket

Construction:

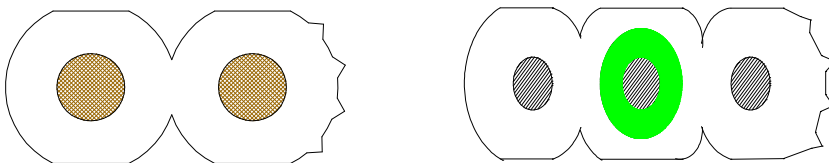

HPN								
Cores	Conductor			Insulation		Jacket		Rated Current
	Gauge (AWG)	Section Area (mm ²)	Construction (NO/mm)	Thickness (mm)	Diameter (mm)	Thickness (mm)	Diameter (mm)	
2C	18	0.82	41/0.16	/	/	1.14	3.5×7.0	10A
	16	1.31	26/0.254	/	/		3.8×7.6	13A
	14	2.08	41/0.254	/	/	2.03	4.8×9.6	15A
3C	18	0.82	41/0.16	0.38	2.15	1.14	3.7×9.5	10A
	16	1.31	26/0.254	0.38	2.40		4.0×10.3	13A
	14	2.08	41/0.254	0.38	2.80	2.03	5.0×12.2	15A