


Product Description:

- Rated temperature: 70°C
- Rated voltage: 300/500volts
- Reference standard: DIN VDE 0281
- Bare, stranded copper conductor
- Colour-coded eco-friendly PVC insulation
- RoHS compliant PVC jacket

Applications:

- Power supply wire, suitable for indoor small electrical instrument

Construction:

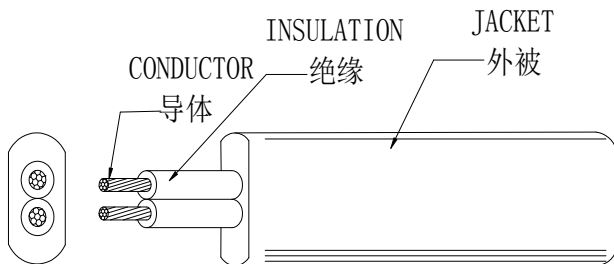

H05VVH2-F							
Cores	Conductor		Insulation		Jacket		Rated Current
	Section Area (mm ²)	Construction (NO/mm)	Thickness (mm)	Diameter (mm)	Thickness (mm)	Diameter (mm)	
2C	0.75	24/0.20	0.60	2.35	0.80	4.0*6.3	6A
	1.00	32/0.20	0.60	2.50	0.80	4.1*6.6	10A