


Product Description:

Rated temperature: 70°C
 Rated voltage: 300volts
 Reference standard: DIN VDE 0281
 Bare, stranded copper conductor
 Colour-coded eco-friendly PVC insulation
 RoHS compliant PVC jacket.

Applications:

Power supply wire, suitable for indoor small electrical instrument.

Construction:

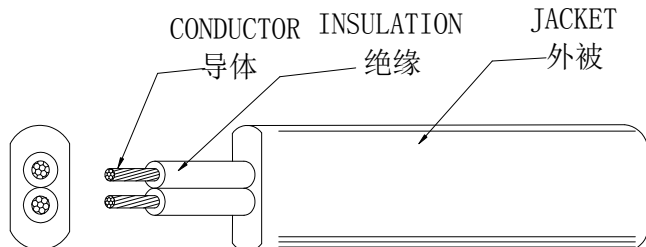

H03VVH2-F							
Cores	Conductor		Insulation		Jacket		Rated Current
	Section Area (mm ²)	Construction (NO/mm)	Thickness (mm)	Diameter (mm)	Thickness (mm)	Diameter (mm)	
2C	0.50	16/0.20	0.50	1.95	0.60	3.5*5.6	3A
	0.75	24/0.20	0.50	2.15	0.60	3.6*5.7	6A