


Product Description:

- Rated temperature: 70°C
- Rated voltage: 300volts
- Reference standard: DIN VDE 0281
- Bare, stranded copper conductor
- Colour-coded eco-friendly PVC insulation
- RoHS compliant PVC jacket.

Applications:

Power supply wire, suitable for indoor small electrical instrument.

Construction:

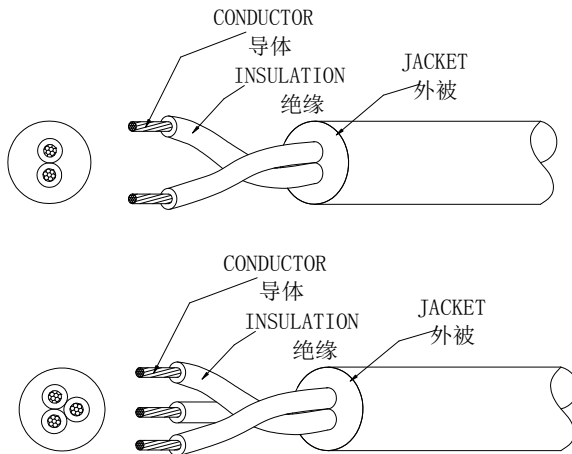

H03VV-F							
Cores	Conductor		Insulation		Jacket		Rated Current
	Section Area (mm ²)	Construction (NO/mm)	Thickness (mm)	Diameter (mm)	Thickness (mm)	Diameter (mm)	
2C	0.50	16/0.20	0.50	1.95	0.60	5.30	3A
	0.75	24/0.20	0.50	2.15	0.60	5.60	6A
3C	0.50	16/0.20	0.50	1.95	0.60	5.40	3A
	0.75	24/0.20	0.50	2.15	0.60	6.00	6A