


SPECIFICATION

UL Model:	UL20549	Document Number	Made date	Rev:
Specification:	26AWGx3C	WCH17042710	2017/04/27	1.0V
Cross Section				
Technical Parameters				
Conductor	Specification (AWG)	26		
	Material	Annealed Bare Stranded Copper		
	Configuration (mm)	AS18/0.10±0.007		
Insulation	Average Thickness (mm)	0.24		
	Minimum Thickness (mm)	0.20		
	Over Diameter (mm)	1.00±0.10		
	Material	SR-PVC (RoHS)		
	Colour	Brown, Blue, Black		
Assembly	FILLER	--		
	Cotton Papper (mm)	--		
Jacket	Average Thickness (mm)	0.37		
	Minimum Thickness (mm)	0.30		
	Over Diameter (mm)	2.90±0.10		
	Material	TPU (RoHS), FT1/FT2		
	Colour	Gray (RAL7001)		
Electrical Capability	Rated Temperature (°C)	80		
	Rated Voltage (V)	300		
	Conductor Resistance (Ω/KM 20°C)	140.00		
	Insulation Resistance (MΩ/KM 20°C)	10		
Remark	Minimum Bending Radius: Jacket Over Diameter x 12; Oil Resistant, Hydrolysis Resistant			

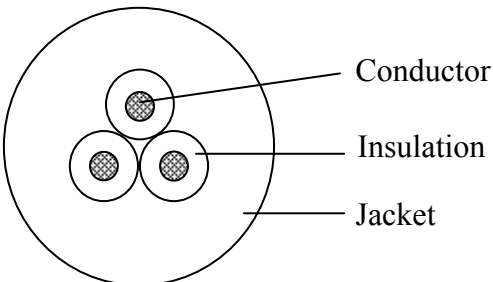