


SPECIFICATION

UL Model:	UL2464	Document Number	Made Date	Rev:
Specification:	28AWGx3C	WCH16041906	2016/04/19	1.0V
Cross Section				
Technical Parameters				
Conductor	Specification (AWG)	28		
	Material	Tinned Stranded Copper		
	Configuration (mm)	TS7/0.127±0.007		
Insulation	Average Thickness (mm)	0.25		
	Minimum Thickness (mm)	0.20		
	Over Diameter (mm)	0.90±0.08		
	Material	SR-PVC (RoHS)		
	Colour	Black, White, Red		
Assembly	FILLER	--		
	Screened Shield (mm)	One Side Aluminum (AL Facing Inside)		
Jacket	Average Thickness (mm)	0.85		
	Minimum Thickness (mm)	0.68		
	Over Diameter (mm)	3.70±0.20		
	Material	PVC (RoHS)		
	Colour	Black		
Electrical Capability	Rated Temperature (°C)	80		
	Rated Voltage (V)	300		
	Conductor Resistance (Ω/KM 20°C)	239		
	Insulation Resistance (MΩ/KM 20°C)	10		
Marking	As per standard of UL2464			

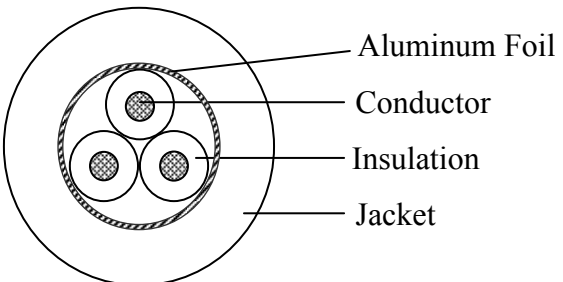