
Wire Part



Add 6x core aramid fiber to extend lifetime

Change to use higher durability TPE jacket

Plug Part

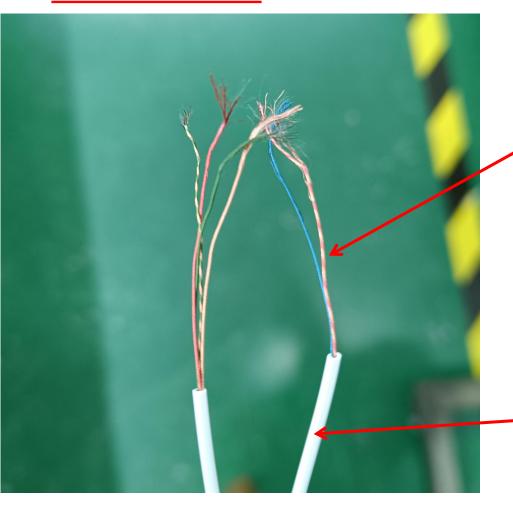

Laser SUS304 metal solder to protect DAC chipset




UV glue to fix the solder point




Injection to enforce the plug & pull & bend

Driver Part



Precise glue on each driver




Tie a knot at the end of wire to enforce pull durability

Microphone Part

Add insulating sheet below the microphone PCB board, reducing the leakage of electricity





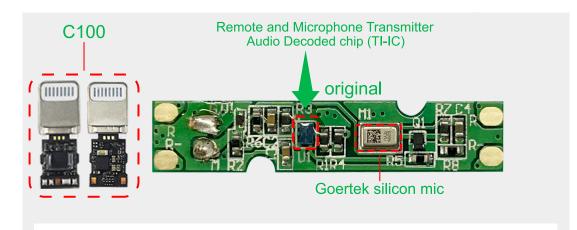

- ► MFi lightning connector-C100
- ► High-quality sound without loss, control siri intelligently
- Peripheral protection circuit
- ► Support Karaoke function