

PAN & BOX BRAKE



W1.0x610Z
W1.5x915Z
W1.5x1220Z



W1.0x610A
W1.0x305A
W1.0x915A



W2.0x2040A/W2.0x2540A
W2.0x3050A/W2.5x1220A
W2.5x2040A/W2.5x2540A



W1.5x1050



W1.2x1010
W1.2x1300

PAN & BOX BRAKE



W1.5x1260A



W2.5x1220B
W2.0x2040B
W2.0x2540B, W2



W1.5x1220

Pipe Notcher / Rotary Machine



PTN12U



RA1 RA2 RA3



RM12



MF256A

Model	MF127
Motor speed	3000r/min
Sandwheel size	125x32mm
Sawblade dia.	Φ120-750mm
Max.grinding drill bit dia.	13mm
Motor power	150W
N.W./G.W.	20/21kg
Packing size	400x290x320mm



MF127

Model	MF256A/MF2510
Max.sharpening length	650mm/1000mm
sharpening blade angle	34°-42°
Emery wheel speed	2850r/min
Emery wheel dimension	BW125X45X32
Motor power	1.1KW
Packing size	1260X700X1350mm
N.W./G.W.	248/350kg



SH-7128D

Model	SH-7128D
Diameter of edge mill	90-630mm
Max.diamter lf mill cutter×thickness	φ200×180mm
Max.length lf straight cutter	300mm
Carving cutter	φ13mm
Sand wheel specifications	φ125×180mm
Spindle speed	2860r/min
Motor power	370W/380V
Water pump power	40W/380V
Over dimensions	650×800×1580mm

SH-7128E



Model	SH-7128E
Diameter of edge mill	80-500mm
Sand wheel specifications	φ125-180
Spindle speed	2860r/min
Max.length lf straight cutter	300mm
Max.diamter lf mill cutter×thickness	200×180mm
Carving cutter	13mm
Hight of spindle lift	200mm
Motor power	370W/380V
Water pump power	40W/380V
Packing size	940x840x1390mm
G.W./N.W.	267kg/205kgs



SHCX3100

Model	SHCX3100
Max workpiece length	3100mm
Workpiece forming heigh	12-80mm
Min workpiece width	200mm
Max motor power	6kw
Max heating temperature	210degree
Min entering air pressure	0.7Mpa
Machine overall size	4200x1000x1760mm
Net weight	1400kg



SHCXS3100

Model	SHCXS3100
Max. working length	3250mm
Max. working thickneser	76mm
Work table high	900mm
Max. temperature	210℃
Max. hoting power	6kw
Air press	0.6MPa
Overall Size	3600x1200x1750mm
Weight	1100kg



SHHA3100

Model	SHHA3100
Max. length of workpiece	3100mm
Workpiece forming height	12~80mm
Min. length of workpiece	200mm
Max. power of equipment	6kw
Max. heating temperature	210℃
Work air pressure	0.7MPa
Outer dimension	4020×750×1760mm
Net weight	1400kg

Option:45 degree cutting



SHG-B4028



SHG-B4035



SHG-B4240



SHG-B4250



SHG-B4260

Model	SHG-B4028	SHG-B4035	SHG-B4240	SHG-B4250	SHG-B4260
Max.Cutting size Round	280x280mm	350x350mm	400x400mm	500 x 500mm	600 x 600mm
Max.Cutting size Square	280x300mm	350x400mm	400x500mm		
Saw band size(mm)	0.9x27x3505	1.3x41x4115	1.3x41x4700	1.3x41x5750	1.3x41x6300
Saw band speed(mpm)	25/49/75	27/45/70	31/50/90MPM	25, 45, 65MPM	25, 45, 65MPM
Main motor	3KW	3KW	4KW	4KW	4KW
Hydraulic pump motor	0.55KW	0.75KW	1.5KW	1.5KW	1.5KW
Cold pump motor	40W	40W	75W	95w	75W
Hydraulic pressure oil	28L	28L	50L	40L	50L
Cooling fluid	25L	25L	50L	60L	50L
Hydraulic specification	3MPa 10L/min	3MPa 10L/min	6.3MPa 10L/min	6.3MPa 10L/min	6.3MPa 10L/min
N.W./G.W.	750/900kg	1050/1200kg	1650/1800kg	2000/2150kg	1650/1800kg
Packing Size(mm)	2000x1150x1650	2200x1200x1700	2500x1400x1900	3000x1400x2000	2500x1400x2000
Machine Electrical	6V 27V 36V	6V 27V 36V	6V 27V 36V	6V 27V 36V	6V 27V 36V



HP-10S-50S
Auto and Manual as a unit



100T,150T,200T
With Free Move Cylinder



10T,20T,30T,40T,50T



30T



30T

With Free Move Cylinder



50T,63T



HPB-150T/200T
Double Cylinder Bending



100T,150T,200T,300T,
400T,500T,630T



HPB-100T/150T/200T/300T
Hydraulic Bending Machine



10T,20T,30T,40T,50T
Europe Model

We can make 30T-300T

CNC Control →



SH05-HPCNC-100

Model	SH05-HPCNC-100
Capacity(KN)	1000
Pressure(MPA)	30
Piston travel/Table Travel(mm)	250+405
Table size(mm)	460X980
Dimension(mm)	182X73X225
Hydraulic Station(cm)	73X63X96
N.W./G.W.(kg)	1220/1420



ZX40 with manual




ZX50C with manual



ZX50CA
with Auto feeding motor

Model	ZX40	ZX50C	ZX50CA
Max.drilling dia.(mm)	40	50	50
Max.horizontal milling dia.(mm)	100	100	100
Max.vertical milling dia.(mm)	16	20	25
Max. bore dia.(mm)	120	120	120
Max.tapping dia.(mm)	M16	M16	M16
Distance of spindle to table(mm)	120-550	38-430	600-650
Spindle speeds range (r.p.m)	168-3160	270-2400(8)	40-1400
Spindle travel(mm)	120	110	120
Table size(mm)	800x240	900x240	1000x260
Table travel(mm)	400x250	500x250	450x500
Motor power(kW)	1.5	1.5/2.2	1.5/2.2
G.W.(kg)	460	570	600/700

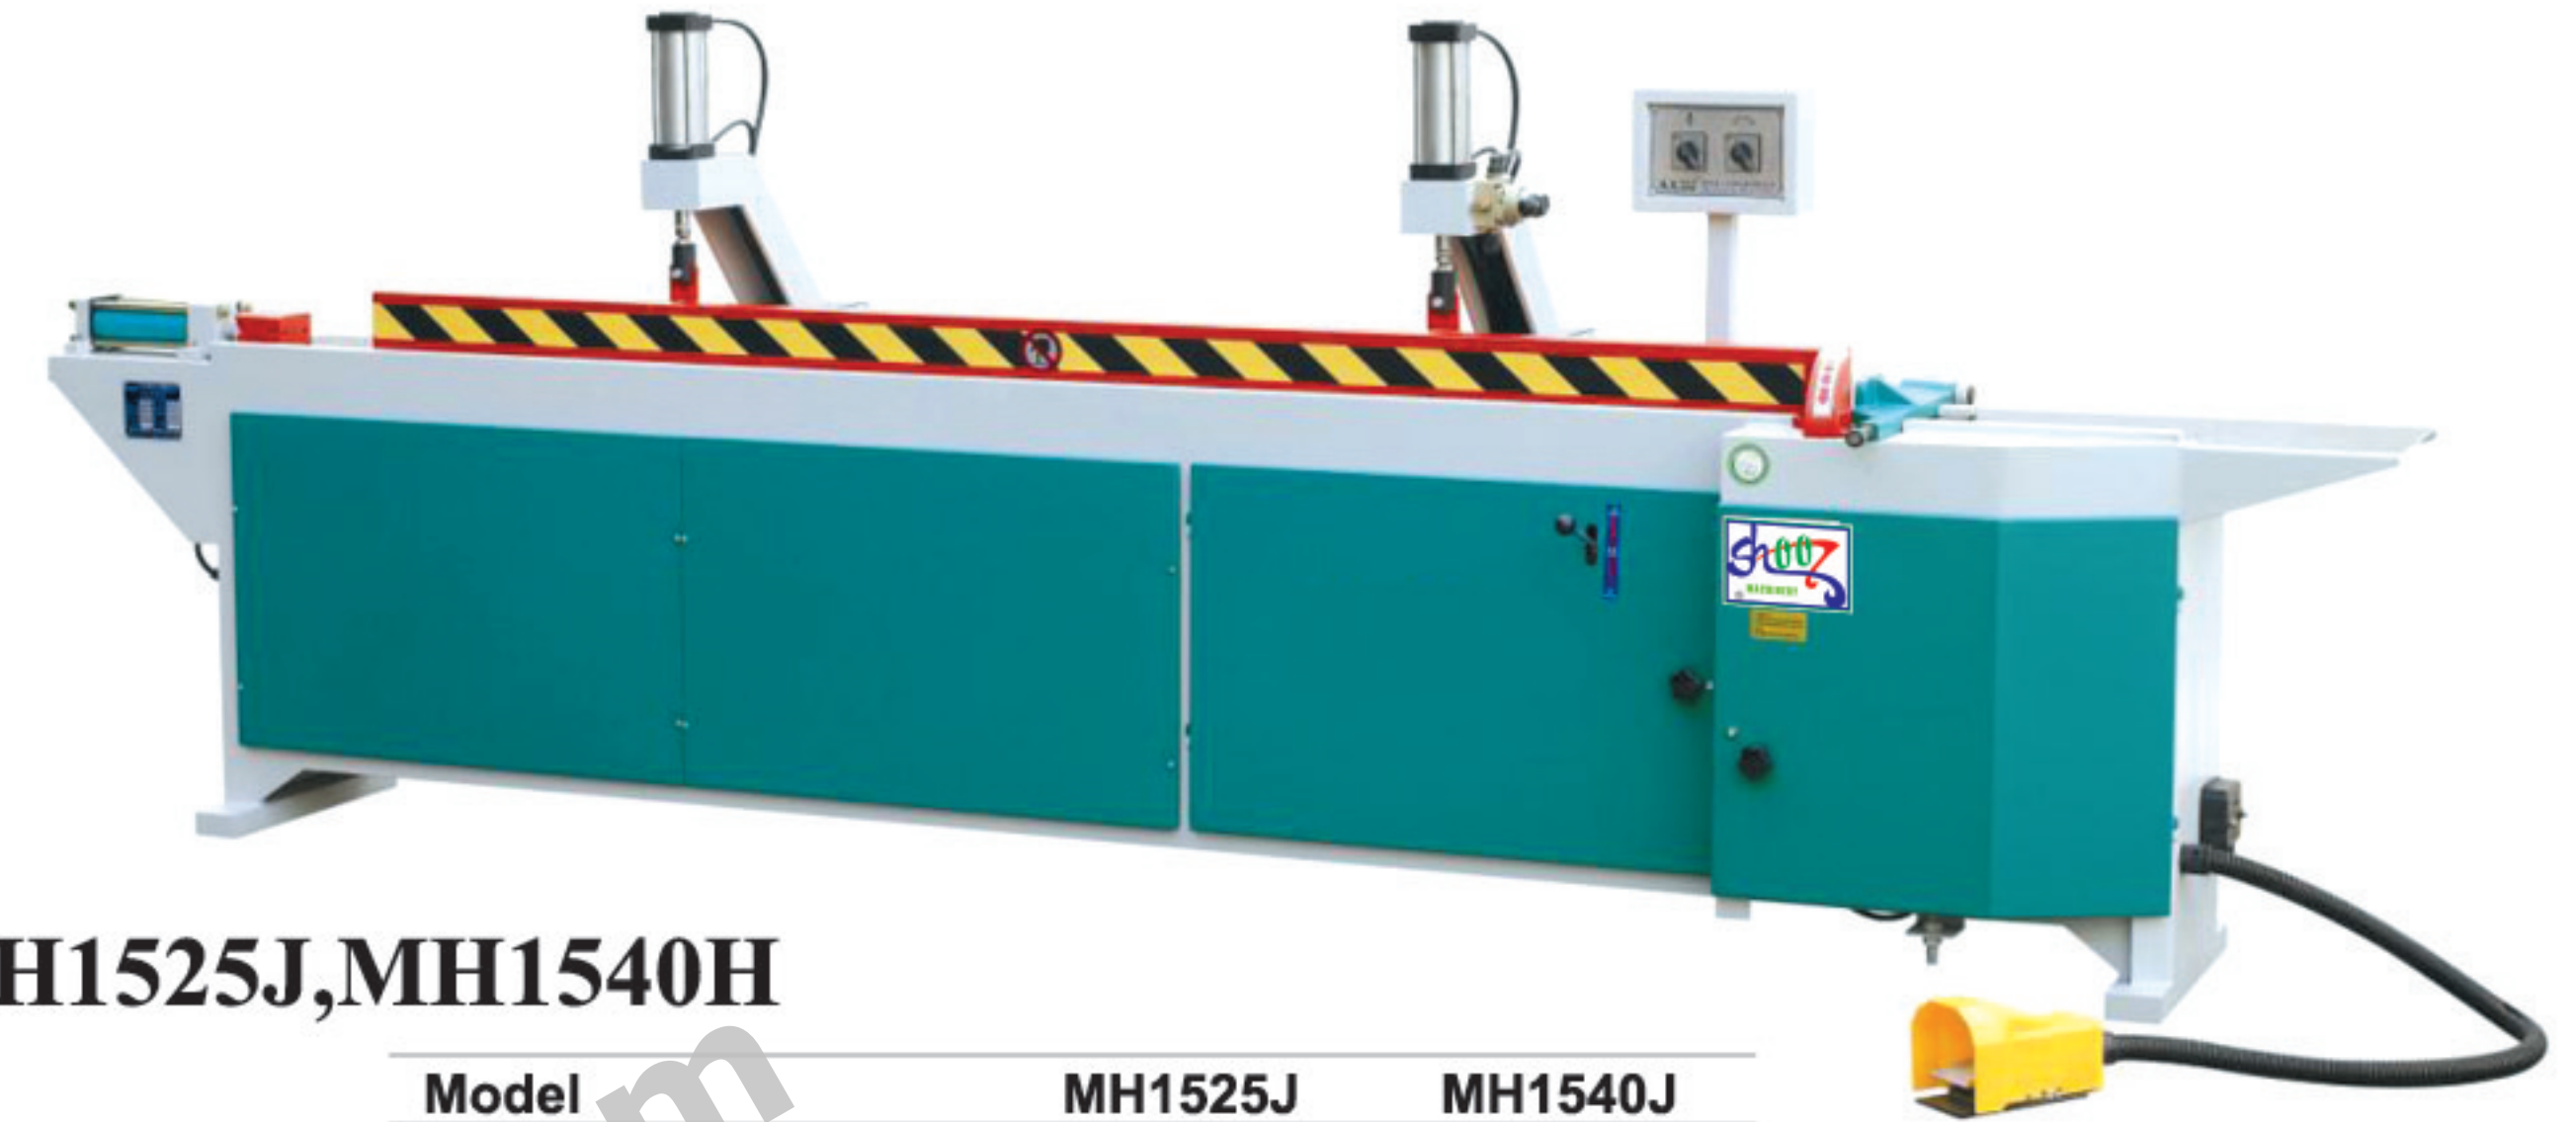

MH1525J, MH1540H

Model	MH1525J	MH1540J
Max.working length	2500mm	4000mm
Max.working width	120mm	120mm
Max.working thickness	70mm	70mm
Max.working pressure	8000kg	8000kg
Max.blade dia	305mm	305mm
Install power	2.2kwx2	2.2kwx2



MX3510

Model	MX3510
LxWxH	130x153x130cm
Working table size	640x500mm
Max.working width	330mm
Max.working thickness	100mm
Jointing cutter dia	160mm
Spindle dia	305mm
Net weight	570kg
Jointing tenoner length	12mm
Max.blade dia	35(50)mm
Spindle speed	5500r/min
Blade motor power	2.2kw
Spindle motor power	7.5kw



MXB3510

Model	MXB3510
LxWxH	130x153x160cm
Working table size	640x500mm
Max.working width	330mm
Max.working thickness	100mm
Jointing cutter dia	160mm
Blade dia	305mm
Spindle dia	35(55)mm
Spindle speed	5500r/min
Install power	10.45kw

3 IN 1-Combine of Shear,Brake ,Roll Machine



3-IN-1 305 x1/610 x1/760 x1
1016 x 1 /1067 x 1/1320 x 1



3-IN-1 1067x1.5/1320x1.5

Arbor Press



AP-1-2/AP-1/AP-2



AP-3/AP-5

Bar & Section Shear



PBS-7




PBS-8

Electric Shear



SH11D-3x1300

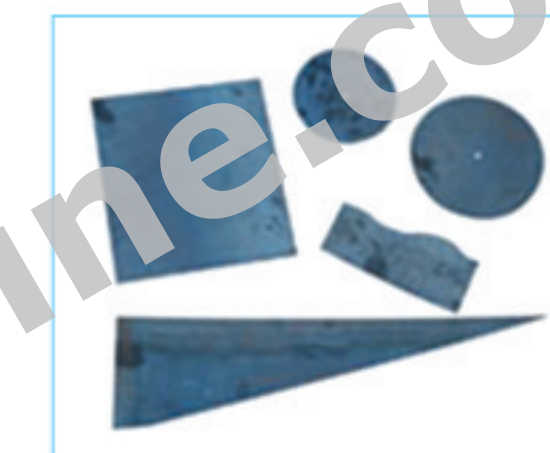

SHM-3

Folding Machine



PBB1020-2
PBB1500-1.5
PBB2060-1.5



PBB1020-2A
PBB1270-2A
PBB1500-1.5A



PBB1020-3SH
PBB1270-3SH

Foot Shear



Q01-1.0X1000
Q01-1.5X1320



Q01-1.5X1500

Guillotine Shear / Hand Notcher / Hand Puncher



HS-500
HS-800
HS-1000



HN-4



HPSH-20

Manual Shear



HGS-8



HS-5



HS-12



MS-20/MS-24
MS-28/MS-32