

目录INDEX

公司介绍Company Information	01/02
公司证书Company Certificate	03
实景展示 Factory View	04
目 录Catalogue	05/06

高光效系列 High Light Efficiency Series

2835高光效High Efficiency	07
3030高光效High Efficiency	08
5054高光效High Efficiency	09
5730高光效High Efficiency	10
7070高光效High Efficiency	11

教育灯/全光谱/健康照明系列 Education Lighting/Full Spectrum /Health Lighting Series

PCT2835	12
PCT3030	13

户外照明系列 Outdoor Lighting Series

EMC3030	14/15
PCT5054	16
EMC5054	17

智能家居系列 Smart Home Lighting Series

2835高压点粉红光High Voltage Phosphor Red	18
2835高压点粉绿光High Voltage Phosphor Green	19

LP International Industries Co., Ltd
info@LPinte.com
<https://www.LPinte.com>

2835高压蓝光High Voltage Blue	20
EMC3030RGB	21

RGB系列 RGB Series

5050RGB	22
3030RGB	23
5053RGB	24
5054RGB	25
3535RGB	26
2835RGB	27
5054RGBW	28
5054RGBWW	29

双色温系列 Bi-color Series

2835双色温Bi-color	30
3030双色温Bi-color	31
5054双色温Bi-color	32

植物灯照明系列 Plant Growth Lighting Series

2835植物红 Plant Red	33
5054植物红 Plant Red	34
3030对等植物灯 M1 Plant Light	35
3030球头植物灯 Plant Light with Lens	36
5054球头植物灯 Plant Light with Lens	37
3535模顶植物红 Plant Red with Lens	38

高光效系列 High Light Efficiency Series



产品参数 Parameters

2835高光效High Light Efficiency

电流 Current	电压 Voltage	色温 Color Temperature	显指 CRI/RA	亮度 Brightness	光效 Light Efficiency
60mA	2.7-2.9V	5000K	80	36-38LM	220-230LM/W
60mA	2.7-2.9V	5000K	70	38-40LM	240-250LM/W

应用范围 Applications

广泛应用于太阳能路灯, 无人机照明, 泛光灯, 格栅灯, 面板灯筒灯等照明领域。
Widely used in solar street Light, UAV lighting, flood light, grille light, panel light, down light and other lighting fields.



高光效系列 High Light Efficiency Series



产品参数 Parameters

3030高光效High Light Efficiency

电流 Current	电压 Voltage	色温 Color Temperature	显指 CRI/RA	亮度 Brightness	光效 Light Efficiency
60mA	2.7-2.9V	5000K	80	36-38LM	220-230LM/W
60mA	2.7-2.9V	5000K	70	38-40LM	240-250LM/W

应用范围 Applications

广泛应用于太阳能路灯, 无人机照明, 泛光灯, 格栅灯, 面板灯筒灯等照明领域。
Widely used in solar street light, UAV lighting, flood light, grille light, panel light, down light and other lighting fields.



高光效系列 High Light Efficiency Series



产品参数 Parameters

5054高光效High Light Efficiency

电流 Current	电压 Voltage	色温 Color Temperature	显指 CRI/RA	亮度 Brightness	光效 Light Efficiency
60mA	2.6-2.8V	5000K	80	36-38LM	220-230LM/W
60mA	2.6-2.8V	5000K	70	38-40LM	240-250LM/W

应用范围 Applications

广泛应用于太阳能路灯, 无人机照明, 泛光灯, 格栅灯, 面板灯筒灯等照明领域。
Widely used in solar street Light, UAV lighting, flood light, grille light, panel light, down light and other lighting fields.



高光效系列 High Light Efficiency Series



产品参数 Parameters

5730高光效High Light Efficiency

电流 Current	电压 Voltage	色温 Color Temperature	显指 CRI/RA	亮度 Brightness	光效 Light Efficiency
150mA	2.8-3.0V	5000K	80	80-85LM	180-190LM/W
150mA	2.8-3.0V	5000K	70	85-90LM	190-200LM/W

应用范围 Applications

广泛应用于太阳能路灯, 无人机照明, 泛光灯, 格栅灯, 面板灯筒灯等照明领域。
Widely used in solar street Light, UAV lighting, flood light, grille light, panel light, down light and other lighting fields.



高光效系列 High Light Efficiency Series



产品参数 Parameters

7070高光效High Light Efficiency

电流 Current	电压 Voltage	色温 Color Temperature	显指 CRI/RA	亮度 Brightness	光效 Light Efficiency
350mA	9.0-9.3V	4000K	80	550-570LM	190-200LM/W

应用范围 Applications

广泛应用于太阳能路灯, 无人机照明, 泛光灯, 格栅灯, 面板灯筒灯等照明领域。
Widely used in solar street Light, UAV lighting, flood light, grille light, panel light, down light and other lighting fields.



教育灯 / 全光谱/健康照明系列 Education Lighting / Full Spectrum/Health Lighting Series



产品参数 Parameters

PCT2835

电流 Current	电压 Voltage	色温 Color Temperature	显指 CRI/RA	亮度 Brightness	光效 Light Efficiency
150mA	2.8-3.0V	4000K	95	65-70LM	140-150LM/W
150mA	2.8-3.0V	4000K	95	75-80LM	170-180LM/W

应用范围 Applications

广泛应用于教育照明, 健康照明, 植物照明, 商业照明, 汽车照明等领域。
Widely used in education lighting, health lighting, plant lighting, commercial lighting, automotive lighting and other fields.



教育灯 /全光谱/健康照明系列 Education Lighting /Full Spectrum/Health Lighting Series



产品参数 Parameters

PCT3030					
电流 Current	电压 Voltage	色温 Color Temperature	显指 CRI/RA	亮度 Brightness	光效 Light Efficiency
300mA	3.0-3.2V	4000K	95	120-130LM	130-140LM/W
300mA	3.0-3.2V	4000K	95	150-160LM	160-170LM/W

应用范围 Applications

广泛应用于教育照明, 健康照明, 植物照明, 商业照明, 汽车照明等领域。
Widely used in education lighting, health lighting, plant lighting, commercial lighting, automotive lighting and other fields.



户外照明系列 Outdoor Lighting Series



产品参数 Parameters


EMC3030					
电流 Current	电压 Voltage	色温 Color Temperature	显指 CRI/RA	亮度 Brightness	光效 Light Efficiency
300mA	3.0-3.2V	6500K	70	160-170LM	180-190LM/W
300mA	3.0-3.2V	6500K	80	155-165LM	170-180LM/W

应用范围 Applications

广泛应用于路灯, 投光灯, 隧道灯, 工矿灯、洗墙灯以及楼宇亮化等户外照明领域。
Widely used in street light, flood light, tunnel light, high bay light, wall washerlight, building light and other outdoor lighting fields.



户外照明系列 Outdoor Lighting Series

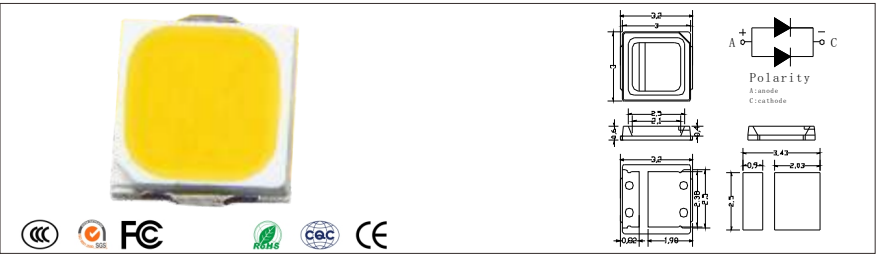

产品参数 Parameters

EMC3030					
电流 Current	电压 Voltage	色温 Color Temperature	显指 CRI/RA	亮度 Brightness	光效 Light Efficiency
300mA	3.0-3.2V	5000K	70	160-170LM	175-185LM/W
300mA	3.0-3.2V	5000K	80	170-180LM	180-190LM/W

应用范围 Applications

广泛应用于路灯,投光灯,隧道灯,工矿灯、洗墙灯以及楼宇亮化等户外照明领域。
Widely used in street light, flood light, tunnel light, high bay light, wall washerlight ,building light and other outdoor lighting fields.



户外照明系列 Outdoor Lighting Series



产品参数 Parameters


PCT5054					
电流 Current	电压 Voltage	色温 Color Temperature	显指 CRI/RA	亮度 Brightness	光效 Light Efficiency
150mA	2.7-2.9V	6000K	70	85-90LM	200-210LM/W

应用范围 Applications

广泛应用于路灯,投光灯,隧道灯,工矿灯、洗墙灯以及楼宇亮化等户外照明领域。
Widely used in street light, flood light, tunnel light, high bay light, wall washerlight ,building light and other outdoor lighting fields.



户外照明系列 Outdoor Lighting Series

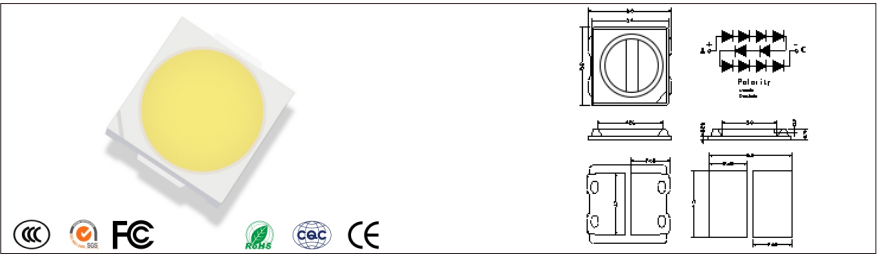


产品参数 Parameters


EMC5054					
电流 Current	电压 Voltage	色温 Color Temperature	显指 CRI/RA	亮度 Brightness	光效 Light Efficiency
30mA	30-32V	5000K	70	190-200LM	205-215LM/W
60mA	32-34V	5000K	70	340-350LM	200-210LM/W
60mA	24-26V	5000K	70	280-290LM	210-220LM/W

应用范围 Applications

广泛应用于路灯, 投光灯, 隧道灯, 工矿灯、洗墙灯以及楼宇亮化等户外照明领域。
Widely used in street light, flood light, tunnel light, high bay light, wall washerlight ,building light and other outdoor lighting fields.

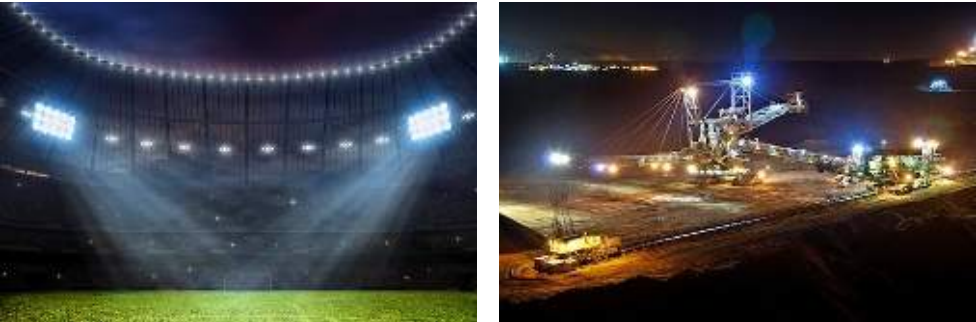

智能家居系列 Smart Home Series

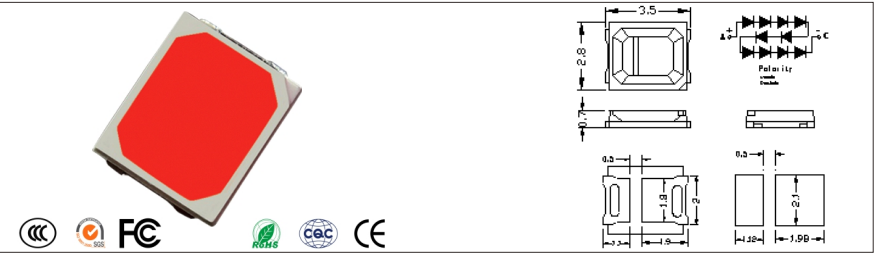

产品参数 Parameters

2835高压点粉红光High Voltage Phosphor Red					
电流 Current	电压 Voltage	亮度 Brightness	光效 Light Efficiency	波长 Wave Length	峰值波长 Peak Wave Length
15mA	72-74V	35-40LM	35-40LM/W	615-620nm	635-640nm
20mA	54-56V	30-35LM	30-35LM/W	615-620nm	635-640nm
30mA	36-38V	30-35LM	30-35LM/W	615-620nm	635-640nm
55mA	18-20V	30-35LM	30-35LM/W	615-620nm	635-640nm

应用范围 Applications

广泛应用于蓝牙灯,WIFI灯, 智能蜡烛灯, 智能球泡灯等智能家居照明领域。
Widely used in bluetooth, WIFI Light, smart candle light, smart bulb and other smart home lighting fields.



智能家居系列 Smart Home Series




产品参数 Parameters

2835高压点粉绿光High Voltage Green


电流 Current	电压 Voltage	亮度 Brightness	光效 Light Efficiency	波长 Wave Length	峰值波长 Peak Wave Length
15mA	72-74V	120-130LM	120-130LM/W	520-525nm	510-515nm
20mA	54-56V	120-130LM	120-130LM/W	520-525nm	510-515nm
30mA	36-38V	110-120LM	100-120LM/W	520-525nm	510-515nm
55mA	18-20V	110-120LM	100-120LM/W	520-525nm	510-515nm

应用范围 Applications

广泛应用于蓝牙灯, WIFI灯, 智能蜡烛灯, 智能球泡灯等智能家居照明领域。
Widely used in blue tooth, WIFI Light, smart candle light, smart bulb and other smart home lighting fields.

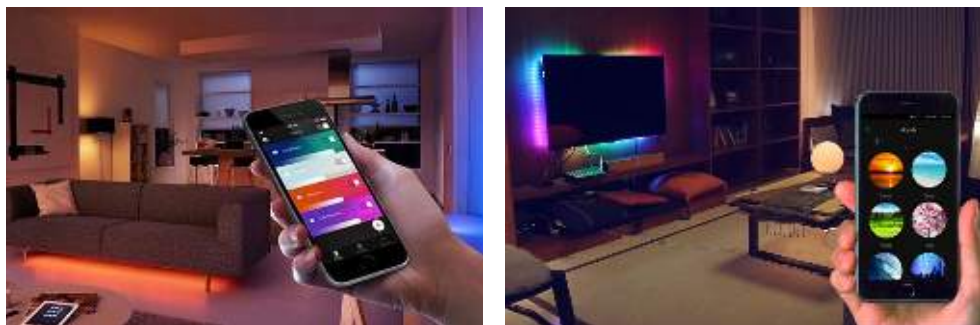

智能家居系列 Smart Home Series

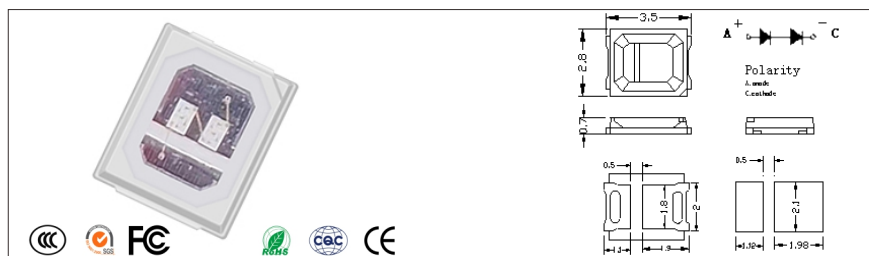


产品参数 Parameters

2835高压蓝光High Voltage Blue

电流 Current	电压 Voltage	亮度 Brightness	光效 Light Efficiency	波长 Wave Length	峰值波长 Peak Wave Length
15mA	72-74V	29-31LM	28-30LM/W	460-465nm	457-462nm
20mA	54-56V	26-28LM	24-26LM/W	460-465nm	457-462nm
30mA	36-38V	24-26LM	22-24LM/W	460-465nm	455-460nm
55mA	18-20V	22-24LM	22-24LM/W	460-465nm	455-460nm

应用范围 Applications

广泛应用于蓝牙灯, WIFI灯, 智能蜡烛灯, 智能球泡灯等智能家居照明领域。
Widely used in blue tooth, WIFI Light, smart candle light, smart bulb and other smart home lighting fields.

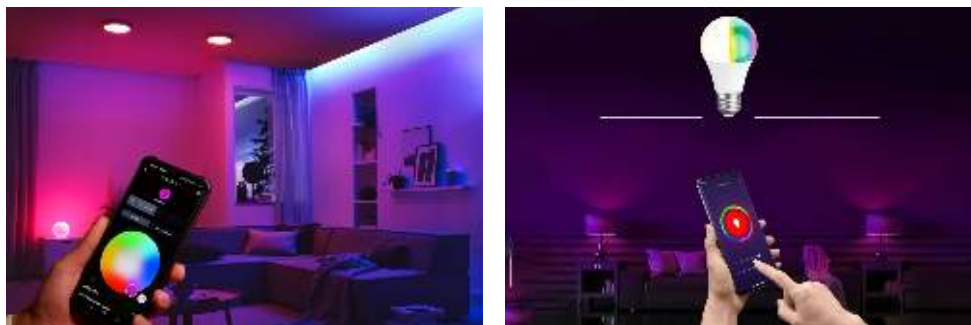

智能家居系列 Smart Home Series



产品参数 Parameters

EMC3030RGB					
电流 Current	电压 Voltage	亮度 Brightness	光效 Light Efficiency	波长 Wave Length	峰值波长 Peak Wave Length
150mA	2.0-2.2V	20-25LM	60-65LM/W	620-625nm	630-635nm
150mA	3.0-3.2V	35-40LM	80-85LM/W	520-525nm	517-522nm
150mA	3.0-3.2V	10-12LM	20-25LM/W	460-465nm	457-462nm

应用范围 Applications

广泛应用于蓝牙灯, WIFI灯, 智能蜡烛灯, 智能球泡灯等智能家居照明领域。
Widely used in blue tooth, WIFI Light, smart candle light, smart bulb and other smart home lighting fields.



RGB系列 RGB Series



产品参数 Parameters

5050RGB					
电流 Current	电压 Voltage	亮度 Brightness	光效 Light Efficiency	波长 Wave Length	峰值波长 Peak Wave Length
20mA	2.0-2.2V	1-2LM	30-35LM/W	620-625nm	630-635nm
20mA	3.0-3.2V	3-4LM	55-60LM/W	520-525nm	517-522nm
20mA	3.0-3.2V	1-2LM	20-25LM/W	460-465nm	457-462nm

应用范围 Applications

广泛应用于摄影灯, 舞台灯, 楼宇亮化, 洗墙灯, 智能灯具等照明领域。
Widely used in photography light, stage light, building lighting, wall washerlight, intelligent light, etc.



RGB系列 RGB Series



产品参数 Parameters

3030RGB						
型号 Model	电流 Current	电压 Voltage	亮度 Brightness	光效 Light Efficiency	波长 Wave Length	峰值波长 Peak Wave Length
3030RGB	60mA	2.0-2.2V	8-10LM	67-72LM/W	620-625nm	630-635nm
	60mA	3.0-3.2V	20-22LM	95-105LM/W	520-525nm	517-522nm
	60mA	3.0-3.2V	4-6 LM	22-24LM/W	460-465nm	457-462nm

应用范围 Applications

广泛应用于摄影灯, 舞台灯, 楼宇亮化, 洗墙灯, 智能灯具等照明领域。
Widely used in photography light, stage light, building lighting, wall washerlight, intelligent light, etc.



RGB系列 RGB Series



产品参数 Parameters

5053RGB					
电流 Current	电压 Voltage	亮度 Brightness	光效 Light Efficiency	波长 Wave Length	峰值波长 Peak Wave Length
150mA	2.0-2.2V	20-22LM	65-70LM/W	620-625nm	630-635nm
150mA	3.0-3.2V	40-45LM	85-90LM/W	520-525nm	517-522nm
150mA	3.0-3.2V	10-12LM	20-25LM/W	460-465nm	457-462nm

应用范围 Applications

广泛应用于摄影灯, 舞台灯, 楼宇亮化, 洗墙灯, 智能灯具等照明领域。
Widely used in photography light, stage light, building lighting, wall washerlight, intelligent light, etc.



RGB系列 RGB Series



产品参数 Parameters


5054RGB					
电流 Current	电压 Voltage	亮度 Brightness	光效 Light Efficiency	波长 Wave Length	峰值波长 Peak Wave Length
300mA	2.0-2.2V	40-45LM	65-75LM/W	620-625nm	630-635nm
300mA	3.0-3.2V	80-85LM	80-95LM/W	520-525nm	517-522nm
300mA	3.0-3.2V	20-25LM	20-30LM/W	460-465nm	457-462nm

应用范围 Applications

广泛应用于摄影灯, 舞台灯, 楼宇亮化, 洗墙灯, 智能灯具等照明领域。
Widely used in photography light, stage light, building lighting, wall washerlight, intelligent light, etc.



RGB系列 RGB Series

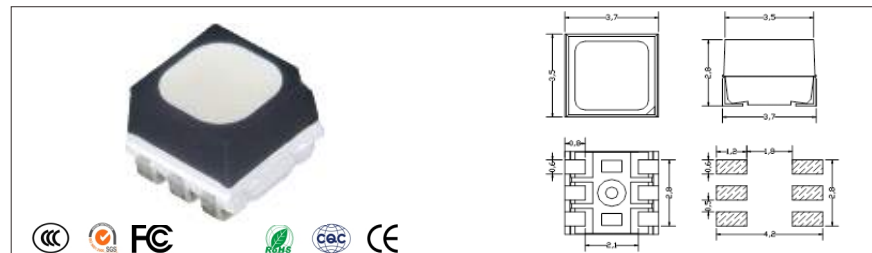

产品参数 Parameters

3535RGB					
电流 Current	电压 Voltage	亮度 Brightness	光效 Light Efficiency	波长 Wave Length	峰值波长 Peak Wave Length
20mA	2.0-2.2V	1.2-2.2LM	30-35LM/W	620-625nm	630-635nm
20mA	3.0-3.2V	4-6 LM	60-70LM/W	515-525nm	517-522nm
20mA	3.0-3.2V	1.2-1.8LM	20-25LM/W	460-470nm	457-465nm

应用范围 Applications

广泛应用于摄影灯, 舞台灯, 楼宇亮化, 洗墙灯, 智能灯具等照明领域。
Widely used in photography light, stage light, building lighting, wall washerlight, intelligent light, etc.



RGB系列 RGB Series



产品参数 Parameters


2835RGB				
电流 Current	电压 Voltage	亮度 Brightness	波长 Wave Length	峰值波长 Peak Wave Length
20mA	2.0-2.2V	1-3LM	620-625nm	630-635nm
20mA	3.0-3.2V	4-6LM	520-525nm	517-522nm
20mA	3.0-3.2V	1-2LM	460-465nm	457-462nm

应用范围 Applications

广泛应用于摄影灯, 舞台灯, 楼宇亮化, 洗墙灯, 智能灯具等照明领域。
Widely used in photography light, stage light, building lighting, wall washerlight, intelligent light, etc.



RGB系列 RGB Series

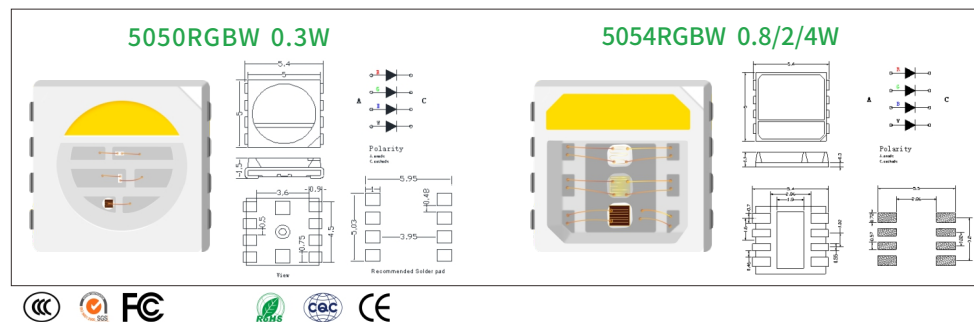


产品参数 Parameters

5054RGBW				
电流 Current	电压 Voltage	亮度 Brightness	波长 Wave Length	峰值波长 Peak Wave Length
60mA	2.0-2.2V	6-8LM	620-625nm	630-635nm
60mA	3.0-3.2V	13-15LM	520-525nm	517-522nm
60mA	3.0-3.2V	4-5LM	460-465nm	457-462nm
60mA	3.0-3.2V	18-21LM		

应用范围 Applications

广泛应用于摄影灯, 舞台灯, 楼宇亮化, 洗墙灯, 智能灯具等照明领域。
Widely used in photography light, stage light, building lighting, wall washerlight, intelligent light, etc.

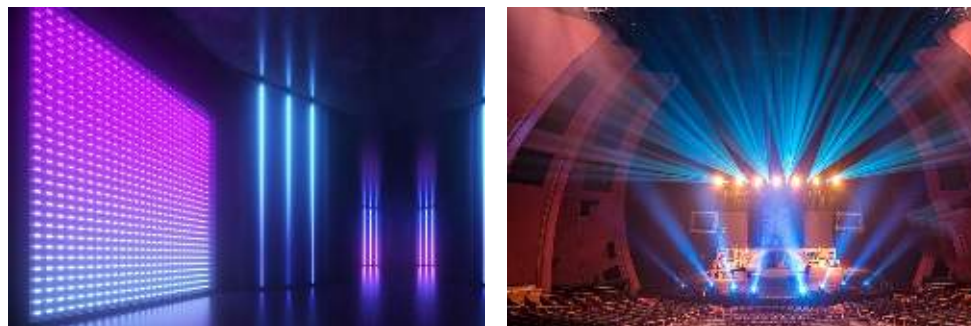

RGB系列 RGB Series



产品参数 Parameters

5054RGBWW


电流 Current	电压 Voltage	亮度 Brightness	色温 Color Temperature	波长 Wave Length	峰值波长 Peak Wave Length
20mA	2.8-3.2V	5-7LM	2700-3500K		
20mA	2.0-3.2V	1-3LM		620-625nm	630-635nm
20mA	3.0-3.2V	4-6LM		520-525nm	517-522nm
20mA	3.0-3.2V	1-2LM		460-465nm	457-462nm
20mA	3.0-3.2V	6-8LM	5500-6500K		

应用范围 Applications

广泛应用于摄影灯, 舞台灯, 楼宇亮化, 洗墙灯, 智能灯具等照明领域。
Widely used in photography light, stage light, building lighting, wall washer light, intelligent light, etc.



双色温系列 Bi-color Series

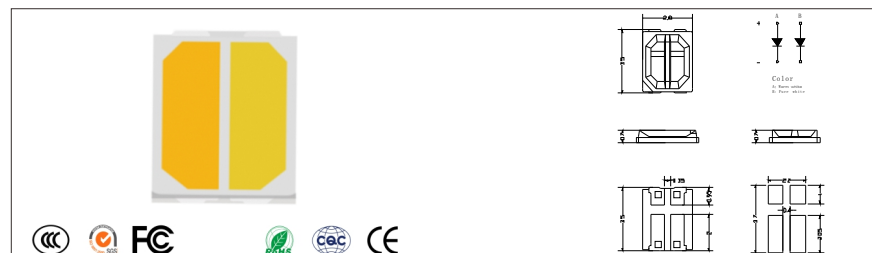

产品参数 Parameters

2835双色温 Bi-color Series


电流 Current	电压 Voltage	色温 Color Temperature	显指 CRI/RA	亮度 Brightness	光效 Light Efficiency
60mA	2.8-3.0V	6500K	80	32-34LM	190-200LM/W
60mA	2.8-3.0V	2700K	80	30-32LM	180-190LM/W

应用范围 Applications

广泛应用于吸顶灯, 筒灯, 射灯, 摄影灯, 光疗灯, 补光灯等照明领域。
Widely used in ceiling light, downlight, spot light, photography light, phototherapy light, fill light and other lighting fields.



双色温系列 Bi-color Series

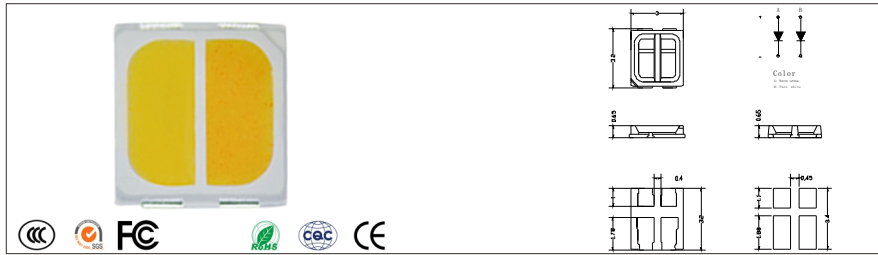

产品参数 Parameters


3030双色温 Bi-color Series					
电流 Current	电压 Voltage	色温 Color Temperature	显指 CRI/RA	亮度 Brightness	光效 Light Efficiency
150mA	3.0-3.2V	6500K	80	78-83LM	180-190LM/W
150mA	3.0-3.2V	2700K	80	75-80LM	170-180LM/W

应用范围 Applications

广泛应用于吸顶灯，筒灯，射灯，摄影灯，光疗灯，补光灯等照明领域。
Widely used in ceiling light, downlight, spot light, photography light, phototherapy light, fill light and other lighting fields.



双色温系列 Bi-color Series

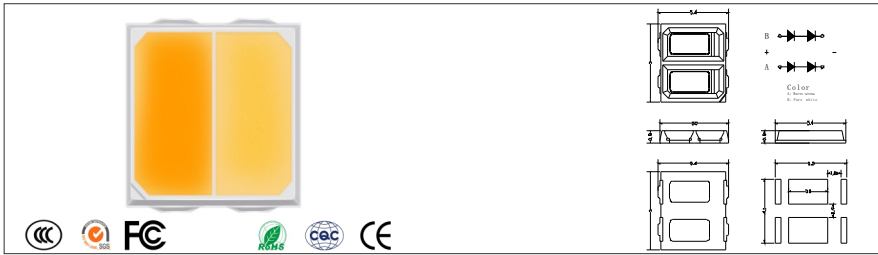

产品参数 Parameters

5054双色温 Bi-color Series					
电流 Current	电压 Voltage	色温 Color Temperature	显指 CRI/RA	亮度 Brightness	光效 Light Efficiency
150mA	6.0-6.2V	6500K	80	160-170LM	180-190LM/W
150mA	6.0-6.2V	2700K	80	150-160LM	170-180LM/W

应用范围 Applications

广泛应用于吸顶灯，筒灯，射灯，摄影灯，光疗灯，补光灯等照明领域。
Widely used in ceiling light, downlight, spot light, photography light, phototherapy light, fill light and other lighting fields.



植物照明系列 Plant Growth Lighting Series



产品参数 Parameters

2835植物红Plant Red

电流 Current	电压 Voltage	波长 Wave Length	亮度 Brightness	光效 Light Efficiency	PPF $\mu\text{mol/s}$
150mA	2.0-2.2V	660-665nm	8-10LM	25-30LM/W	2.4-2.6
60mA	1.9-2.1V	660-665nm	3-4LM	30-35LM/W	2.7-2.9

应用范围 Applications

广泛应用于叶类蔬菜, 组织培养, 花卉盆栽, 瓜果类等植物补光照明领域。
Widely used in leaf vegetables, tissue culture, potted flowers, fruits and other plant lighting fields.



植物照明系列 Plant Growth Lighting Series



产品参数 Parameters

5054植物红Plant Red

电流 Current	电压 Voltage	波长 Wave Length	亮度 Brightness	光效 Light Efficiency	PPF $\mu\text{mol/s}$
350mA	2.0-2.2V	660-665nm	25-30LM	40-45LM/W	2.8-3.0
150mA	1.9-2.1V	660-665nm	12-14LM	40-45LM/W	3.0-3.2
60mA	1.8-2.0V	660-665nm	4-6LM	40-45LM/W	3.1-3.3

应用范围 Applications

广泛应用于叶类蔬菜, 组织培养, 花卉盆栽, 瓜果类等植物补光照明领域。
Widely used in leaf vegetables, tissue culture, potted flowers, fruits and other plant lighting fields.



植物照明系列 Plant Growth Lighting Series



产品参数 Parameters

3030对等植物灯 MI Plant Light

电流 Current	电压 Voltage	色温 Color Temperature	显指 CRI/RA	亮度 Brightness	光效 Light Efficiency	PPF $\mu\text{mol/s}$
65mA	2.7-2.9V	5000K	80	38-40LM	210-220LM/W	3.0-3.1
65mA	2.7-2.9V	3500K	80	37-39LM	210-220LM/W	2.95-3.05

应用范围 Applications

广泛应用于叶类蔬菜，组织培养，花卉盆栽，瓜果类等植物补光照明领域。

Widely used in leaf vegetables, tissue culture, potted flowers, fruits and other plant lighting fields.



植物照明系列 Plant Growth Lighting Series



产品参数 Parameters

3030球头植物红Plant Red with Lens

电流 Current	电压 Voltage	波长 Wave Length	亮度 Brightness	光效 Light Efficiency	PPF $\mu\text{mol/s}$
350mA	2.0-2.2V	650-660nm	27-32LM	40-45LM/W	3.6-3.7
150mA	1.8-2.0V	650-660nm	12-14LM	45-50LM/W	3.8-4.0
60mA	1.7-1.9V	650-660nm	4-6 LM	45-50LM/W	3.9-4.1

应用范围 Applications

广泛应用于叶类蔬菜，组织培养，花卉盆栽，瓜果类等植物补光照明领域。

Widely used in leaf vegetables, tissue culture, potted flowers, fruits and other plant lighting fields.



植物照明系列 Plant Growth Lighting Series



产品参数 Parameters


5054球头植物红 Plant Red with Lens					
电流 Current	电压 Voltage	波长 Wave Length	亮度 Brightness	光效 Light Efficiency	PPF $\mu\text{mol/s}$
350mA	2.0-2.2V	650-660nm	40-45LM	40-45LM/W	3.6-3.7
150mA	1.8-2.0V	650-660nm	13-15LM	45-50LM/W	3.8-4.1
60mA	1.7-1.9V	650-660nm	5-7 LM	45-50LM/W	4.0-4.2

应用范围 Applications

广泛应用于叶类蔬菜, 组织培养, 花卉盆栽, 瓜果类等植物补光照明领域。
Widely used in leaf vegetables, tissue culture, potted flowers, fruits and other plant lighting fields.



植物照明系列 Plant Growth Lighting Series

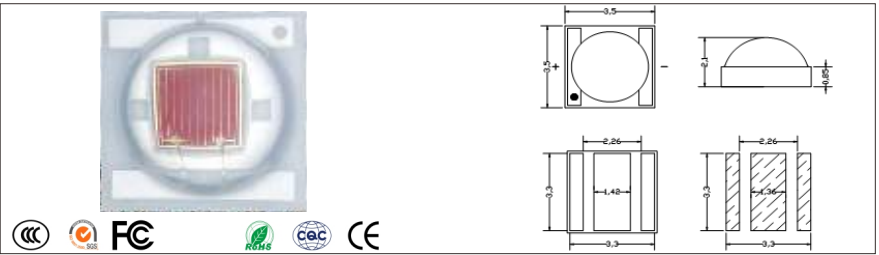

产品参数 Parameters

3535模顶植物红 Plant Red with Lens					
电流 Current	电压 Voltage	波长 Wave Length	亮度 Brightness	光效 Light Efficiency	PPF $\mu\text{mol/s}$
350mA	2.0-2.2V	650-660nm	30-35LM	45-50LM/W	3.2-3.4
150mA	1.8-2.0V	650-660nm	13-15LM	45-50LM/W	3.4-3.6
60mA	1.7-1.9V	650-660nm	5-7LM	50-55LM/W	3.5-3.7

应用范围 Applications

广泛应用于叶类蔬菜, 组织培养, 花卉盆栽, 瓜果类等植物补光照明领域。
Widely used in leaf vegetables, tissue culture, potted flowers, fruits and other plant lighting fields.

