

SINBON



SINBON 香港兴邦实业有限公司
HONGKONG SINBON INDUSTRIAL LIMITED

地址：香港柴湾祥利街29-31号国贸中心2105室
Add.: Room 2105, JSH161, Trend Centre, 29-31
Cheung Lee Street, Chai Wan, HongKong
电话/Tel: 00852-37218451
传真/ Fax: 00852-37218452
邮箱/ Email: sales@sinbon.com.hk
网址/Web: www.sinbon.com.hk

SINBON 上海裕萃电子有限公司
SHANGHAI HARVEST ELECTRONICS CO., LTD.

地址：上海市浦东新区惠南镇城南路168弄3号502
(绿地峰汇B座)
Add.: Rm502, No.3 Lane 168 Chengnan Road,
Huinan Town, Pudong New District,
Shanghai, 201399 China
电话/Tel: 0086-21-20781031
传真/ Fax: 0086-21-20781032
邮箱/ Email: sales@harvestsh.com
网址/Web: www.harvestsh.com



您最友好的合作伙伴
Your friendly partner



SINBON

香港兴邦实业有限公司于2008年在香港成立，致力于智能包装设备的研发设计、生产制造、设备推广和提供自动化产线解决方案。随着国内外业务的发展需要，又先后设立上海裕莘电子有限公司和上海裕航实业有限公司，共同服务于智能机械设备的研发设计、生产制造、设备进出口以及为国内外客户提供技术咨询和售后服务支持等。

兴邦公司配有多个生产研发基地，主要为用户提供各类设备的设计生产及售后技术支持。根据用户的具体需求，提供最合适的解决方案，来协助用户提高生产效率、提升产品质量的控制并降低生产成本。

兴邦公司主营各类灌装机、灌装秤、旋盖机、锁盖机、轧盖机、贴标机、封口机、金属探测机、检针机、除铁器、检重秤、开箱机、封箱机及自动化包装和码垛产线。产品主要用于食品、医药、纺织服装、化工等各行业工厂及实验室。所供设备根据不同需求可实现连线自动化生产或者设备独立工作。

经过多年的发展，兴邦产品远销海内外，在世界绝大多数的国家和地区都有兴邦的设备在工作。兴邦的设备也因其质量优、性能稳定、使用寿命长深受用户的好评。兴邦努力提供最具性价比的设备并根据用户反馈不断优化产品设计来满足用户多样化需求，也真诚期待与您的深化合作！

服务理念：品质第一；优质服务；寻求客户满意！

Hongkong SINBON Industrial Limited was established in 2008 in Hongkong, dedicated to R&D, design, manufacture and promotion sales of intelligent machines and also offer automatic production line solution. Due to domestic and foreign business development, Shanghai Harvest Electronics Co., Ltd. and Shanghai Yuhang Industrial Co., Ltd. were established as subsidiary of SINBON to jointly offer service in the fields of R&D, design, manufacturing, and machinery import and export business, and provide technical consulting and after-sales service support to customers at home and abroad.

SINBON has equipped with multiple production research and development bases, mainly for users to provide various machine design and production and after-sales technical support. According to the specific needs of users, provide the most suitable solutions to assist users in improving production efficiency, improving product quality control and saving production costs.

SINBON offer all kinds of filling machine, drum filling machine, capping machine, labeling machine, induction sealing machine, pouches sealing machine, metal detector, needle detector, metal separator, checkweigher, carton erector, carton sealer and automated packaging and palletizing production lines with related machinery. Our machines are mainly used in factories and laboratories of various industries such as food, medicine, textile and garment, and chemical industry etc. According to different requirements, our machines can realize automatic production online or work independently.

After years of development, SINBON brand machines were working in most countries and regions in the world. SINBON's equipment is popular for its high quality, stable performance and long service life. SINBON strives to provide the most cost-effective equipment and continuously optimizes product design based on user's feedback to meet the diverse needs of users, and sincerely look forward to deepening cooperation with you!


Service Tenet: Quality first; Service highest; Seeking clients' satisfaction



您最友好的合作伙伴
Your friendly partner

台式半自动圆瓶贴标机 TABLETOP SEMI-AUTO ROUND BOTTLE LABELING MACHINE

产品型号 Model No.	SBXT-190
贴标精度 Labeling Accuracy	±1.0mm (不含瓶子和标签尺寸误差) ±1.0mm (Bottle and label size accuracy are not be included)
标签尺寸 Label Size	L: 20-300mm H: 20-230mm
瓶子尺寸 Bottle Size	Φ10-150mm
标签卷内径 Label Roll Inner Size	Φ 76mm
标签卷外径 Label Roll Outer Size	Φ 250mm (最大 Max.)
供电电源 Power Source	AC220V; 50/60Hz; 1P; 1kw
外型尺寸 Dimension	L950 x W540 x H530mm
设备净重 Net Weight	45kg
产品应用 Application	用于各种尺寸的圆瓶透明和不透明标签贴标, 可以选配打码机 Suitable for multiple size round bottles with transparent or non-transparent labels stick on bottles. Coding printer for option

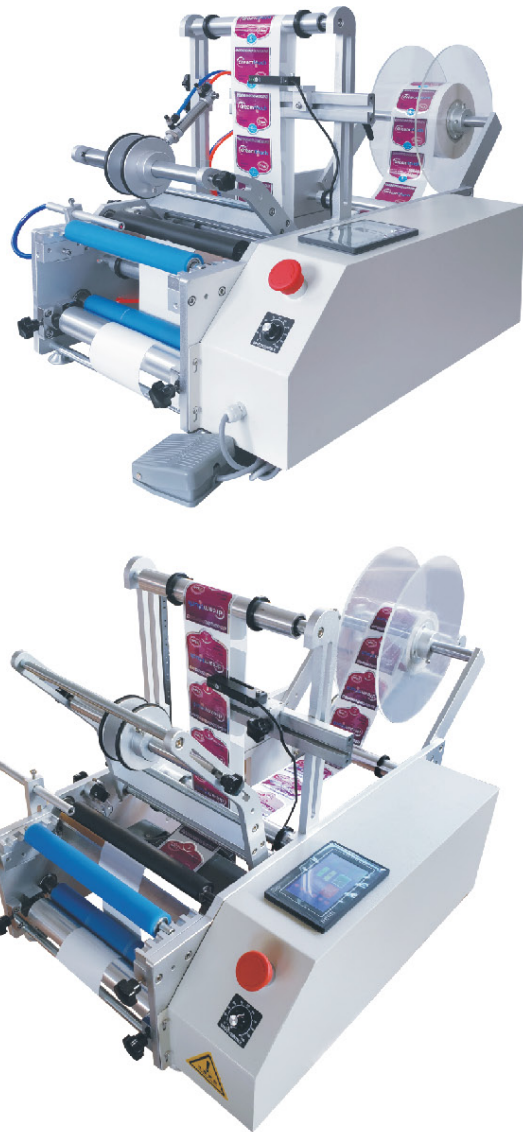

**电磁感应铝箔封口机
INDUCTION SEALING MACHINE**

新型水冷式电磁感应铝箔封口机 NEW WATER COOLING INDUCTION SEALING MACHINE

产品型号 Model No.	DG-3
操控方式 Control Mode	彩色触摸屏 Color Touch Screen
冷却方式 Cooling Type	高速水冷 High Speed Water Cooling
供电电源 Power Source	AC220V±10%; 50/60Hz; 1P; 20A
输出功率 Output Power	Max. 4000W (adjustable)
封口直径 Sealing Size	Φ15mm ~ Φ140mm (≤Φ300mm 可定制) Φ15mm ~ Φ140mm (≤Φ300mm custom made)
封口速度 Sealing Speed	100-750 瓶/分钟 100-750BPM
离地行程 Heating Head Height	770-1180mm (感应头离地高度可调范围) 770-1180mm (Heating Head to floor adjustable height)
设备尺寸 Dimension	主机 Host: 410mmx460mmx320mm 感应头 Heating Head: 310mmx130mmx190mm 水箱 Water Tank: 520mmx450mmx980mm
整机重量 Net Weight	100kg
产品优势 Advantages	专利设计小巧感应头, 可旋转安装, 安装空间需求非常小, 水箱、主机和感应头可在同款机器上互换售后服务简单便捷。 Small size heating head design with patent only take small footprint and it can also rotation installation; Host, heating head and water tank can replace each other on the same model machines, after sales maintenance is simple and convenient for users

产品特点 Product features

- 新型水冷电磁感应铝箔封口机专用于食品、农药、化妆品、粮油化、工等行业的产品封口, 尤其具备异形容器封口的独特功能。
- 具有堵瓶自动停机的功能, 防止意外生产事故扩大。
- 主机防腐设计, 器件电路和冷却风道完全隔离设计, 大幅度提高设备自身工作的可靠性和寿命。
- 具有外控联机功能, 方便生产线的系统整合及远程监控。
- 正面彩屏丰富信息界面及操控, 视觉良好, 操作便捷。
- 外壳选用优质304不锈钢合理设计, 符合GMP要求。
- 兼容各种封口功能, 特别针对异形容器, 封口均匀漂亮。
- 感应器: 独特的隧道式结构, 全方位立体式感应封口, 功率强劲。感应器可旋转、可互换, 适用于大小口径不一的瓶子封口, 一机多用, 节约成本。
- 高性能主机: 主机全方位防腐, 低EMI设计, 抗浪涌设计, 输出电压稳定, 具备过压、过流、过热等智能保护功能, 性能稳定可靠。
- 高效智能水箱: 实时监控水流量和水温, 水箱缺水或水温过高, 均可自动报警, 方便检查, 使主机和感应器能长期稳定可靠工作。
- 全新的模块智能盒子技术: 设备防腐、防潮、防尘、防电磁干扰, 使用寿命长, 维护方便, 大大降低成本。

- Newly designed water cooling induction sealing machine is used to seal aluminium foil on bottle mouth and suitable for complicated-shape bottle sealing too
- It can auto stop sealing function when meet bottle jam on production line
- Anticorrosion design, machine's circuit and cooling air duct are completely isolated design, which greatly improves reliability and working life of machine
- There is external control function, it is convenient for system integration and remote monitoring of production line.
- Color screen display, with good vision and convenient operation
- The cover made by SUS304 meet GMP requirement
- Compatible with various sealing functions, especially for special-shaped containers, sealing performance good Patented sealing sensor: unique tunnel structure, all-dimensional induction sealing, strong power. The sensor is rotatable and interchangeable. It is suitable for sealing bottles of different sizes and diameters. One machine is multi-purpose and saves costs.
- High-performance host: The host has comprehensive anti-corrosion, low-EMI design, anti-surge design, stable output voltage, and intelligent protection

functions such as over-voltage, over-current, and over-heating. Efficient intelligent water tank: real-time monitoring of water flow and water temperature, the water tank is short of water or the water temperature is too high, can automatically alarm, convenient checking, so that the host and sensors can work stably and reliably for a long time.

- New module smart box technology: equipment anti-corrosion, moisture-proof, dust-proof, electromagnetic interference prevention, long service life, easy maintenance, greatly reduce costs.



水冷式电磁感应铝箔封口机 WATER COOLING INDUCTION SEALER

产品型号 Model No.	DG-5000A	
操控方式 Control Mode	触摸面板 Touch Pad	
冷却方式 Cooling Type	高速水冷 High Speed Water Cooling	
供电电源 Power Source	AC220V±10%;50/60Hz;1P; 20A	
输出功率 Output Power	Max. 4000W (adjustable)	
封口直径 Sealing Size	Φ15mm ~ Φ140mm (≤Φ300mm 可定制) Φ15mm ~ Φ140mm (≤Φ300mm custom made)	
封口速度 Sealing Speed	50-600 瓶/分钟 50-600BPM	
离地行程 Heating Head Height	760-1180mm (感应头离地高度可调范围) 760-1180mm (Heating Head to floor adjustable height)	
设备尺寸 Dimension	主机 Host: 410mmx460mmx320mm 感应头 Heating Head: 310mmx130mmx190mm 水箱 Water Tank: 520mmx450mmx980mm	
整机重量 Net Weight	75kg	
产品优势 Advantages	专利设计小巧感应头,可旋转安装,安装空间需求非常小,水箱、主机和感应头可在同款机器上互替换后服务简单便捷。 Small size heating head design with patent only take small footprint and it can also rotation installation; Host, heating head and water tank can replace each other on the same model machines, after sales maintenance is simple and convenient for users	

产品特点 Product features

- 低EMI设计:大幅降低了对电网谐波污染,有效提高自身设备的性能和可靠性,同时保护了周边的用电设备可靠运行;
- 抗浪涌设计:设备每次遇市电时,市电流缓慢上升到规定值,对电网没有硬冲击,同时满足自身大功率用电要求;
- 主机防腐设计:304不锈钢外壳材质,器件电路和冷却风道完全隔离设计,有效防止主电路器件被腐蚀性气体腐蚀,从而提高设备自身工作的可靠性和寿命;
- 加热感应器:独特的隧道式结构,多方位立体感应模式使封口效果更理想,电磁输出稳定均匀且功率强悍,能兼容各种瓶型封口。感应器可旋转、可互换,适用于大小口径不一的瓶子封口,一机多用,节约成本;
- 输出电压稳定:在市电波动或负载变化大的情况下,系统会自动稳定加热头的输出有效电压,不会过高过低,或者忽高忽低,保持封口效果的一致性,避免出现部分瓶子封口不良的现象;
- 性能稳定可靠:机器拥有特殊设计和完善的自我诊断及保护系统,在各种极限条件下(如过热、过载、缺水及市电异常等),设备均可以及时自我保护,对外智能声光报警,可以准确判断故障点位,方便用户检查和解除故障;
- 人性化操作界面:采用全数字化控制理念,具有掉电记忆功能,数字显示,面板轻触按键设计,操作极其简单方便;
- 搭配智能水箱:该水箱为加热头提供循环冷却水,能实时监测循环水流量和水温度,并提供故障(缺水或过热)报警及诊断,使主机和感应器能长期稳定可靠工作,同时大幅提高感应头输出功率、延长感应器寿命。
- 同水冷设备均可互换通用:有效降低使用成本,维护更方便。
- 全新的模块智能盒子技术:设备防腐、防潮、防尘、防电磁干扰,使用寿命长,方便维护,大大降低成本。

- Rotating Heating Head installation can be suitable for all kinds of bottles; No limit on cap size, bottle size, cap and bottle shape etc. Only one machine can seal all your bottles, save machine purchase costs.
- The same model sealing heads, water tank and host can be replaced by each other; Save maintenance costs in near future
- It is suitable for all shape of bottles and caps, especially for complicated-shape caps
- Latest designed modular technology which ensure machine has good performance on anti-corrosion, moisture-proof, dustproof and anti-EMI

and has longer working life
High Speed Circulating water cooling system ensure machine has stronger power and high working efficiency
● Smart Heating Head with smaller size and working with minimum conveyor length 1000mm
Built-in power supply stabilizer ensure constant output power, power grid volatility can work normally
It has self-protection functions when over heat, over load, water shortage occur and self diagnosis function
● Cooling system adopts the mute design and effectively reduce the noise in working environment
Power is adjustable based on special power supply unit, don't need preheat the machine when power on, easy to operate
● The structures of machine used stainless steel 304, easy clean and beauty, in accord with GMP requirements



风冷型电磁感应铝箔封口机 WIND-COOLING INDUCTION SEALER

产品型号 Model No.	DG-3000E	DG-3000F
冷却方式 Cooling Type	风冷 Wind-Cooling	
供电电源 Power Source	AC220V±10%;50/60Hz;1P; 20A	
输出功率 Output Power	Max. 3000W (adjustable)	
封口直径 Sealing Size	Φ20-80mm /Φ70-110mm	
封口速度 Sealing Speed	40-280 瓶/分钟 40-280BPM	
离地行程 Heating Head Height	900-1140mm (感应头离地高度可调范围) 900-1140mm (Heating Head to floor adjustable height)	840-1260mm (感应头离地高度可调范围) 840-1260mm (Heating Head to floor adjustable height)
设备尺寸 Dimension	主机 Host: 395x420x185mm 感应头 Heating Head: 660x210x210mm /570x250x210mm	主机 Host: 245x160x650mm 感应头 Heating Head: 660x210x210mm /570x250x210mm
整机重量 Net Weight	75kg	65kg

产品特点 Product features

- 隐形式感应器风冷系统,独特的升降台整合设计。
- 擅长封广口瓶,封口均匀漂亮。
- 信息丰富的彩屏操控界面置于感应器正面,操作便捷,视觉良好。
- 薄膜轻触开关,防尘防腐防污,使用寿命更长更安全。
- 模块化全数字高精度电路控制系统确保输出稳定,不受市电活动影响。
- 可调功率开关电源,开机即用无需预热,操作简便。
- 新型智能冷却系统有效保障电路长时间稳定工作。
- 全新的核心模块:设备防腐、防潮、防尘、性能稳定,使用寿命长,维护便捷,大大降低成本。
- 防止药液、颗粒、异物直接掉入感应器内,使用寿命更长。

- Digital wind cooling system ensure machine has stronger power and high working efficiency
- Built-in power supply stabilizer ensure constant output power, power grid volatility can work normally
- It has self-protection functions when over heat, over load, water shortage occur and self diagnosis function
- Power is adjustable based on special power supply unit, don't need preheat the machine when power on, easy to operate
- The structures of machine used stainless steel 304, easy clean and beauty, in accord with GMP requirements



台式连续电磁感应封口机 TABLETOP CONTINUOUS INDUCTION SEALING MACHINE

产品型号 Model No.	LX-6000A
冷却方式 Cooling Type	风冷 Wind- Cooling
供电电源 Power Source	AC220V±10%;50/60Hz;1P
设备功率 Power	输入功率 Input Power ≥1200W 输出功率 Output Power ≤300W
封口直径 Sealing Size	Φ20-80mm
封口速度 Sealing Speed	0-10m/min.
瓶子高度 Bottle Height	20-300mm
设备尺寸 Dimension	1120x470x590mm
最大载重 Loading Weight	≤3kg
产品应用 Application	自动进行瓶子的铝箔封口 Auto induction sealing bottles mouth via aluminum foil



手持式电磁感应铝箔封口机 HANDHELD INDUCTION SEALER

产品型号 Model No.	DCGY-F200	DCGY-F300	DCGY-F500	DCGY-F1000
封口直径 Sealing Size	Φ20-80mm	Φ15-50mm	Φ20-100mm	Φ70-130mm
冷却方式 Cooling Type	风冷 Wind- Cooling			
供电电源 Power Source	AC220V±10%;50/60Hz;1P			
设备功率 Power	输入功率 Input Power ≥1200W 输出功率 Output Power ≤300W			
产量计数 Counter	0-9999			
产品尺寸 Dimension	280x230x115mm			
产品应用 Application	手动进行瓶子的铝箔封口 Manual induction sealing bottles mouth via aluminum foil			

