KDC-A11型電源開關系列 Power switch series

◆ 特點和用途 Characteristics and usage

- 具有快速動作的特點

  Quick action

- 扁平形，結構緊凑，體積小。

  Flat type, tight configuration, small size.

- 可承受大電流和浪涌電流

  Endure big current and inrush current

- 廣泛應用于彩電、音頻裝置、計算機及外圍設備，

  儀器儀表、電子設備等。

  Widely used in color TV, audio device, computer

  and its peripheral equipment, apparatus and instruments, electronic equipment etc.

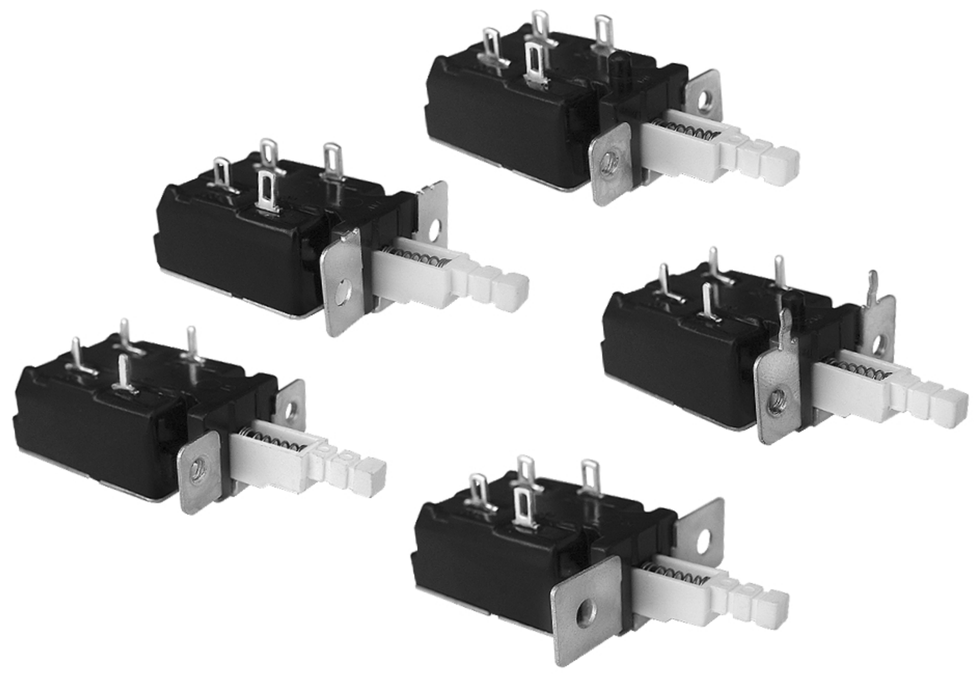

◆ 技術特性 Technical Characteristics

項目 Item		特性值 Value
環境温度 Environment temperature		–10～+85℃
相對濕度 Relative humidity		95%,40℃
額定值 Ratings		TV–8 125VAC,10GPA125/250VAC 10A125/250VAC, 4A/128A250VAC, 8A/128A250VAC
工作行程/全行程 Operating travel/full travel		2.5mm/3.5mm
動作力 Operating force		3.5～7.5N
電路 Circuit		雙刀單擲 DPST
絶緣電阻 Insulation resistance		≥100MΩ
接觸電阻 Contact resistance		≤50mΩ
耐電壓 Test voltage	同極不相接端子間 Between each terminals of the same polarity	AC2000V
	帶電金屬零件與地(外殼)之間、接綫端與不帶電金屬件之間 Between current–carrying metal parts and ground(case),and between each terminal and non–current–carrying metal parts.	AC4000V
電氣壽命 Electrical life		10,000次/cycles
質量 Weight		約12.1g Approx. 12.1g
安全認證 Safety approvals		UL、CUL、VDE、ENEC、SEMKO、DEMKO、NEMKO、FIMKO、CE、EK、CQC

◆ 型號規格命名及含義 Model number legend and meanings

KDC–A11–□ □ □ □
1 2 3 4

1 端子類型 Terminal types	1：焊接端子 Solder terminal 2：PCB端子 PCB terminal 3：快接端子 Quick–connect terminal	**3** 蓋板支脚和 塑殼定位柱 Frame tab and case fixed pole	0：無支脚，無定位柱 No frame tab, no case fixed pole 1：有支脚，有定位柱 Frame tab, case fixed pole 2：無支脚，有定位柱 No frame tab, case fixed pole 3：有支脚，無定位柱 Frame tab, no case fixed pole
2 安裝孔類型 Mounting hole types	0：無安裝孔 No mounting hole 1：螺孔M3 Screw hole M3 2：光孔Φ3.2 HoleΦ3.2	**4** 附加代號 Additional code	用A、B、C……表示與基本型有差异或有特殊要求 A,B,C ……indicate different or special requirements with basic type

◆ 外形和安裝尺寸 Outline and mounting dimensions

KDC–A11–110

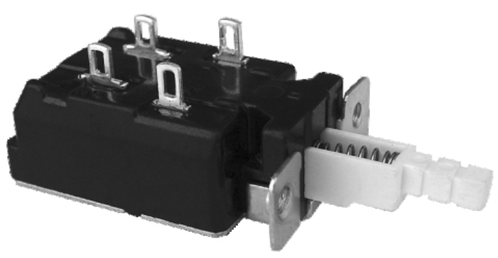

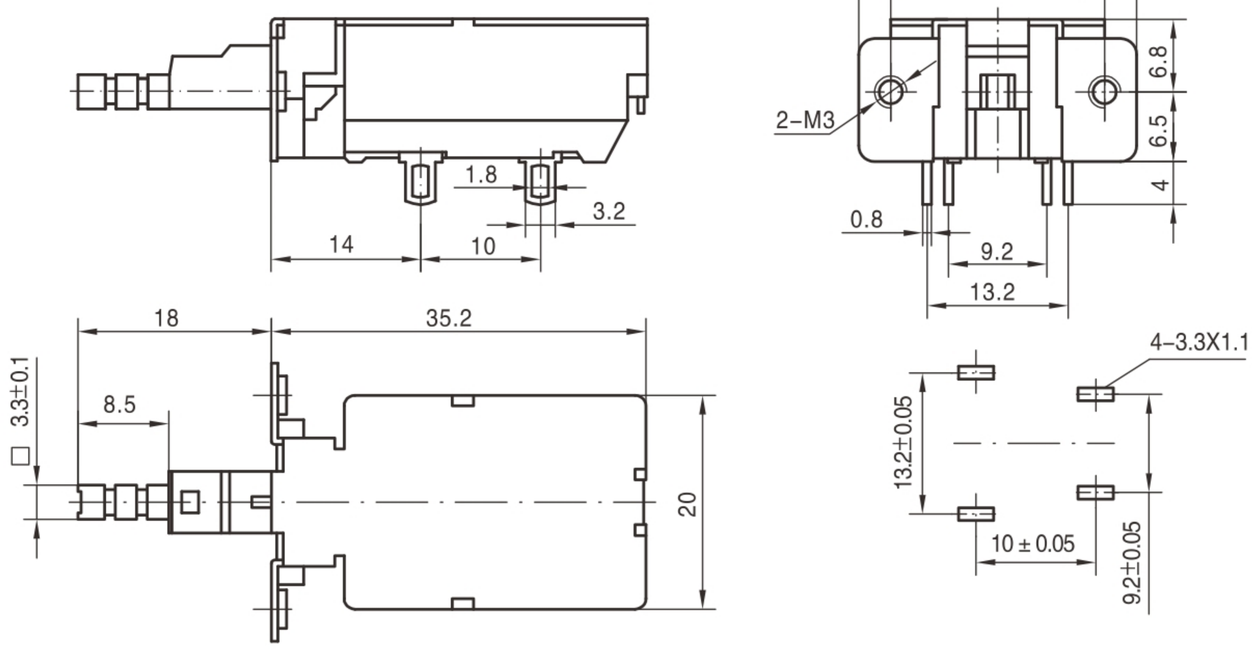

外形和安装尺寸 Outline and mounting dimensions

KDC-A11-120

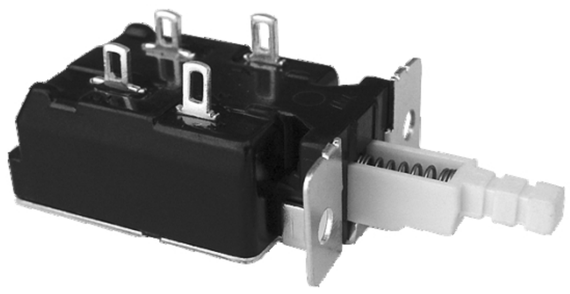

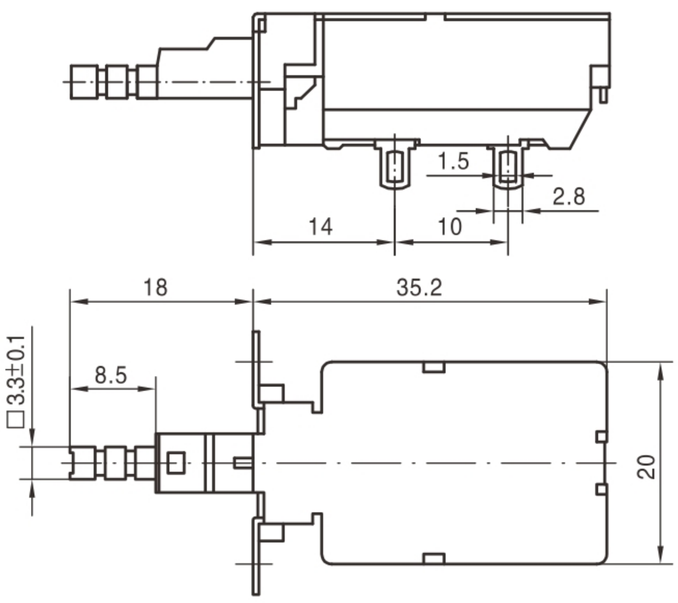

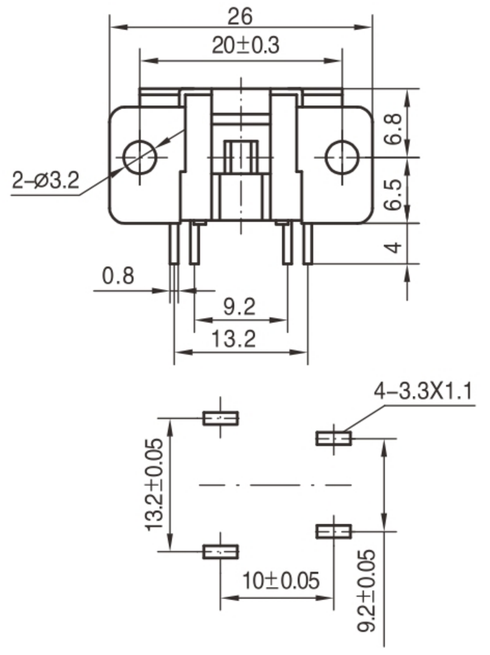

KDC-A11-210

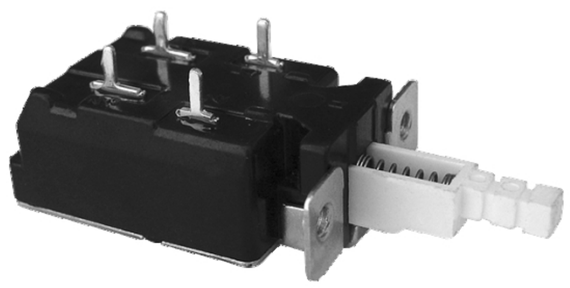

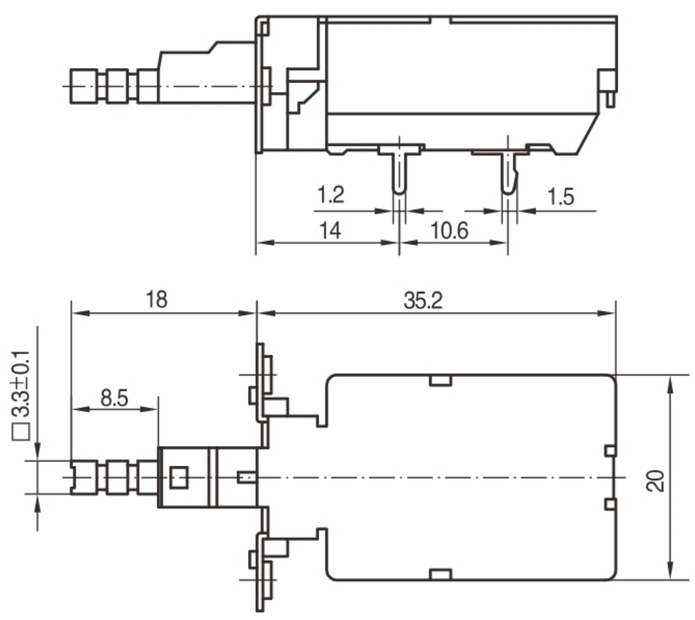

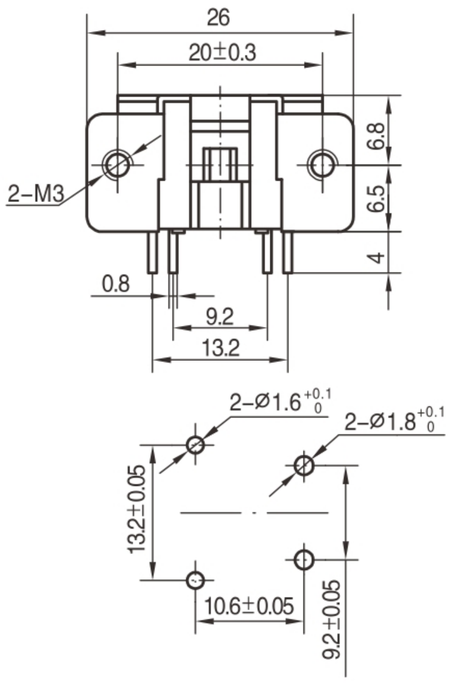

KDC-A11-220

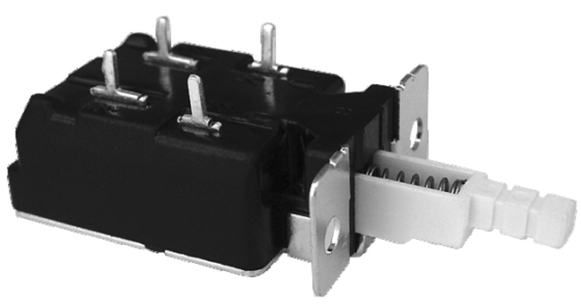

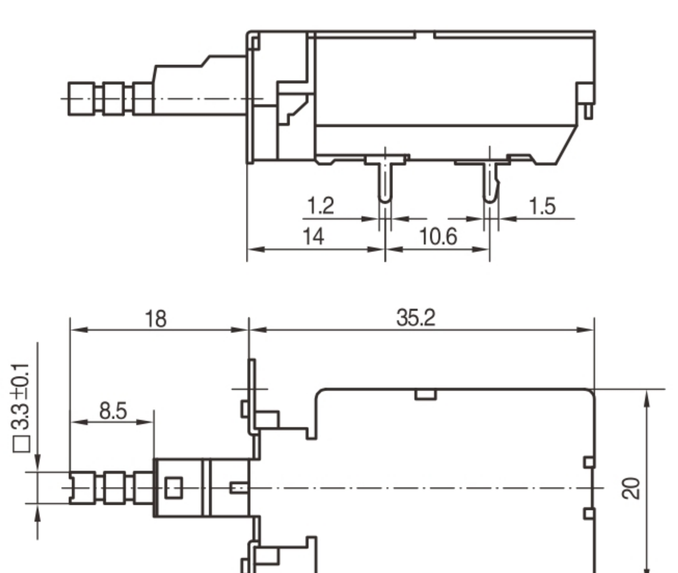

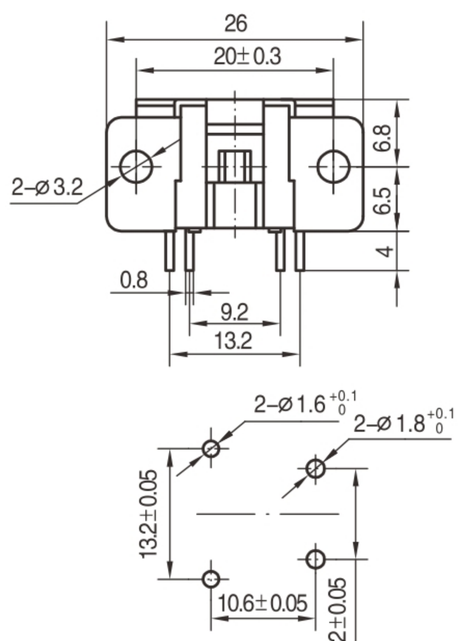

KDC-A11-221

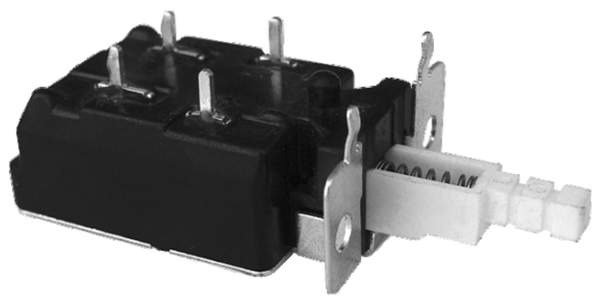

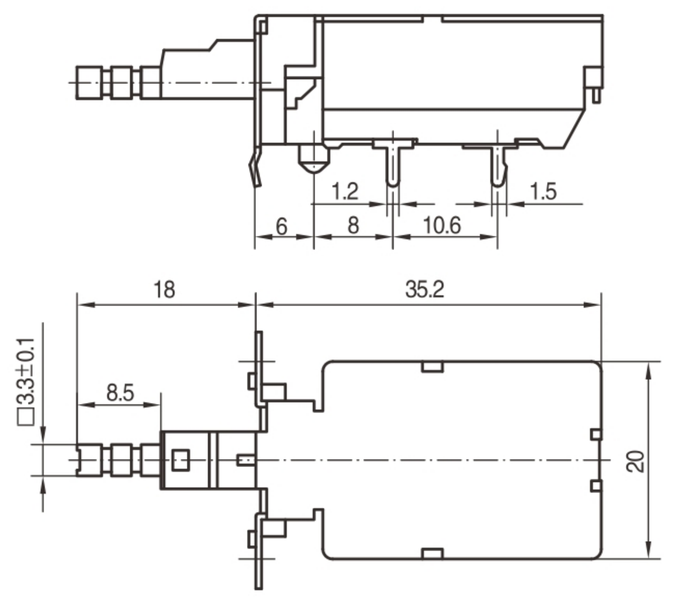

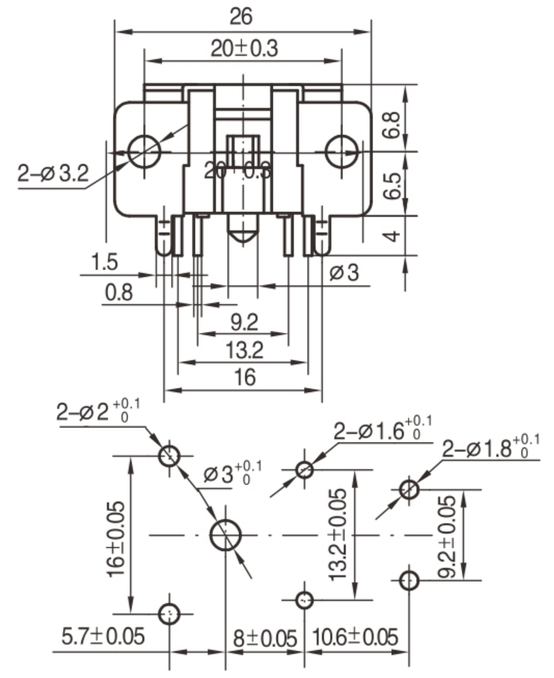

To provide a safe and reliable on-off service, let electric appliances more perfect