


KDC-A04型電源開關系列 Power switch series

◆ 特點和用途 Characteristics and usage

- 具有快速動作的特點
Quick action
- 可承受大電流和浪涌電流
Endure big current and inrush current
- 可靠性高，壽命長。
Long life, high reliability.
- 廣泛應用於電視機、音頻裝置、計算機及外圍設備等。
Widely used in color TV, audio device, computer and its peripheral equipment, apparatus and instruments, electronic equipment etc.

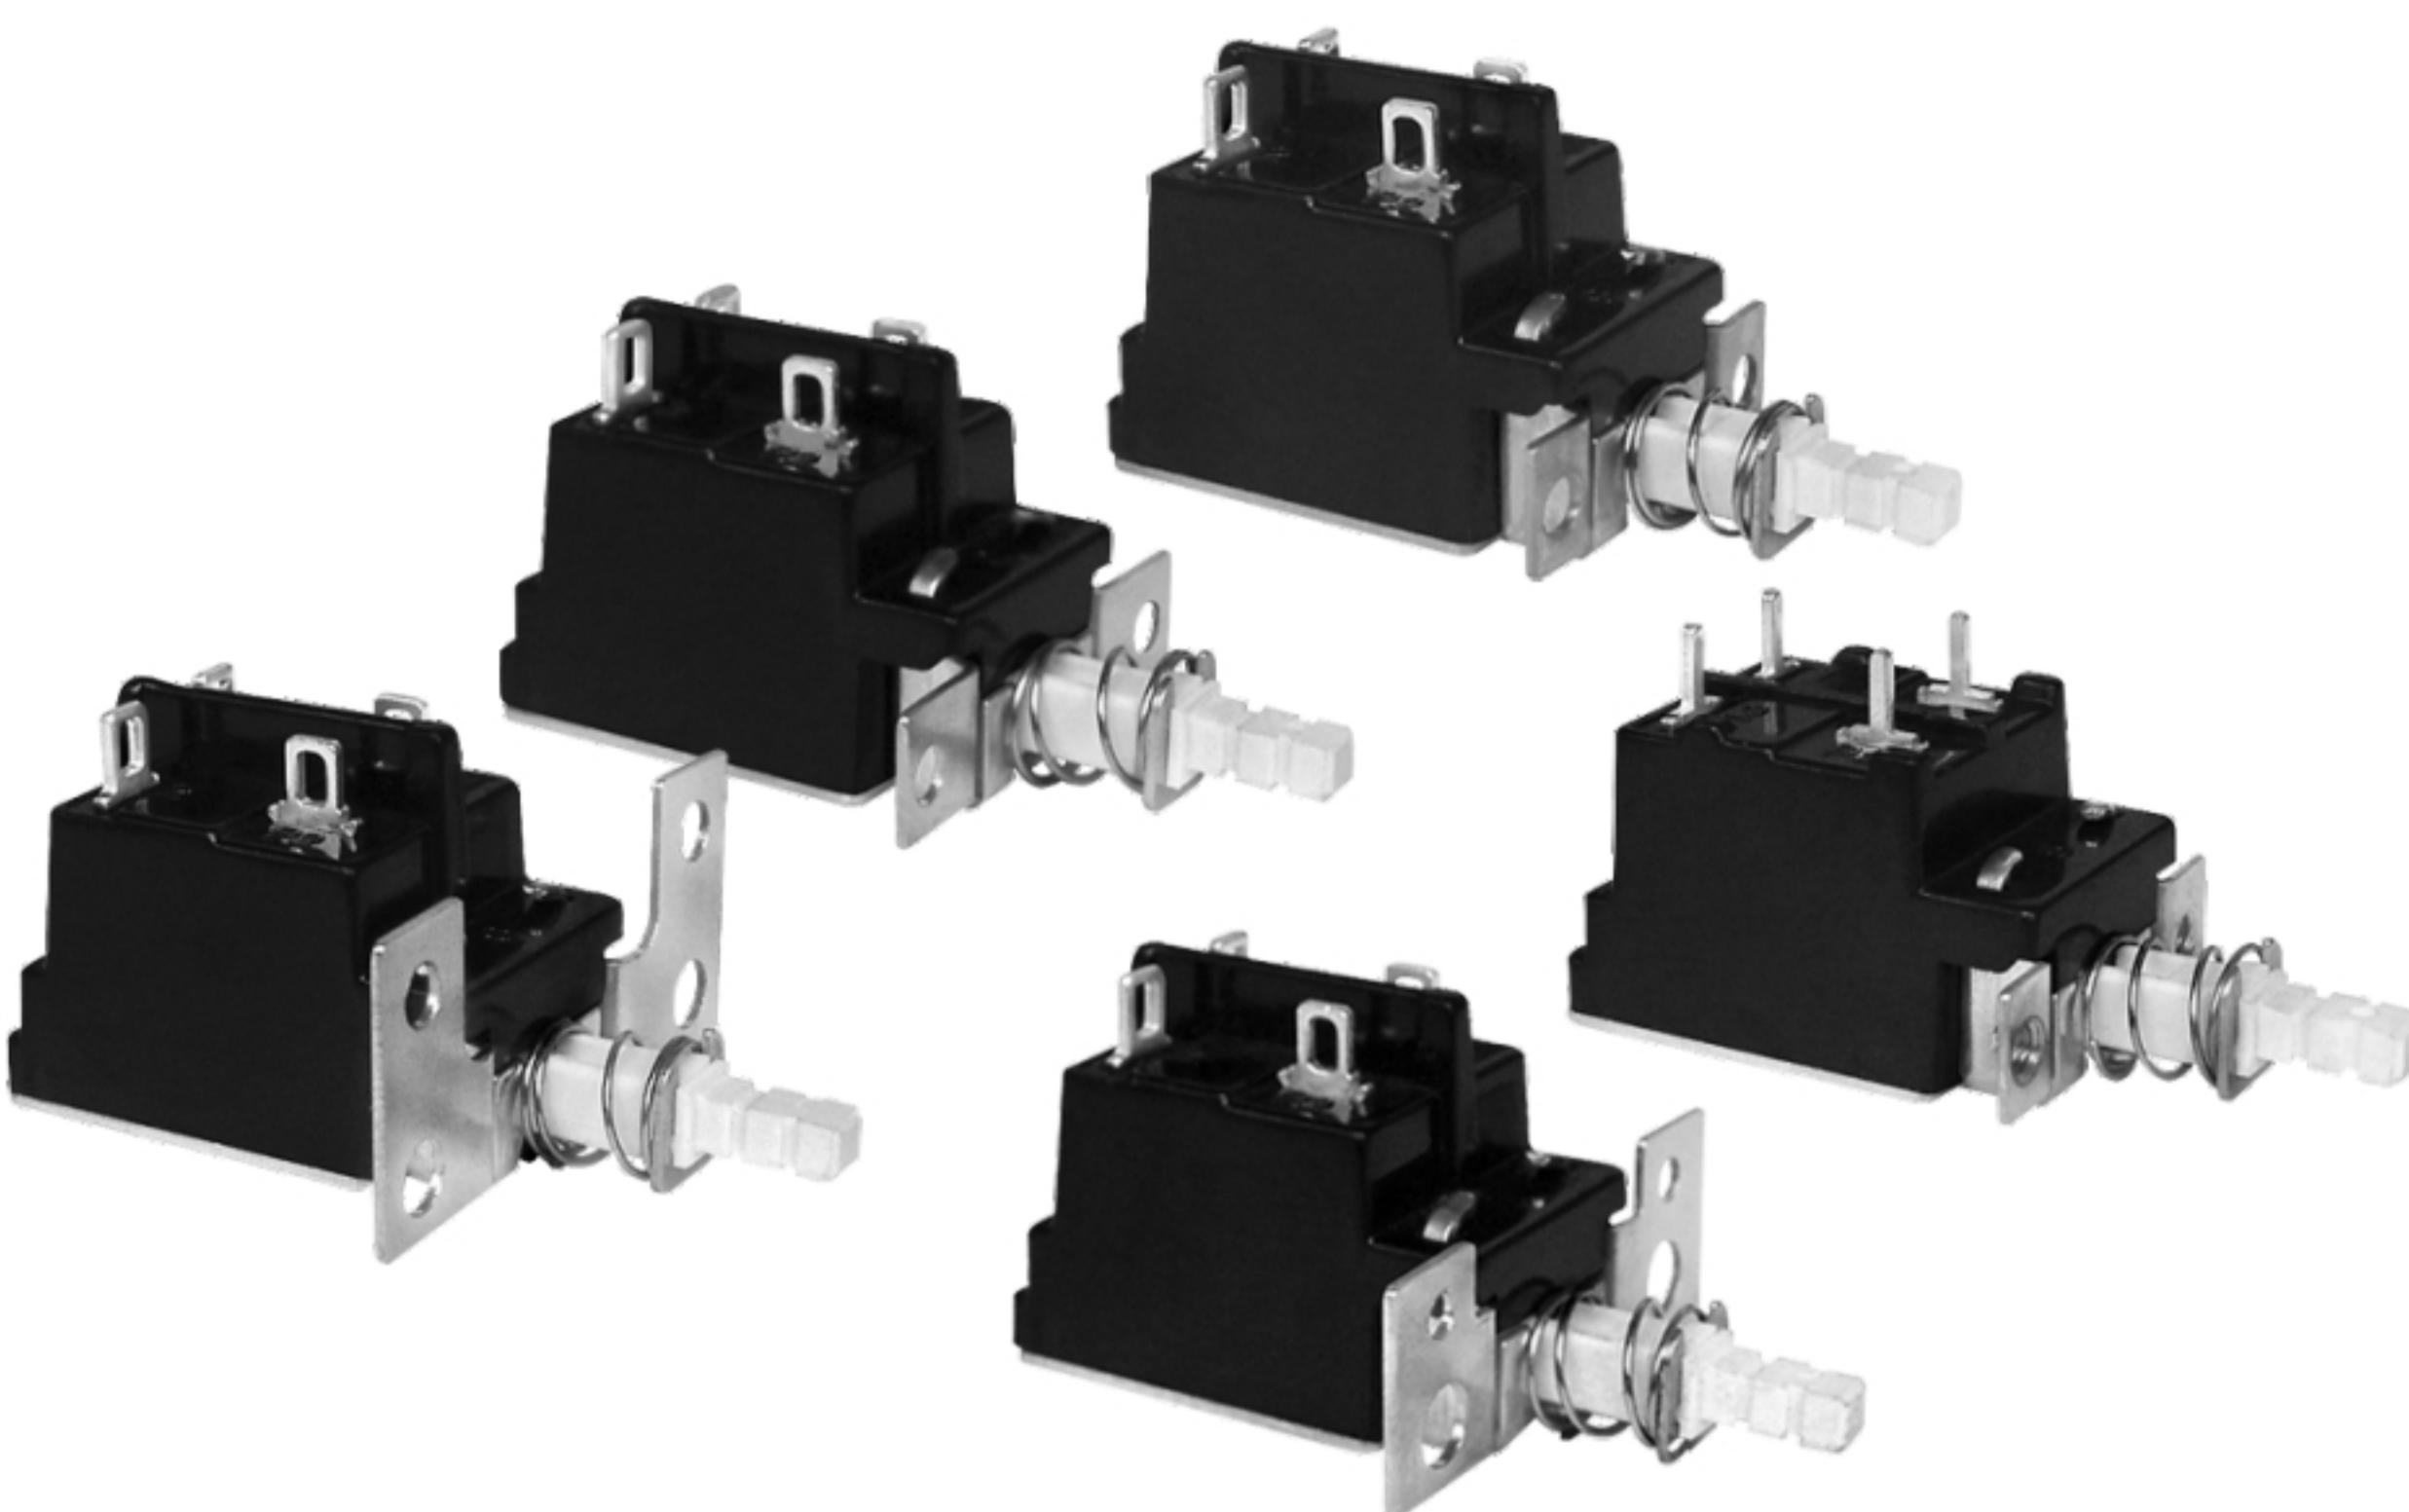




◆ 技術特性 Technical Characteristics

項目 Item	特性值 Value
環境溫度 Environment temperature	-10 ~ +85°C
相對濕度 Relative humidity	95%, 40°C
額定值 Ratings	TV-5 125VAC, 10GPA 125/250VAC, 10A 125/250VAC 5A/80A 250VAC
工作行程/全行程 Operating travel/full travel	2.5mm/3.5mm
動作力 Operating force	2 ~ 8N
電路 Circuit	雙刀單擲 DPST
絕緣電阻 Insulation resistance	≥100MΩ
接觸電阻 Contact resistance	≤50mΩ
耐電壓 Test voltage	同極不相接端子間 Between each terminals of the same polarity AC2000V 帶電金屬零件與地(外殼)之間、接線端與 不帶電金屬件之間 Between current-carrying metal parts and ground(case), and between each terminal and non-current-carrying metal parts. AC4000V
電氣壽命 Electrical life	10,000次/cycles
質量 Weight	約 16 g Approx. 16g
安全認證 Safety approvals	UL、CUL、VDE、ENE、SEMKO、DEMKO、NEMKO、FIMKO、CE、EK、CQC



DONGNAN PROVIDE YOU PROFESSIONAL MICRO SWITCH SOLUTIONS

外形和安装尺寸 Outline and mounting dimensions




KDC-A04-001

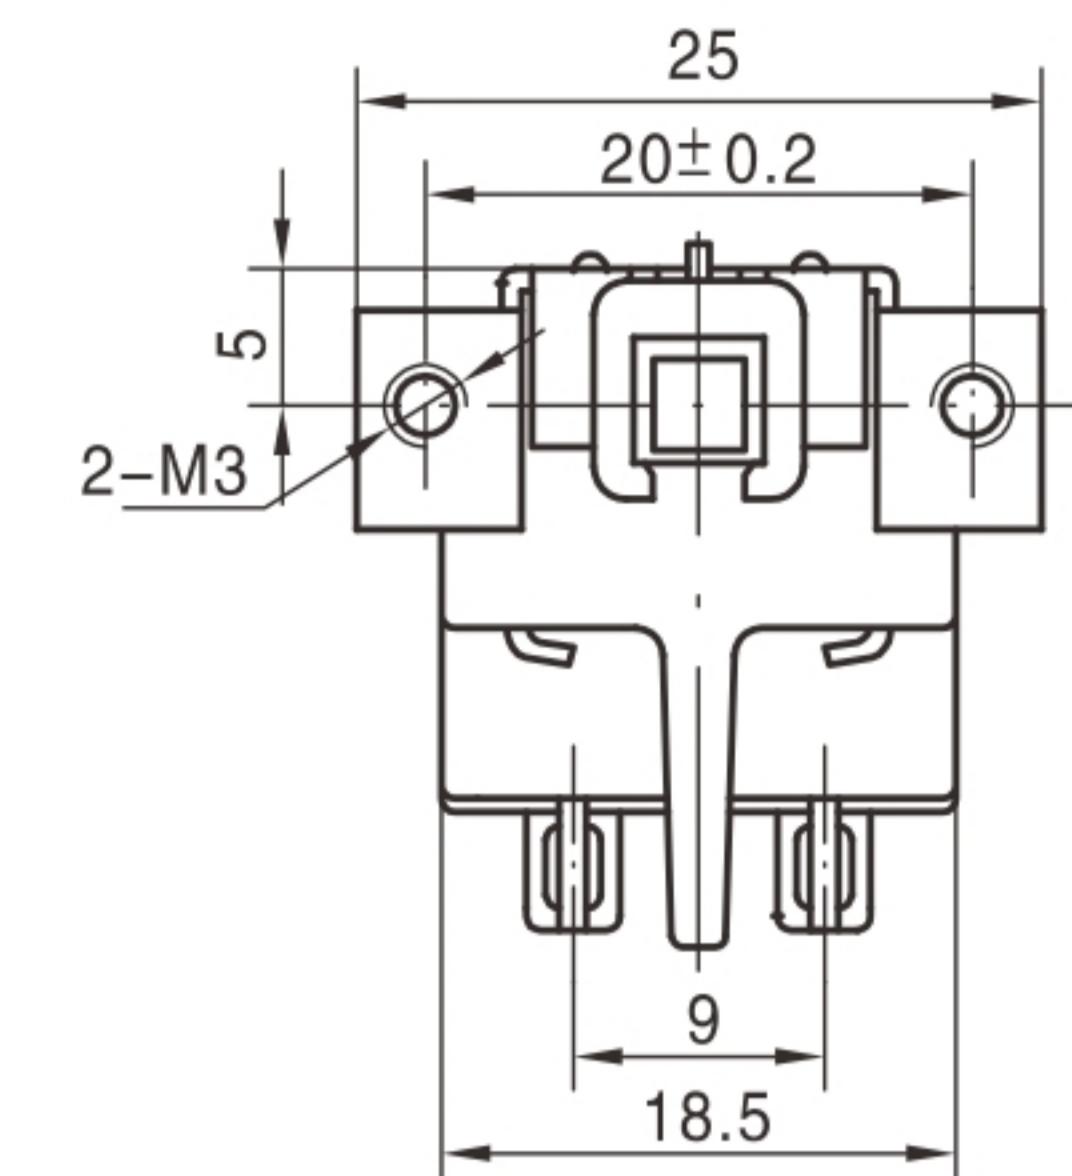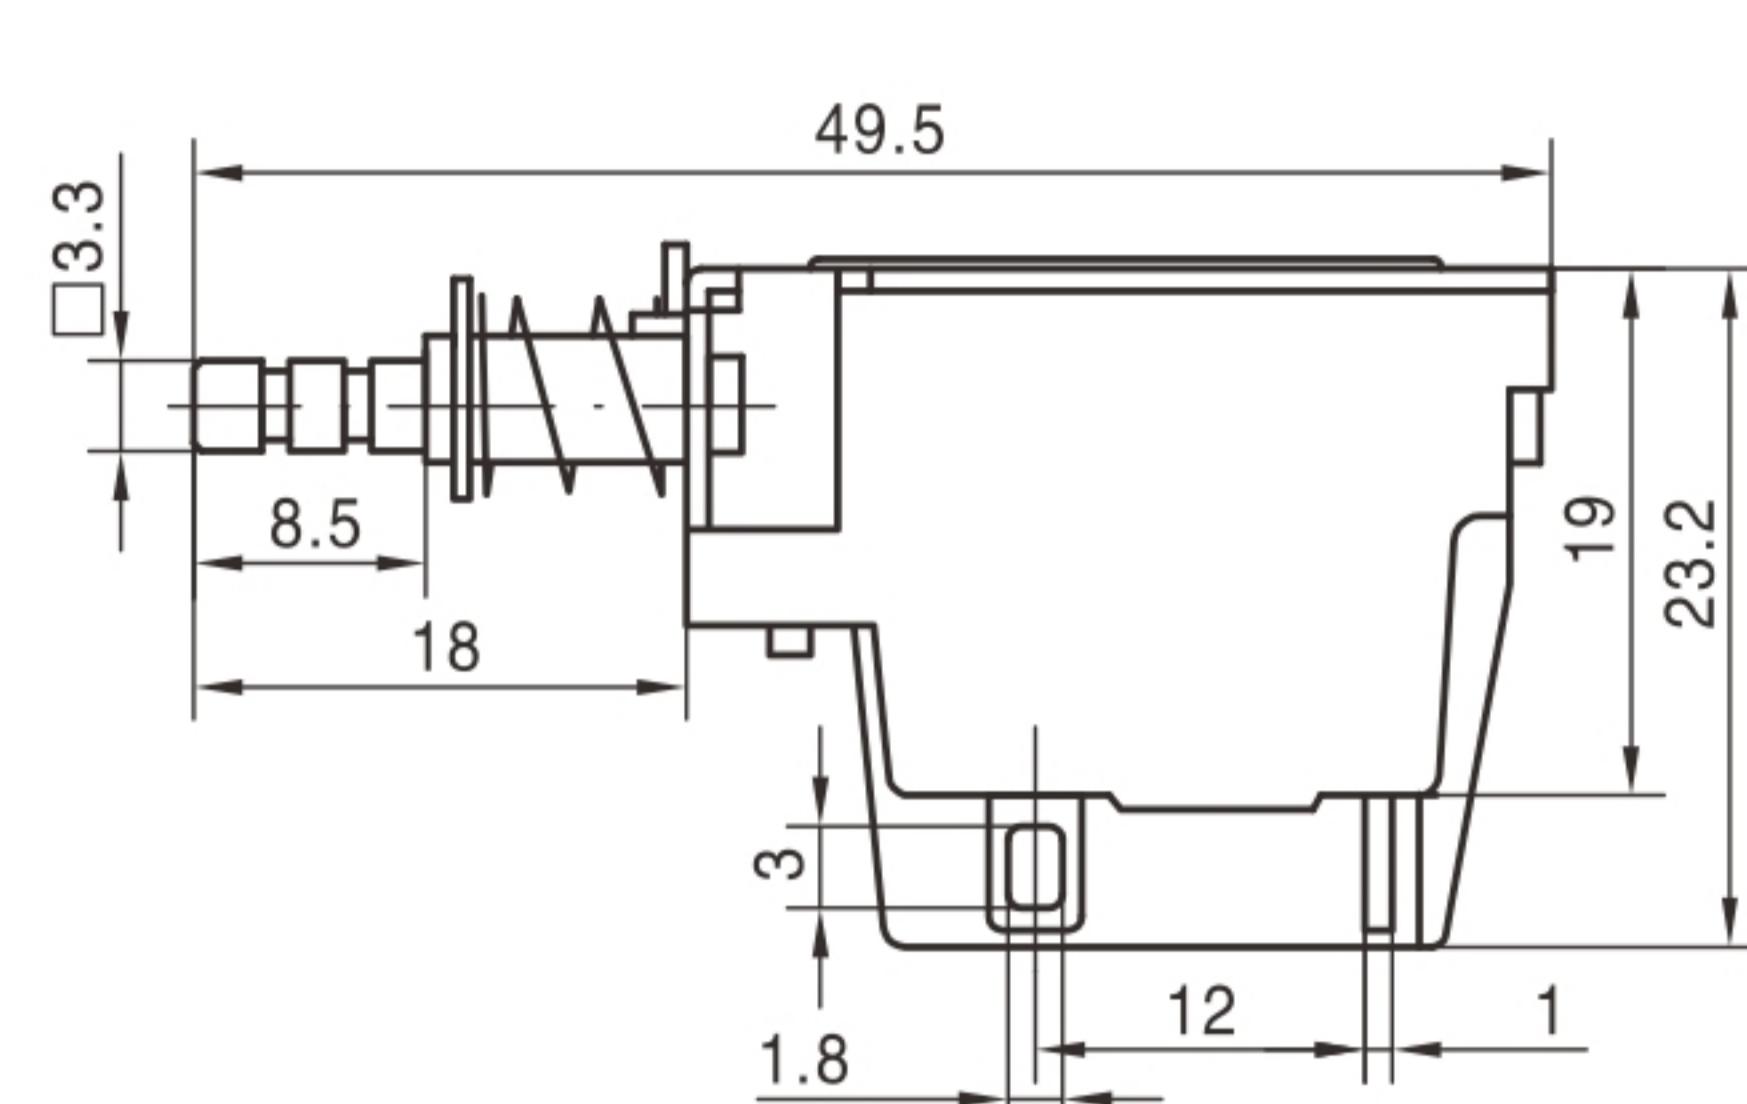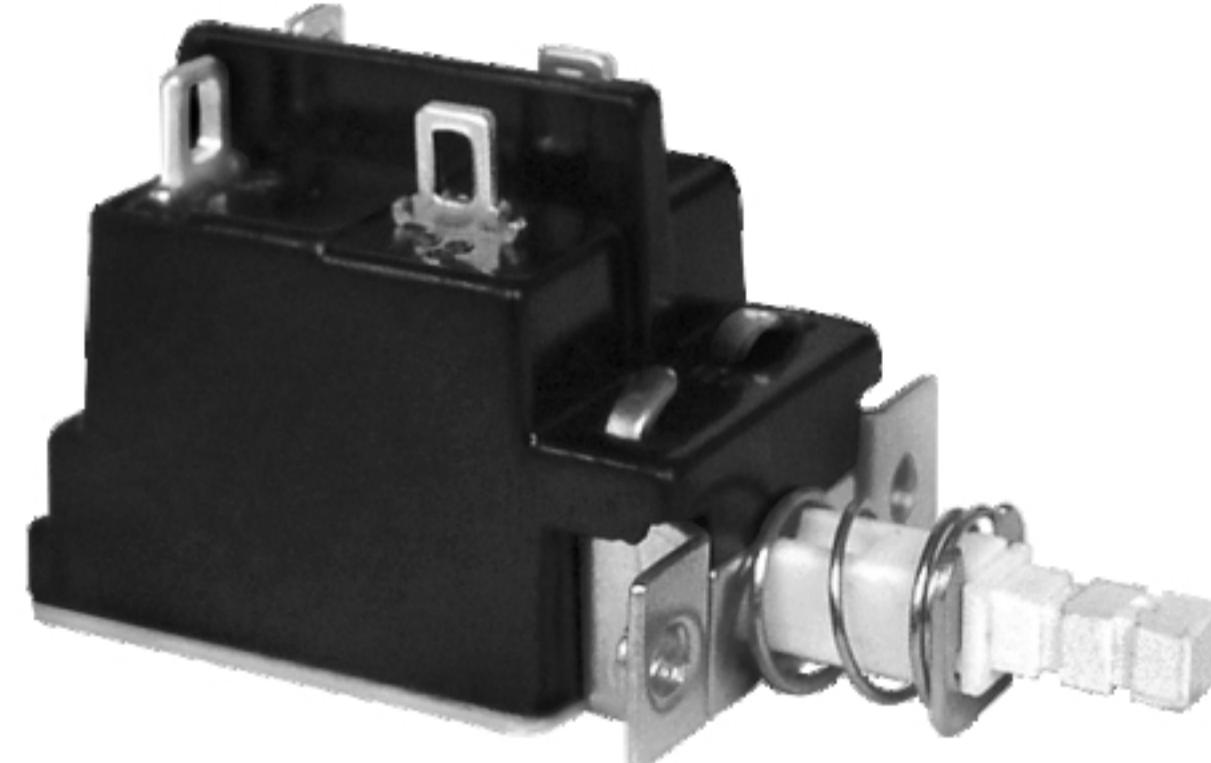




KDC-A04-002

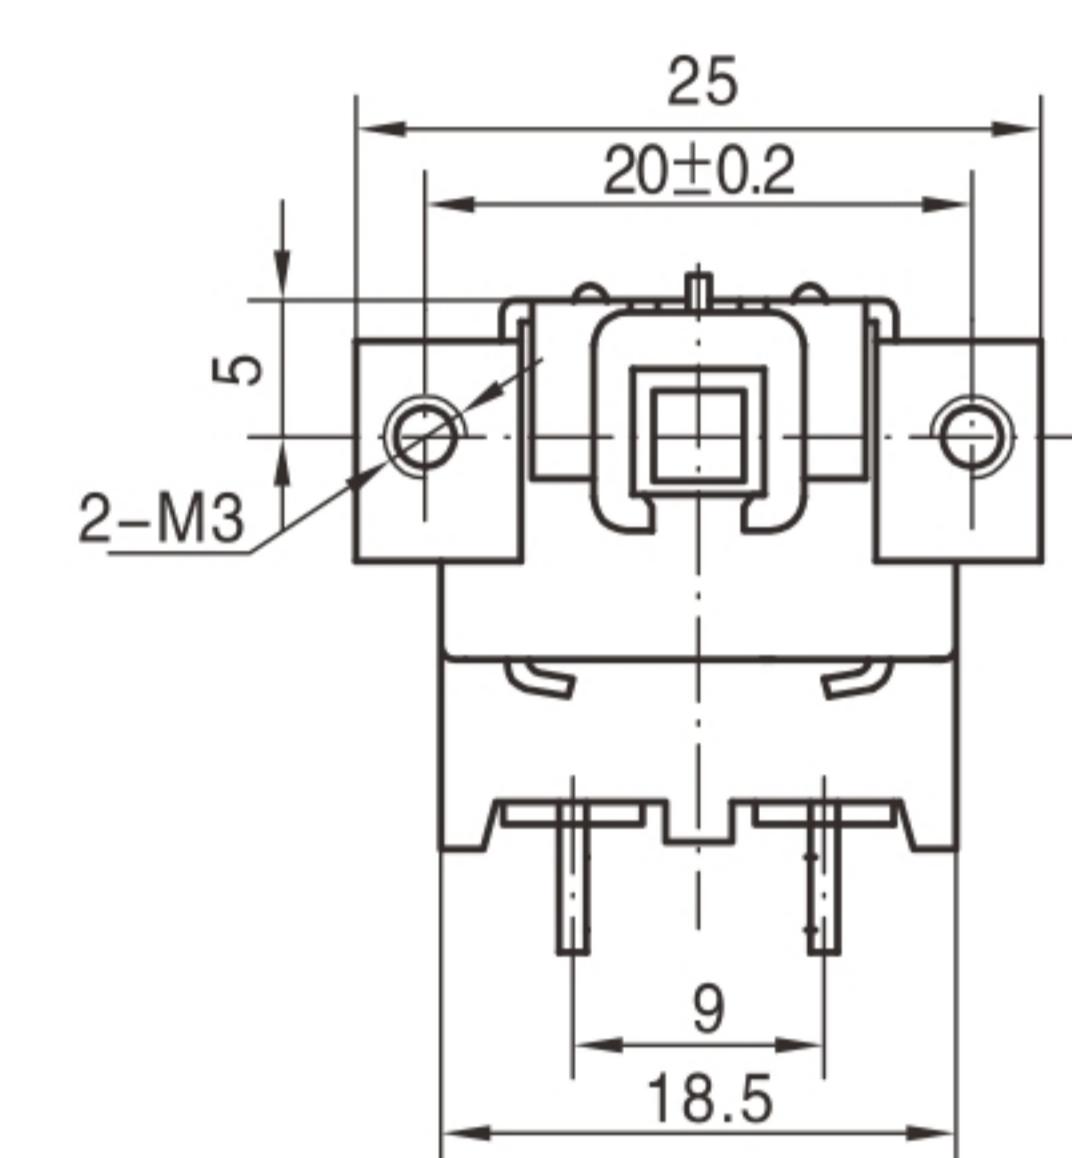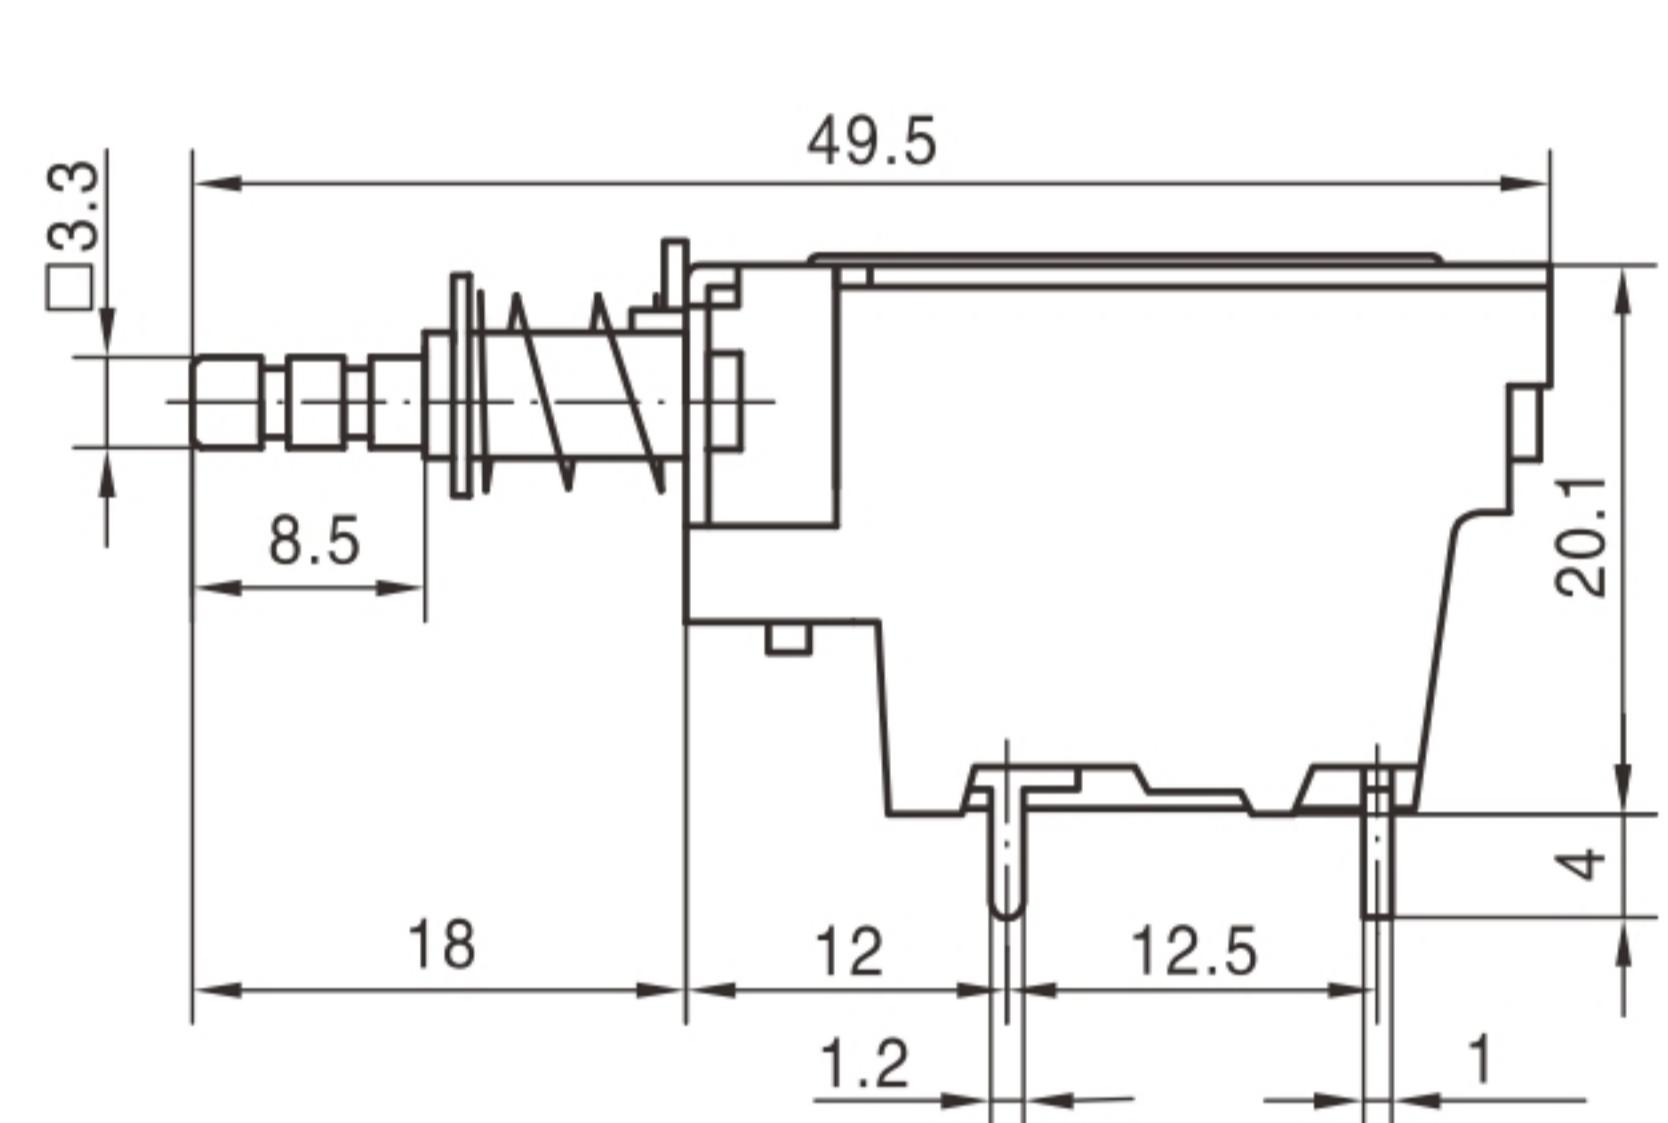




KDC-A04-004

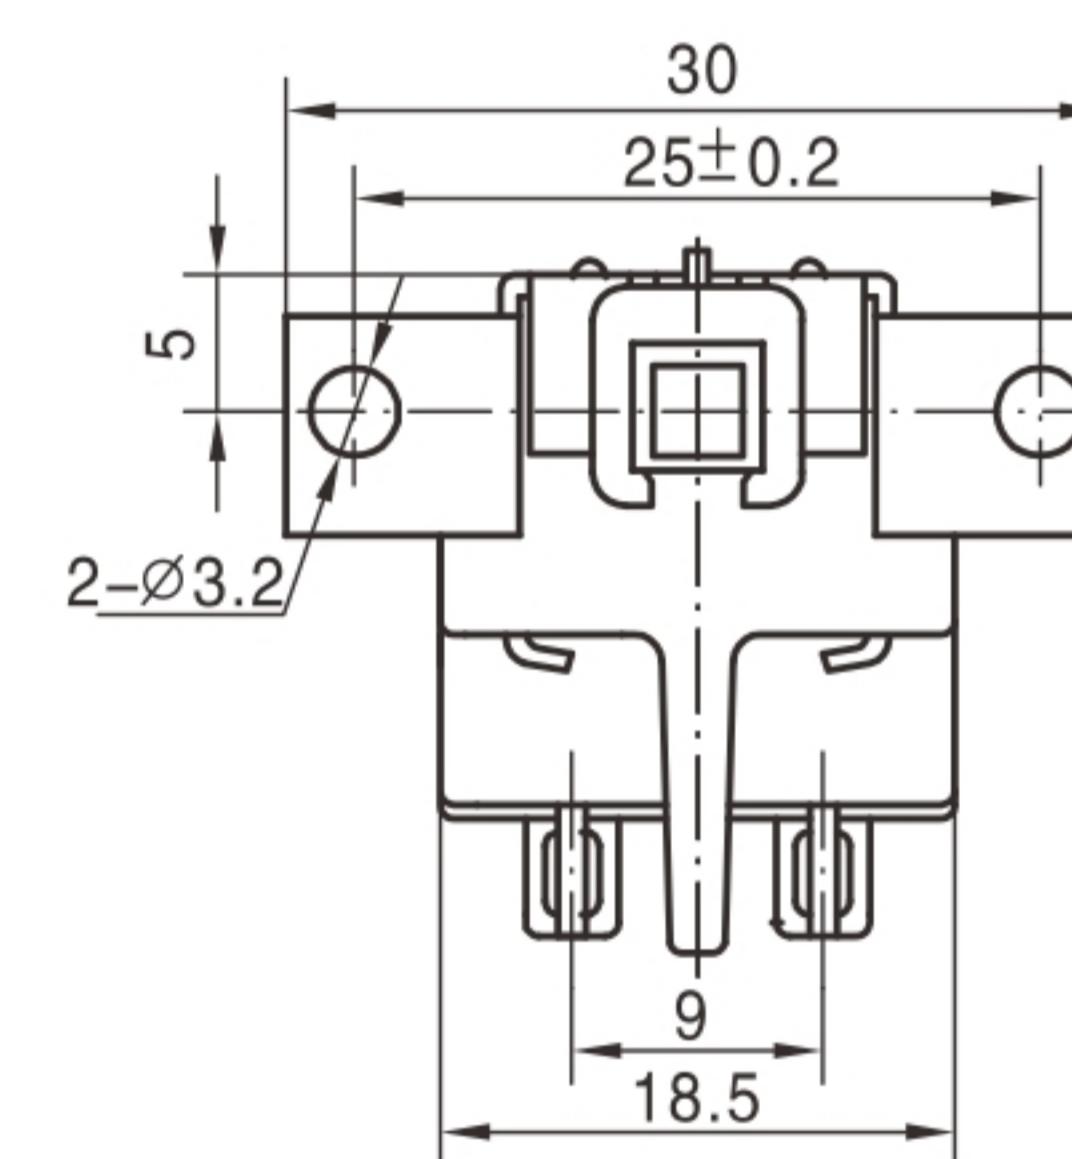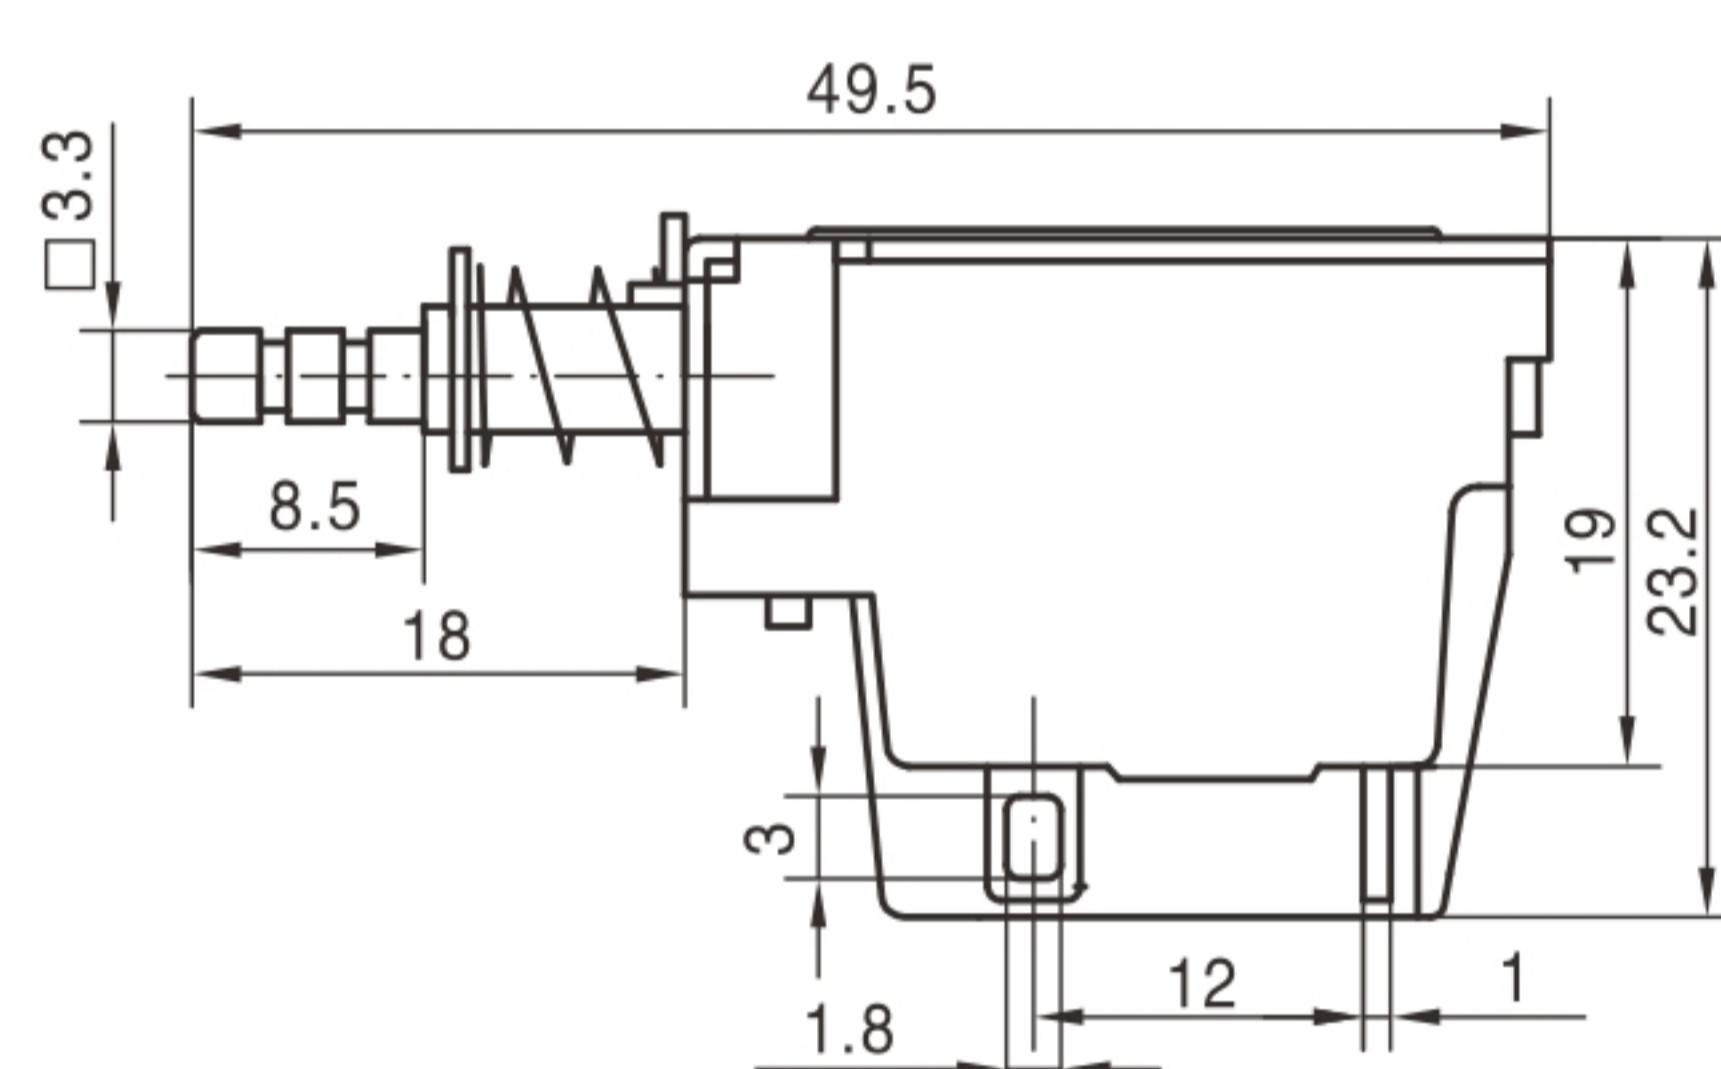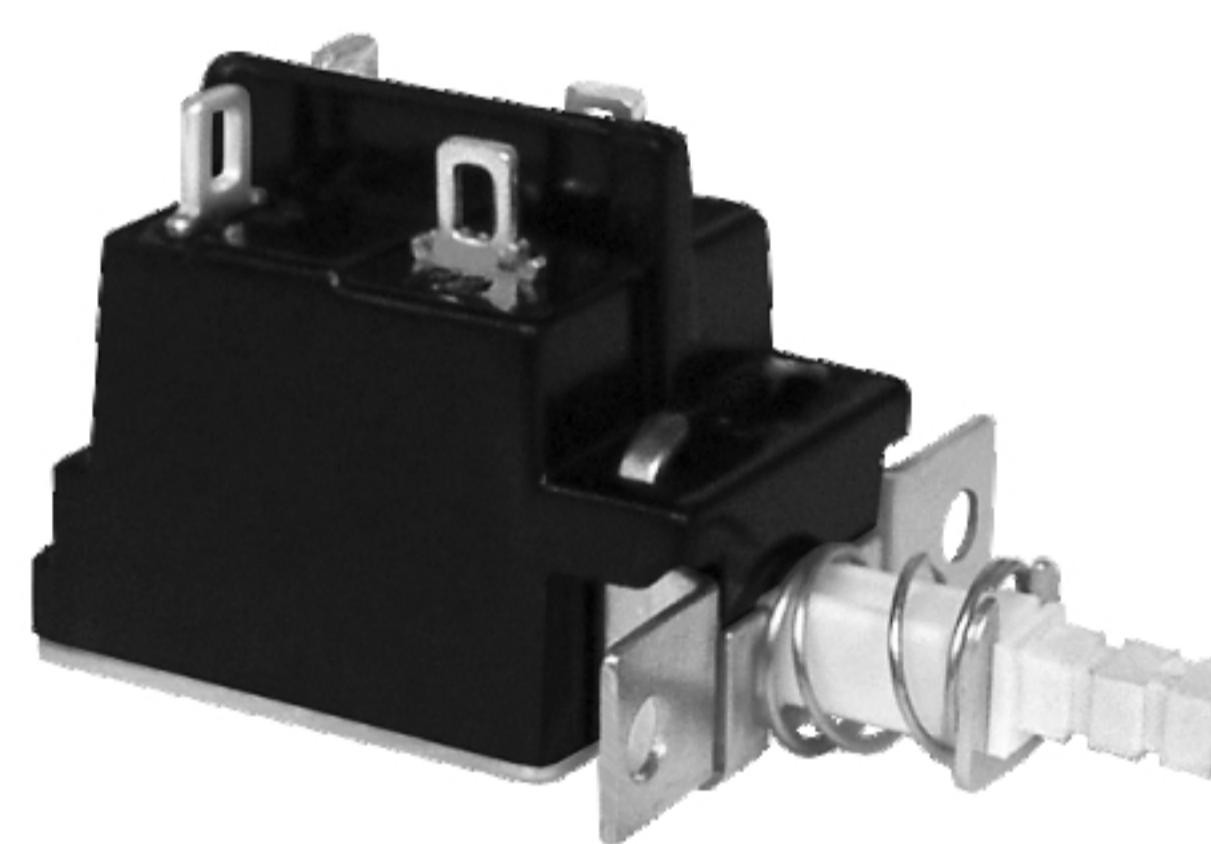

KDC-A04-007

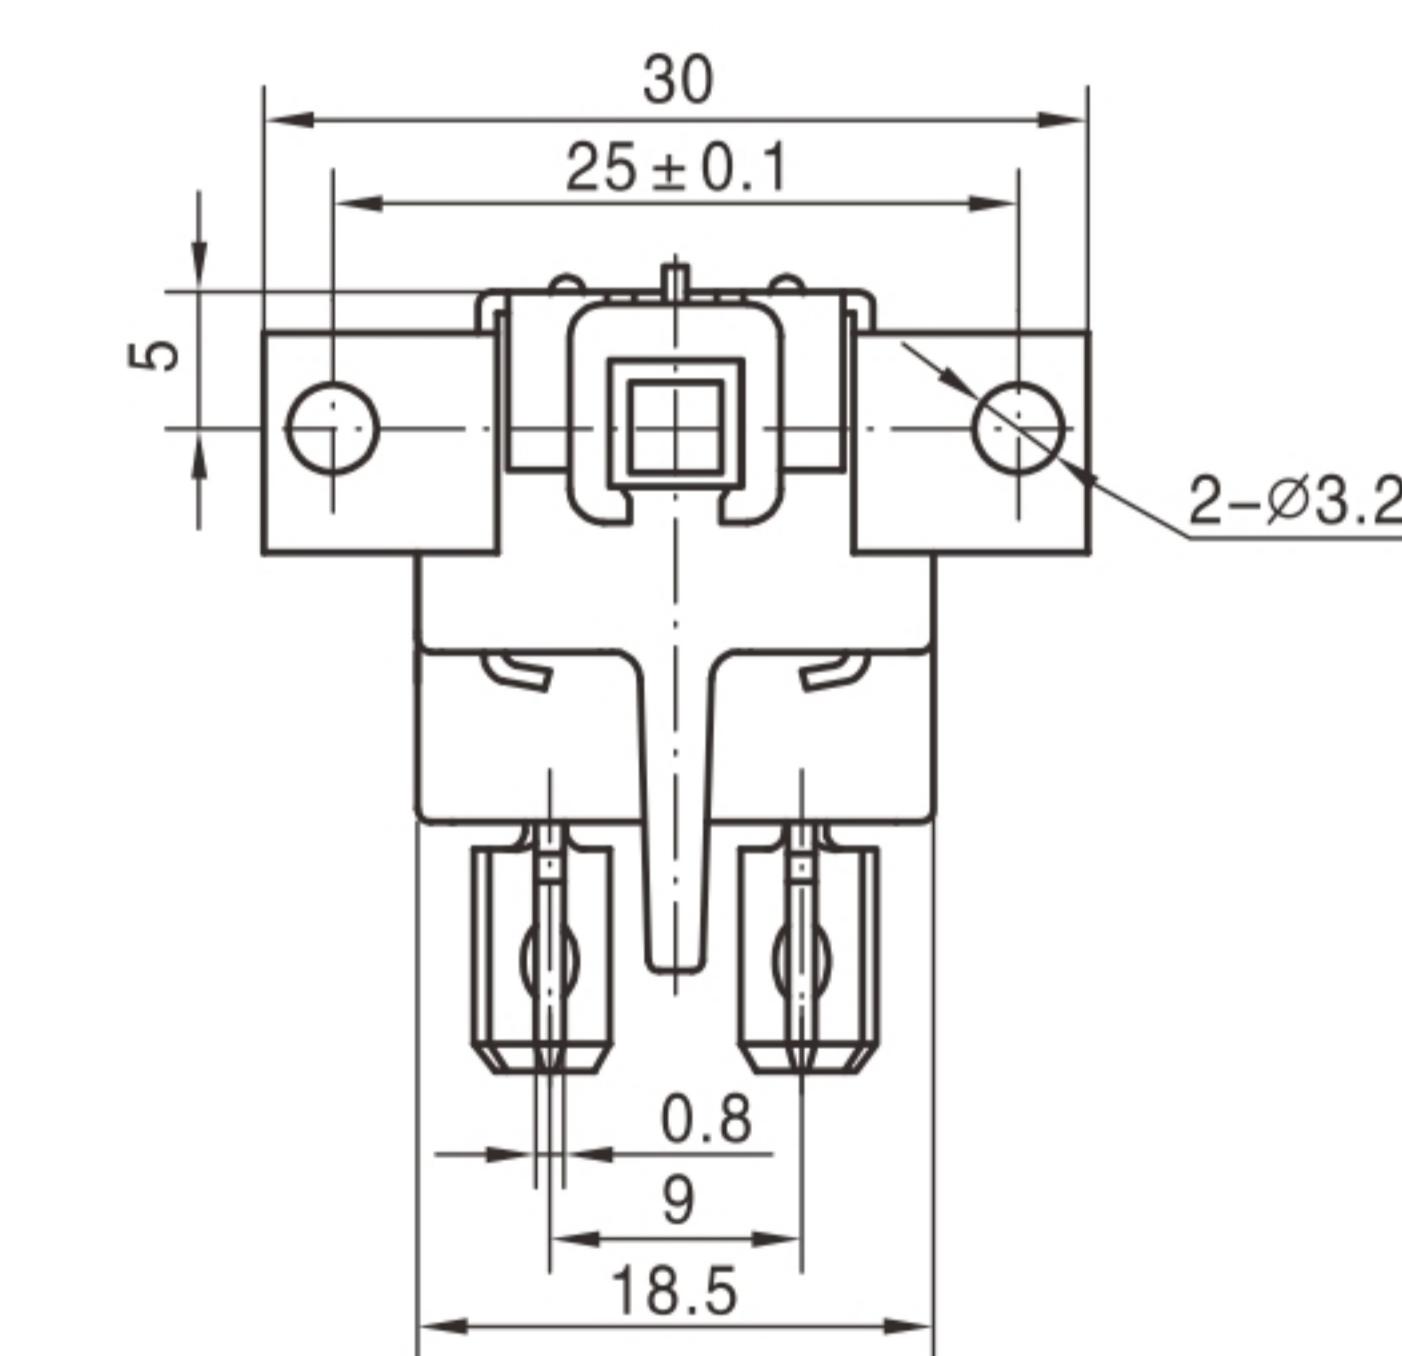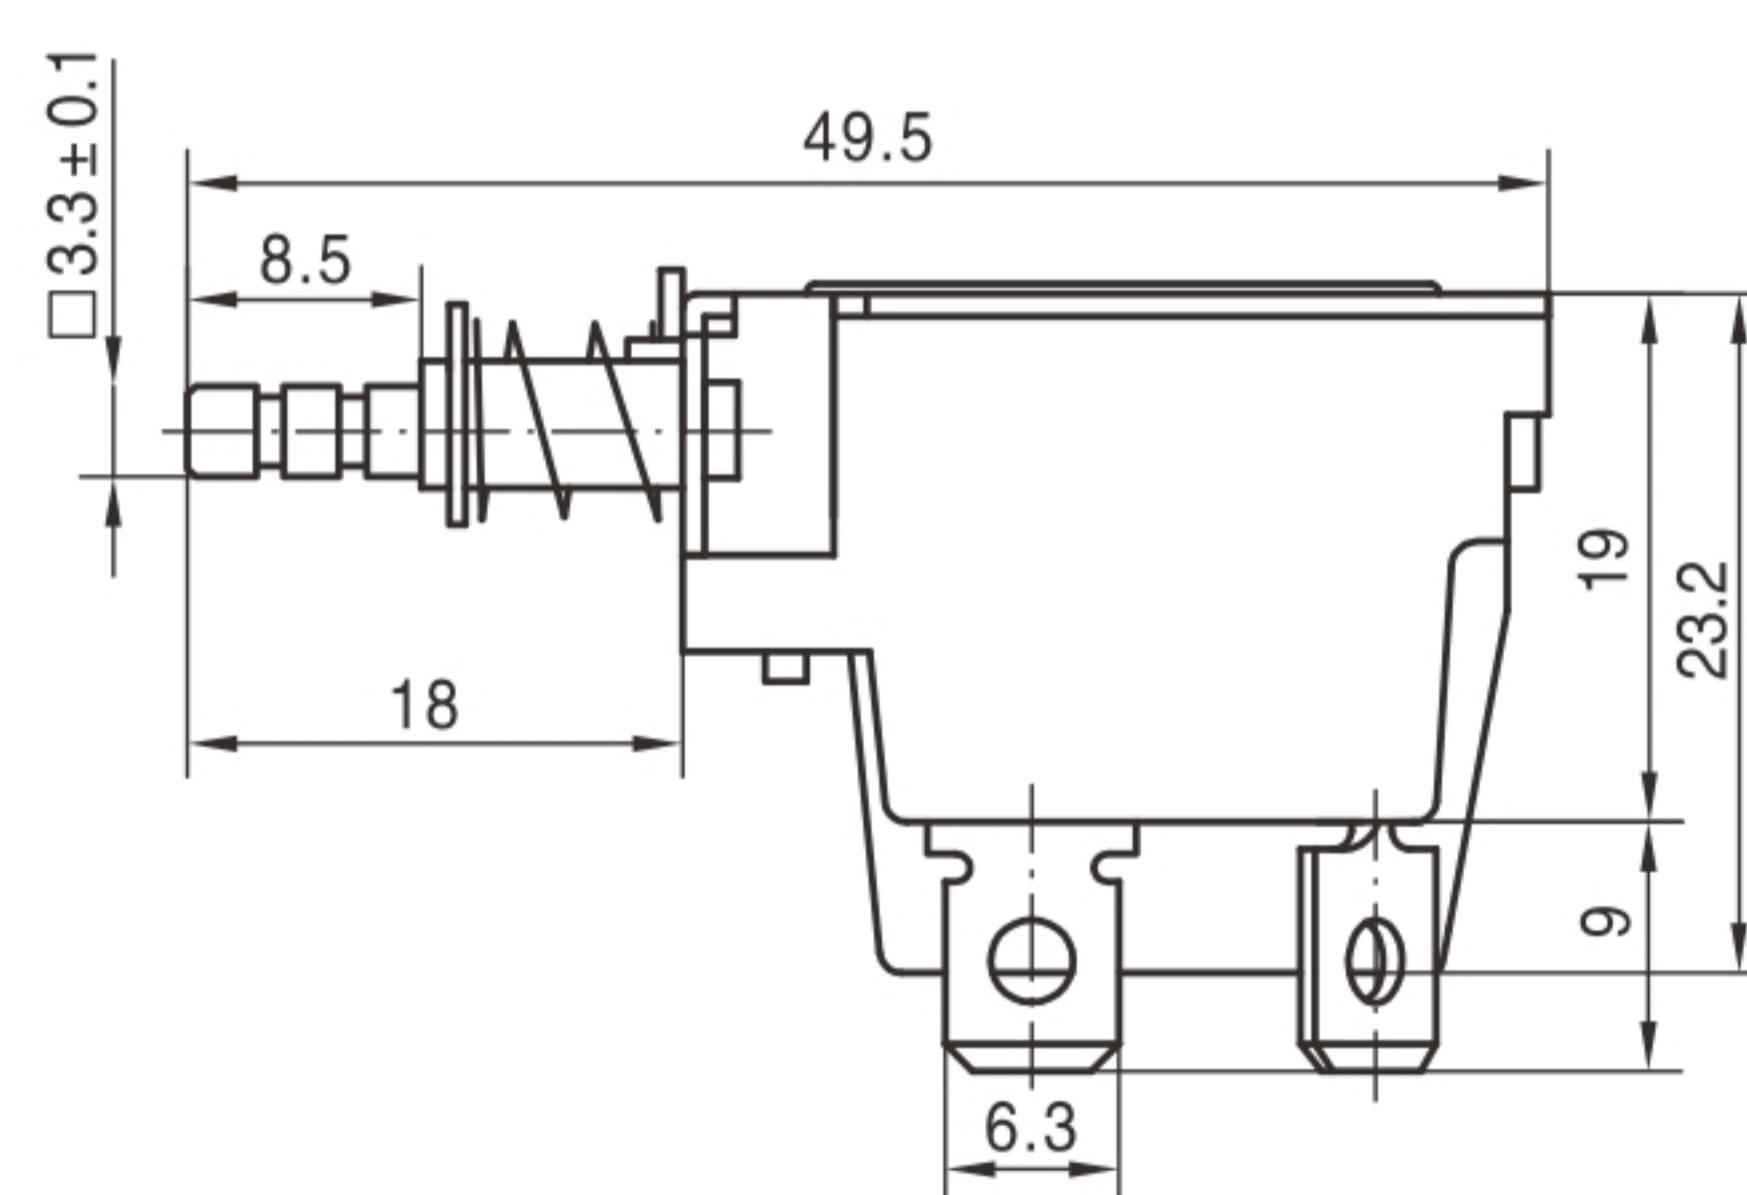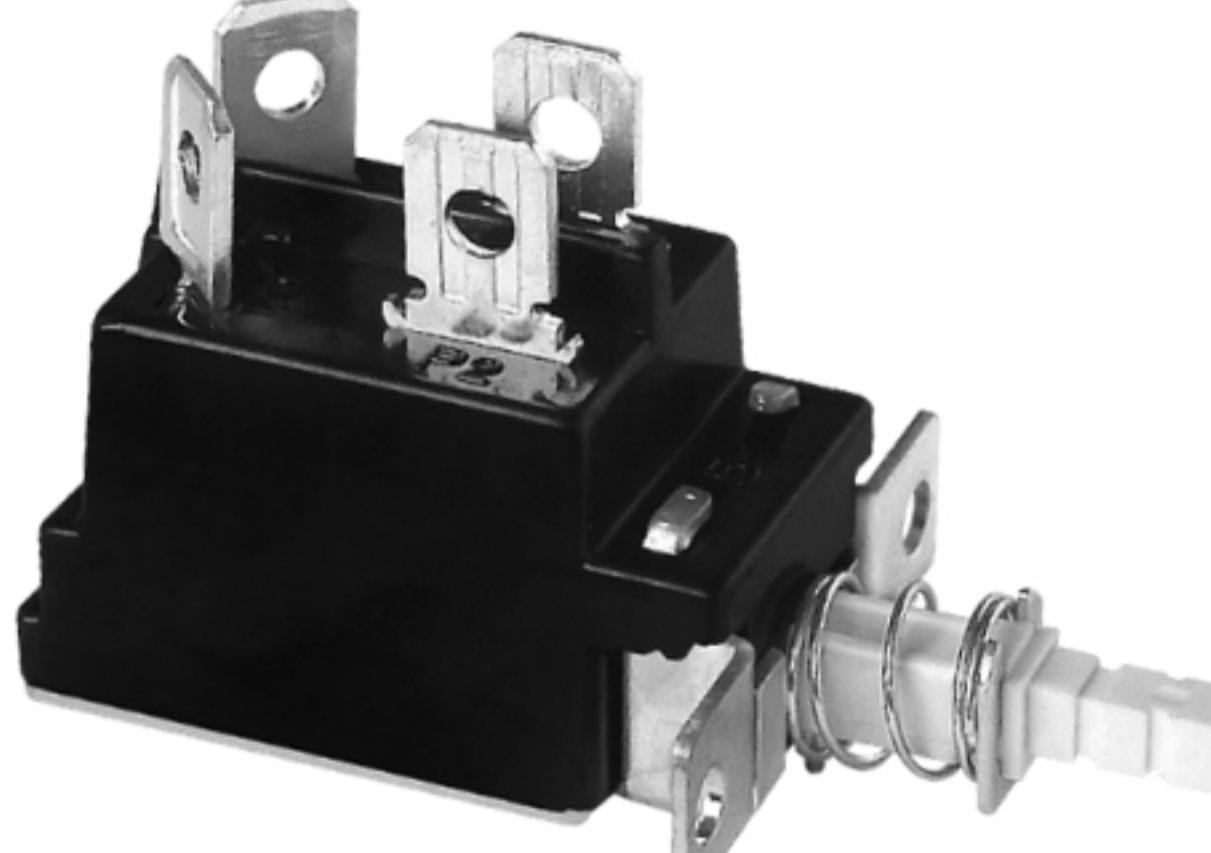

KDC-A04-006

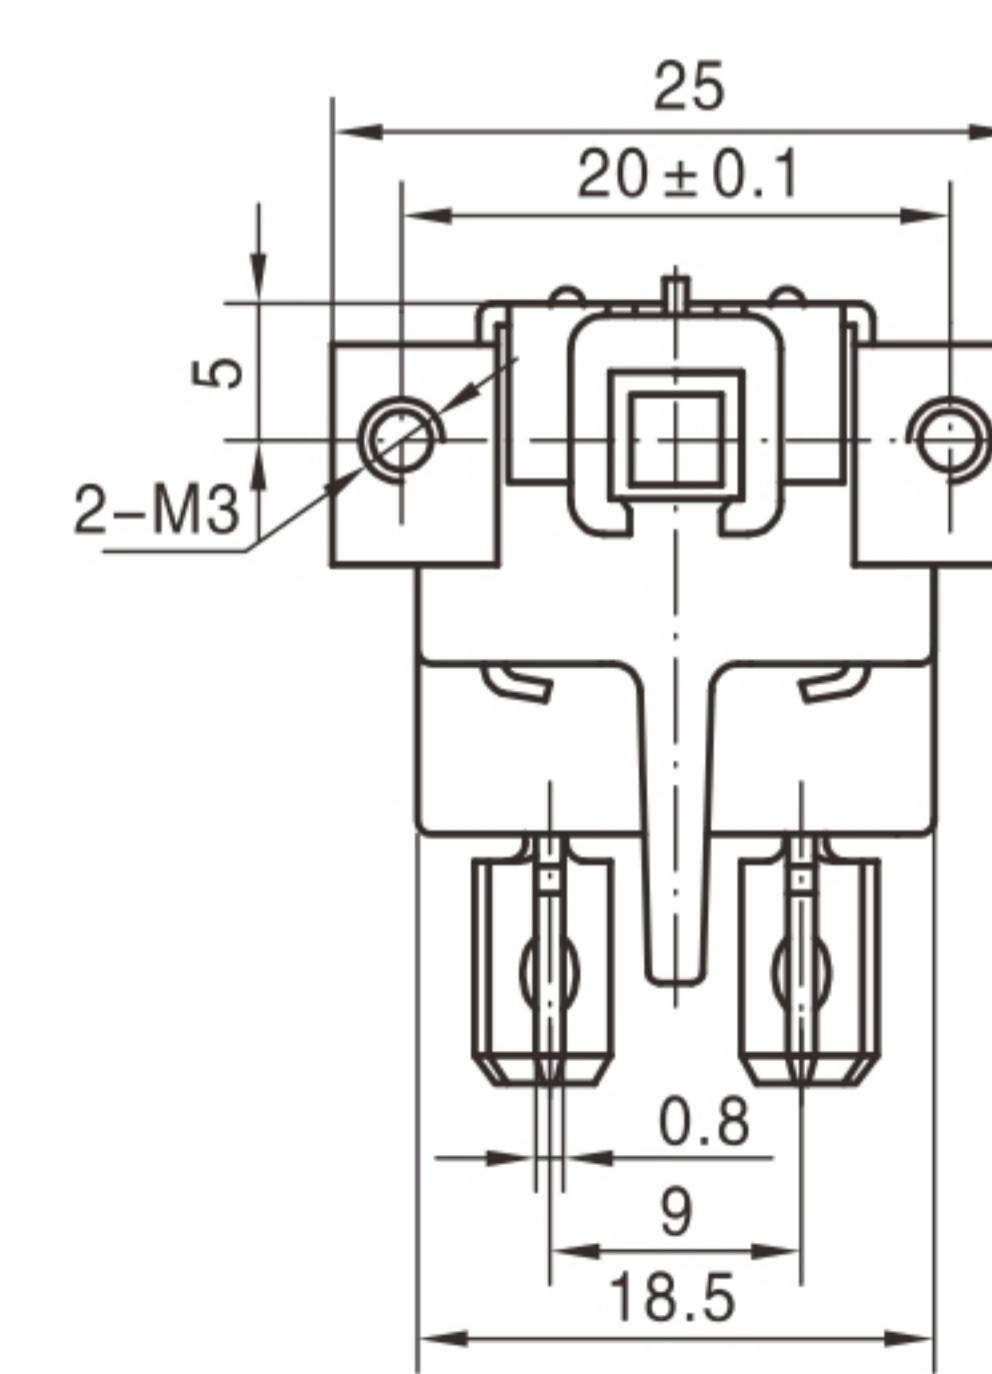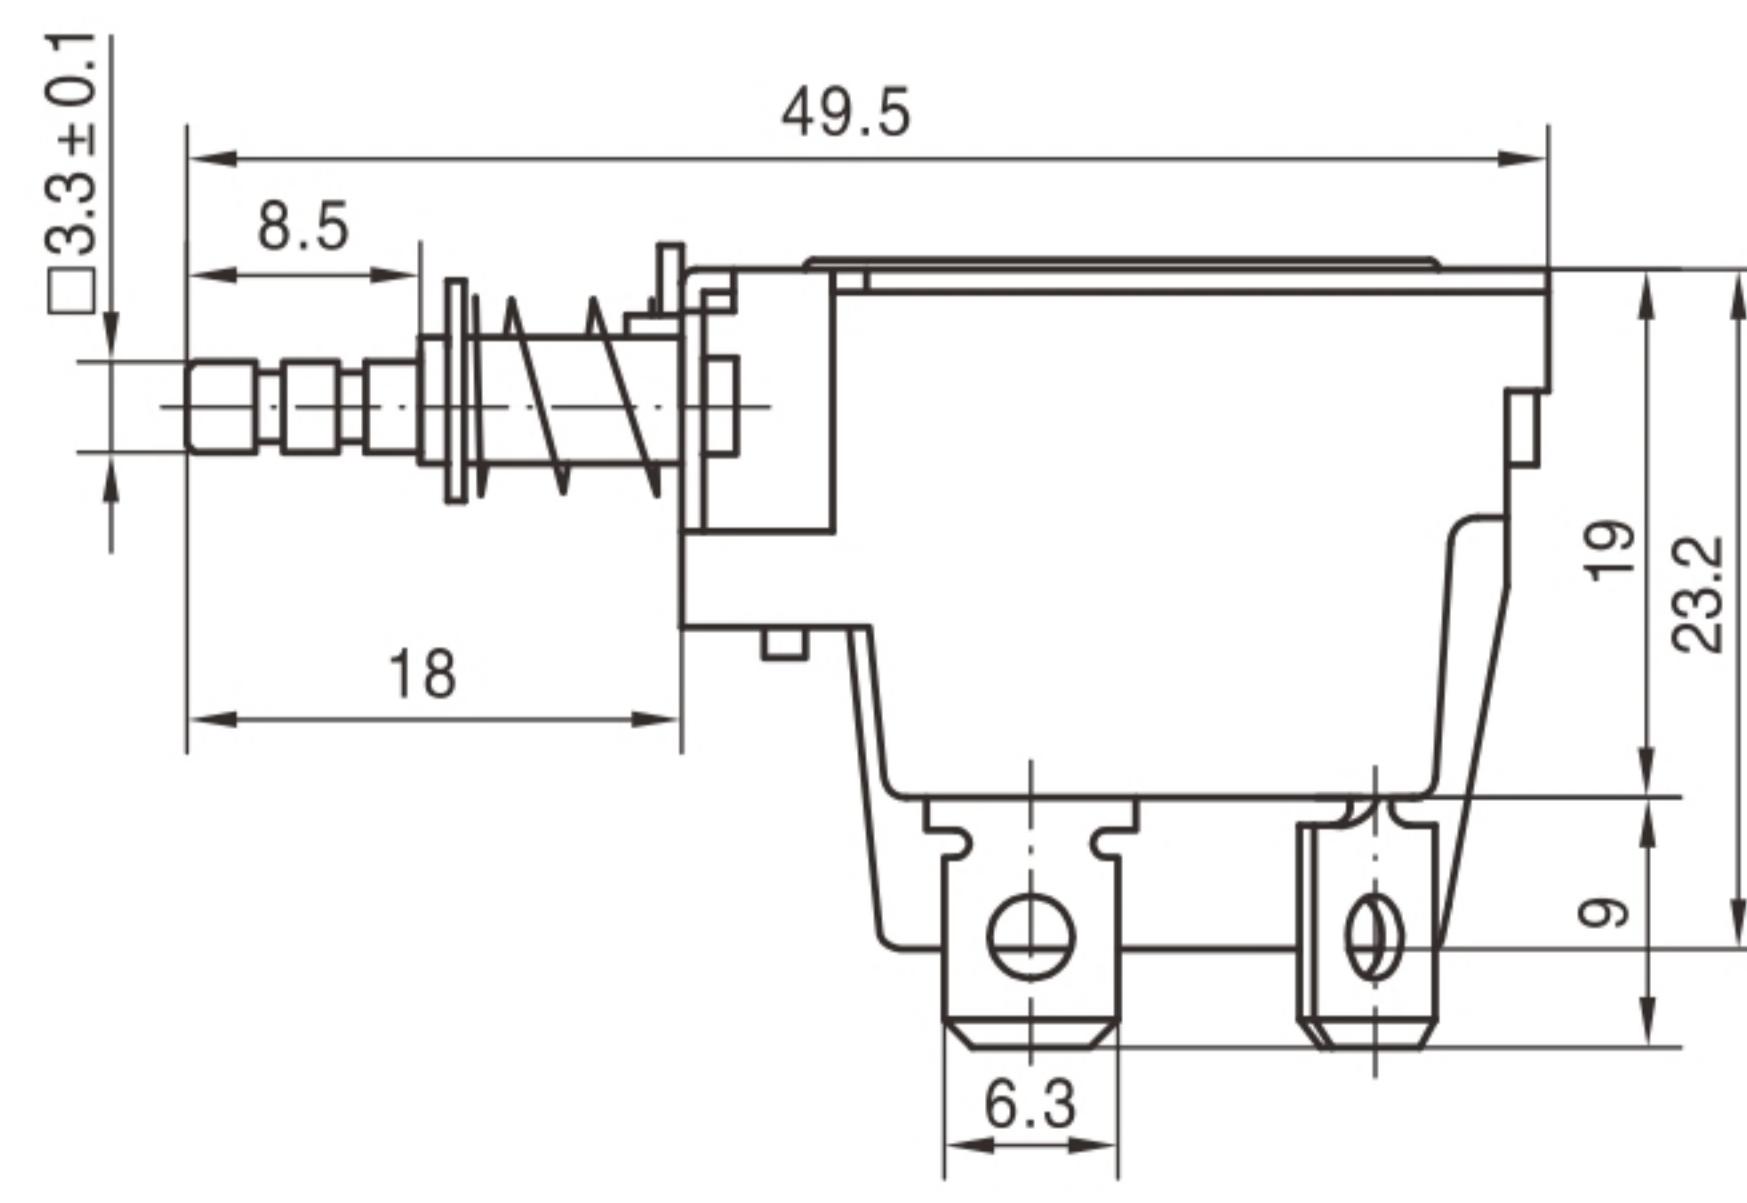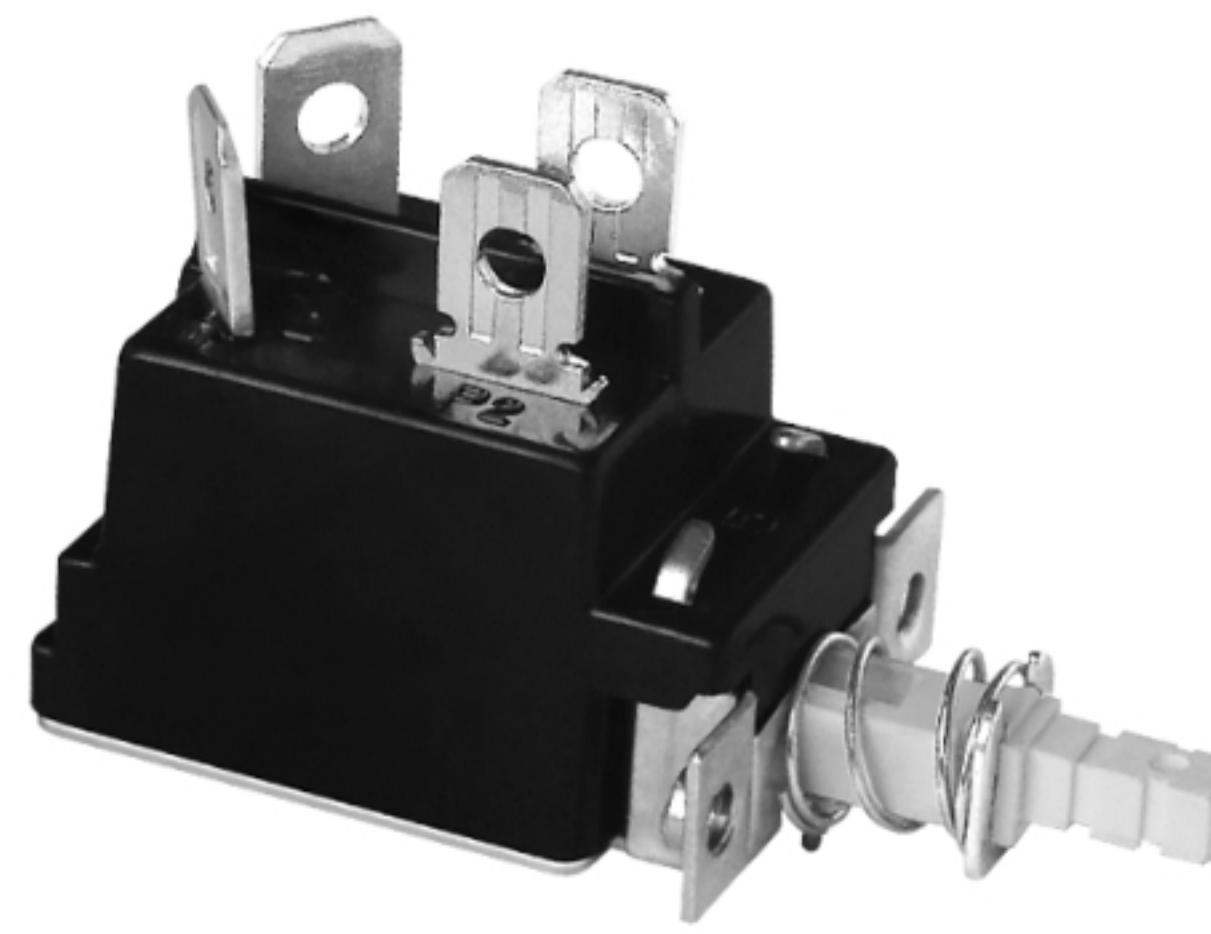

东南为您提供专业的开关解决方案

OTHER SWITCH SERIES
其他开关系列