

WX-LOK

Zhejiang Waysing Metal Products Co., Ltd

浙江伟鑫金属制品有限公司



PVC Layflat hose solution



<http://www.waysing.com>



Brief Introduction

Zhejiang Waysing Metal Products Co.,Ltd has been a leading hose couplings and fittings Manufacturer in China since 1996. With a variety of products, we service a wide range of fields including Industries、Agriculture、Oil field and terminals etc.

Through hard working during the past decades, Zhejiang Waysing Metal Products Co.,Ltd can supply different kinds of products to meet customer's requirements in order to supply hose and fittings for Water Solution.

The series products as below:

PVC Layflat hose

Crimp Sleeve & Ferrule

Camlock coupling 、 Pinlug & Bauer、 King nipple

Strainer

PVC Suction hose

PVC Layflat Hose/Standard

Name: PVC Layflat Hose Standard
Cover: As required
Temperature: -5°F To 150°F
Packaging: Cut and coupled to length
Couplings: Camlock Coupler, Pinlug, Steel Bauer, King nipple



Features:

Choosing high strength cotton yard and high quality pvc to be light in weight and flexible with good cold or hot resistance high working pressure ,which is ideal tool for water discharge in agriulture and building.

Part NO.	Size	ID	Wall Thickness			Weight		
			mm			Kg/100m		
W.P	Inch	mm	2Bar	3Bar	4Bar	2Bar	3Bar	4Bar
PVCDH100	1	25	1.1	1.3	1.5	15	16	17
PVCDH125	1-1/4	32	1.1	1.3	1.5	17	20	21
PVCDH150	1-1/2	38	1.1	1.3	1.5	19	23	25
PVCDH200	2	51	1.1	1.3	1.6	25	32	35
PVCDH250	2-1/2	65	1.1	1.3	1.6	32	40	48
PVCDH300	3	76	1.1	1.4	1.6	38	50	58
PVCDH400	4	102	1.2	1.4	1.7	52	65	75
PVCDH500	5	125	1.3	1.4	1.7	75	85	100
PVCDH600	6	150	1.3	1.6	1.7	95	105	115
PVCDH800	8	202	1.4	1.6	1.9	160	180	190
PVCDH1000	10	250	/	2.3	2.6	/	250	275
PVCDH1200	12	300	/	2.6	2.7	/	360	400

PVC Layflat Hose/Medium Duty

Name: PVC Layflat Hose/Medium Duty
Cover: As required
Temperature: -10°F To 150°F
Packaging: Cut and coupled to length
Couplings: Camlock Coupler, Pinlug, Steel Bauer, King nipple



Features:

Choosing high strength polyester filament and high quality pvc it is successively winded,parted the threads regularly and molded by plastic coated once.with an attractive appearance,soft surface and light weight
 high burst pressure and long service life
 the products is acid and alkali resistant
 aging resistant,stretching resistant,anti-wrinkle
 non-toxic,flavorless and enviromental protection.

Part NO.	Size	ID	Thickness	W.P	B.P	Weight
	Inch	mm	mm	Bar	Bar	Kg/100m
PVCMH100	1	25	1.2	4	14	17
PVCMH125	1-1/4	32	1.2	4	14	19
PVCMH150	1-1/2	38	1.2	4	14	23
PVCMH200	2	51	1.1	4	14	25
PVCMH250	2-1/2	65	1.2	4	13	32
PVCMH300	3	76	1.2	4	13	38
PVCMH400	4	102	1.2	4	12	55
PVCMH500	5	125	1.3	4	12	80
PVCMH600	6	150	1.3	4	12	90
PVCMH800	8	202	2.6	4	12	200

PVC Layflat Hose/Heavy Duty

Name: PVC Layflat Hose/Heavy Duty
Cover: As required
Temperature: -10°F To 150°F
Packaging: Cut and coupled to length
Couplings: Camlock Coupler, Pinlug, Steel Bauer, King nipple



Features:

Choosing high strength polyester filament and high quality pvc, it is successively winded parted the threads regularly and molded by plastic coated once.with an attractive appearance, soft surface and light weighjthigh burst pressure and long service life The Heavy duty Sunnyhose is well suited for water drainage at open pit mining and at civil engineering/dam construction sites in mountains or other areas where water must be moved to significantly higher or lower elevations

Part NO.	Size	ID mm	Thickness		Weight	
	Inch		mm		KG/100m	
W.P			8Bar	10Bar	8Bar	10Bar
PVCHH100	1	25	1.5	1.7	19	21
PVCHH125	1-1/4	32	1.4	1.5	21	23
PVCHH150	1-1/2	38	1.5	1.9	25	29
PVCHH200	2	51	1.5	2	35	42
PVCHH250	2-1/2	65	1.8	2.1	48	54
PVCHH300	3	76	2.2	2.5	65	85
PVCHH400	4	102	2.4	2.6	95	100
PVCHH500	5	125	2.5	/	120	/
PVCHH600	6	150	3.1	/	210	/
PVCHH800	8	202	3.1	/	280	/

PVC Suction Hose

Name: PVC Suction Hose
Cover: As required
Temperature: -5°F To 65°F
Packaging: Cut and coupled to length
Couplings: Camlock Coupler, Pinlug



Features:

- Rigid PVC spiral reinforced between walls.**
- Offers superme durability with lower cast than rubber**
- Excellent substitute for rubber hose in most applications**
- Resists kining,cracking,rotting,hardening Excellent resistance to pressure,External impacts,chemicals,gases,light acids and saline water**

Part NO.	Size Inch	ID mm	Wall Thickness		Weight/Roll		Thickness	
			Bar		32M/Roll	30.5M/Roll	mm	
W. P			Corrugated	Smooth	Corrugated	Smooth	Corrugated	Smooth
PVCSH100	1	25	8	9	10	11.3	3.5	3.8
PVCSH125	1-1/4	33	8	9	14	15	4	4.2
PVCSH150	1-1/2	40	8	9	16	17.7	4	4.3
PVCSH200	2	53	7	8	23	27	4.3	4.5
PVCSH250	2-1/2	65	6	7	32	36	4.5	4.7
PVCSH300	3	76	5	6	38	45.4	5	5.2
PVCSH400	4	102	5	6	70	72.6	5.5	5.7
PVCSH500	5	125	4	5	102	115	5.7	6
PVCSH600	6	152	4	5	138	145	7	7
PVCSH800	8	204	3	4	58KG/8M	63KG/8M	7.5	8


PVC Crimp Solution


Name: Water Pump Suction-Boxed
Packaging: Cut and coupled to length
Couplings: Camlock, Pinlug
Steel Bauer, King Nipple
Crimp: Steel Sleeve & SS Sleeve
Tool: Spanner Wrench




Features:

Use the Sleeve instead of clamp ,Will be more strength & Simple when assembly
widely-used Size is 2" 3" 4"


Camlock-Type C		
	1-1/2"	C-125M-AL
	1-1/4"	C-150M-AL
	2"	C-200M-AL
	2-1/2"	C-250M-AL
	3"	C-300M-AL
	4"	C-400M-AL


Camlock-Type E		
	1-1/2"	E-125M-AL
	1-1/4"	E-150M-AL
	2"	E-200M-AL
	2-1/2"	E-250M-AL
	3"	E-300M-AL
	4"	E-400M-AL

Pinlug		
	1-1/2"	PLS-150
	2"	PLS-200
	2-1/2"	PLS-250
	3"	PLS-300
	4"	PLS-400
	6"	PLS-600


Strainer		
	1-1/2"	RHS150
	2"	RHS200
	2-1/2"	RHS250
	3"	RHS300
	4"	RHS400
	6"	RHS600


PVC Crimp Solution

Steel Bauer		
	2"	BAUER-200
	3"	BAUER-300
	4"	BAUER-400
	5"	BAUER-500
	6"	BAUER-600
	8"	BAUER-800
	10"	BAUER-1000

King nipple		
	1-1/2"	KC125
	1-1/4"	KC150
	2"	KC200
	2-1/2"	KC250
	3"	KC300
	4"	KC400
	6"	KC600

Steel Sleeve		
	1-1/4"	FES125
	1-1/2"	FES150
	2"	FES200
	2-1/2"	FES250
	3"	FES300
	4"	FES400
	6"	FES600

Spanner Wrench		
	1-1/2"	SW-150
	2"	SW-200
	2-1/2"	SW-250
	3"	SW-300
	4"	SW-400

AL Camlock-Type A		
	1-1/4"	A-125-AL
	1-1/2"	A-150-AL
	2"	A-200-AL
	2-1/2"	A-250-AL
	3"	A-300-AL
	4"	A-400-AL


PVC Crimp Solution


Name: Fertilizer Solution Pump Suction-Boxed
Packaging: Cut and coupled to length
Couplings:AL PP Camlock, 90°PP Coupling
Crimp:Steel Sleeve & Clamp





Features:

Use the Sleeve instead of clamp ,Will be more strength & Simple when assembly
widely-used Size is 2" 3" 4"

PP Camlock-Type C		
	1-1/4"	C-125-PP
	1-1/2"	C-150-PP
	2"	C-200-PP
	2-1/2"	C-250-PP
	3"	C-300-PP
	4"	C-400-PP

PP Camlock-Type E		
	1-1/4"	E-125-PP
	1-1/2"	E-150-PP
	2"	E-200-PP
	2-1/2"	E-250-PP
	3"	E-300-PP
	4"	E-400-PP

90° PP Male		
	1-1/4"	C-125-PP
	1-1/2"	C-150-PP
	2"	C-200-PP
	2-1/2"	C-250-PP
	3"	C-300-PP
	4"	C-400-PP

Poly-Strainer		
	1	SPS100
	1-1/2"	SPS150
	2"	SPS200


Workshop



Workshop



Workshop

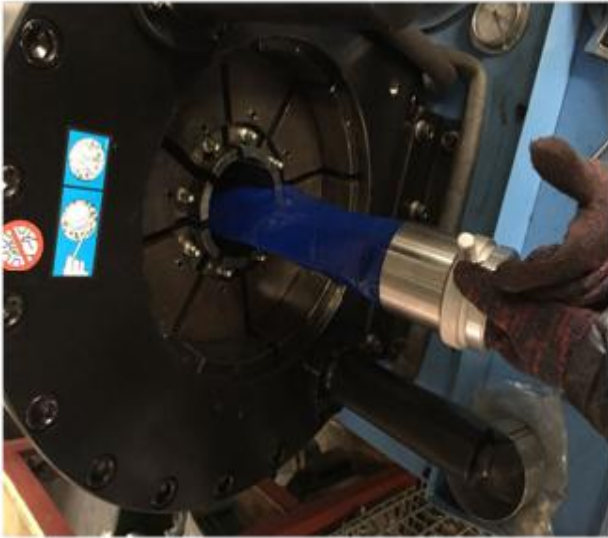

ISO 9001
 CERTIFICATION

浙江伟鑫金属制品有限公司
ZHE JIANG WAYSING METAL PRODUCTS
CO.,LTD

地址：浙江德清经济开发区双山路西侧150号
Add:West Side Of Shuang Shan Rd,Economical
Development Zone Deqing County,Zhejiang,China 313200
Tel:+86-572-8825970 Fax:+86-572-8823516
Mobile:+86-13362288855
E-Mail:richard@waysing.com



<http://www.waysing.com>