



Address :

No.42, Ln.251, KOUZHUANG St., Huatan Township, Changhua County 50353, Taiwan

TEL : 886-4-763 7070

FAX : 886-4-763 7080

URL : www.yhcaster.com

E-mail : yhcaster@hotmail.com



YH CASTER CO., LTD was founded in 1980, with more than 30 years of professional experience in the industry. At the beginning of its establishment, Y.H. ran business of new and second middles/small bearing roller to import from Japan and distributed domestically. In 1995, meeting the trend of market effect, the company began to develop and produce various kinds of bearings and rollers to meet customers' demands and won reputation and credibility of clients.

The company was divided into roller production department and bearing production department. Y.H. expect to supply high-qualified products with reasonable price to customers and meet the trend of diverse change of global market by direct integrated production style, and also provide customers better competition in the global market.

Making high-qualified products is the company's principle. Products are made by customers' demand or design, and applied to furniture, sourcing, machinery, food, medical equipment, DIY hardware market and other professional field. The company also accepts customers' drawing orders. Good design and strict quality control make every product as the essence of the company.

The trademark of Y.H. means "top technology", "research and development", "honesty and service", "quality first". It's the guaranty for the best service.

Y.H. in the 21st century will develop products with advanced technology and run sustainable business by high-qualified products with reasonable price. Any suggestions from professional I the industry are welcome.

The features and complete advantages of our products can be listed as following: Price, OEM is Welcome, Excellent and High Quality Control, our overseas markets mostly face on Global.

We never stop upgrading our R&D capability and technical-know-how to seize every opportunity to make our innovative products worldwide.

Overseas as well as domestic importers and trades are welcome to develop a solid relationship with us.

2014.09 ISO 9001 & 14001 coach by Kind Consulting

2015.04 ISO 9001 & 14001 by TÜV Rheinland

3823 、5023HTPR CASTER



3823 HTPR Caster

1. Wheel : 38mm x 23 mm , **HTPR** Share A 65
2. Top Plate : 2 mm (44mm x 44mm)
3. Threaded Stem : 3/8" , 19mm
4. Bolt Hole Spacing : 6.4mm@31.5mm x 31.5mm
5. Height : 60 mm , Load : 35 kg /pc

ITEM	FOB Price (\$US)	NO.
38x23 HTPR Caster Swivel		3823TPRA01
38x23 HTPR Caster Swivel w/Break		3823TPRA02
38x23 TPR Thread stem (3/8"X3/4")		3823TPRA03
38x23 HTPR Thread stem side break (3/8"x3/4")		3823TPRA04
38x23 HTPR Rigid		3823TPRA05

5023 HTPR Caster

1. Wheel : 50mm x 23 mm , **HTPR (2pcs bearing)** Share A 65
2. Top Plate : 2 mm (50mm x 50mm)
3. Threaded Stem : 3/8" , 19mm
4. Bolt Hole Spacing : 6.4mm@38.5mm x 38.5mm
5. Height : 70 mm , Load : 40 kg /pc
6. Wheel Optional : PP 、5020TPR(No bearing)

ITEM	FOB Price (\$US)	NO
50x23 HTPR Caster Swivel		5023TPRA01
50x23 HTPR Caster Swivel w/Break		5023TPRA02
50x23 TPR Thread stem (3/8"X3/4")		5023TPRA03
50x23 HTPR Thread stem side break (3/8"x3/4")		5023TPRA04
50x23 HTPR Rigid		5023TPRA05

2"TPR Caster



2" T PR caster



2" PP caster

1. Wheel : 50mm x 20 mm , TPR
2. Top plate : 2 mm (50mm x 50mm)
3. Threaded stem : 3/8" , 19mm
4. Bolt Hole Spacing : 6.5mm@38mm x 38mm
5. Height : 66 mm , Load : 30 kg

Wheel Optional : PU 、 TPR 、 Rubber 、 PP 、 Nylon

ITEM	NO.	ITEM	NO.
2" TPR plate swivel	278PPUA01	2" Rubber plate swivel	278RRA01
2" TPR plate swivel side break	278PPUA02	2" Rubber plate swivel side break	278RRA02
2" TPR thread stem (3/8")	278PPUA03	2" Rubber thread stem (3/8")	278RRA03
2" TPR thread stem side break (3/8")	278PPUA04	2" thread stem side break (3/8")	278RRA04
2" TPR Rigid	278PPUA05	2" Rubber Rigid	278RRA05
2" TPR caster PT threaded	278PPU-C	2.5" Rubber plate swivel	25RRA01
2" PP caster plate swivel	278PPA1	2.5" Rubber thread stem (3/8")	25RRA02
2" PP caster plate swivel side break	278PPA2	2" PP thread stem (3/8")	278PPA03
2" PP caster Rigid	278PPA05	2" PP thread stem side break (3/8")	278PPA04

3x1 PVC Caster



1. Wheel : 3" x 1" PVC , Rubber , PP
2. Top plate : 2 mm (60mm x 73mm)
3. Threaded stem : 3/8" , 32mm
4. Bolt Hole Spacing : 8mm@46mm x 60mm
5. Height : 96 mm , Load : 35 kg /pc


ITEM.	Price FOB Taiwan	NO.
3" x 1" PVC plate swivel		310PVCA01
3" x 1" PVC plate swivel side break		310PVCA02
3" x 1" PVC thread stem (3/8" /32mm)		310PVCA03
3"x1" PVC thread stem side break (3/8" /32mm)		310PVCA04

2.5" TPR Caster



1. Wheel : 62mm x 30 mm , Ball bearing 608 , or Tire-PU
2. Top plate : 3 mm (58mm x 70mm)
3. Threaded stem : 3/8" , 32mm OR 1/2" , 25mm
4. Bolt Hole Spacing : 8mm@42mm x 55mm
5. Height : 89 mm , Load : 65 kg /pc

ITEM	NO.
2.5" TPR plate swivel	253PPUA01
2.5" TPR plate swivel w/ break	253PPUA02
2.5" TPR thread stem (3/8" /25mm)	253PPUA03
2.5" TPR thread stem w/ break (3/8" /25mm)	253PPUA04
2.5" TPR thread stem (1/2" /25mm)	253PPUA05
2.5" TPR thread stem w/ break (1/2" /25mm)	253PPUA06
2.5" TPR Rigid	253PPUA07

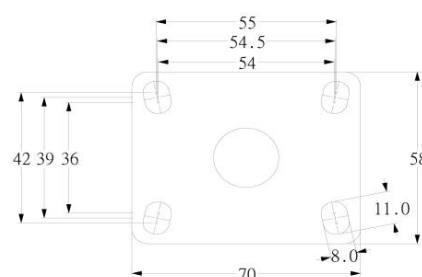


3" TPR caster (include ball bearing 6200)



1. Wheel : 3" x 1" Tire- TPR , Ball bearing #6200
2. Top plate: 2 mm (65mm x 75mm) OR 3 mm (58mm x 70mm)
3. Threaded stem : 3/8" , 25mm OR 1/2" , 25mm , M12
4. Bolt Hole Spacing : 8mm@47mm x 57mm
5. Height : 104 mm , Load : 65 kg /pc

ITEM	NO.
3"x 1" TPR plate swivel	310TPRA01
3"x 1" TPR plate swivel w/ break	310TPRA02
3"x 1" TPR thread stem (1/2" /25mm)	310TPRA03
3"x 1" TPR thread stem with total break (1/2" /25mm)	310TPRA04
3"x 1" TPR thread stem (3/8" /25mm)	310TPRA05
3"x 1" TPR thread stem with total break (3/8" /25mm)	310TPRA06
3"x 1" TPR Rigid	310TPRA07

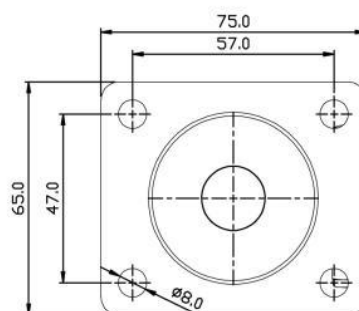

3"X1" TPR caster (include ball bearing 6200)



1. Wheel : 3" x 1" Tire- TPR , Ball bearing #6200
2. Top plate : 2 mm (60mm x 73mm) OR 3 mm (58mm x 70mm)
3. Threaded stem : 3/8" , 25mm OR 1/2" , 25mm , M12
4. Bolt Hole Spacing : 8mm@47mm x 57mm
5. Height : 104 mm , Load : 65 kg/pc

ITEM	NO.
3"x 1" TPR plate swivel	25-310TPR-0RA01
3"x 1" TPR plate swivel w/ break	25-310TPR-0RA02
3"x 1" TPR thread stem (1/2" /25mm)	25-310TPR-0RA03
3"x 1" TPR thread stem w/ break (1/2" /25mm)	25-310TPR-0RA04
3"x 1" TPR thread stem (3/8" /25mm)	25-310TPR-0RA05
3"x 1" TPR thread stem with total break (3/8" /25mm)	25-310TPR-0RA06
3"x 1" TPR Rigid	25-310TPR-0RA07

3" PVC caster OR Hard Rubber



1. Wheel : 3" x 1" Tire-PP , no Bearing , OR Hard Rubber
2. Top plate : 2 mm (60mm x 73mm) OR 3 mm (58mmx70mm)
3. Threaded stem : 3/8" , 25mm OR 1/2" , 25mm , M12
4. Bolt Hole Spacing : 8mm@47mm x 57mm
5. Height : 104 mm , Load : 50 kg/pc (3" x 1" Tire-PVC) , 65 kg/pc ((3" x 1" Tire-Rubber)


ITEM	NO.	ITEM	NO.
3" PP plate swivel	310PPC1	3" Rubber plate swivel	310R1
3" PP plate swivel w/ break	310PPC2	3" Rubber plate swivel w/ break	310R2
3" PP thread stem (1/2" /25mm)	310PPC3	3" Rubber thread stem (1/2" /25mm)	310R3
3" PP thread stem w/ break (1/2" /25mm)	310PPC4	3" Rubber thread stem w/ break (1/2" /25mm)	310R4
3" PP thread stem (3/8" /25mm)	310PPC5	3" Rubber thread stem (3/8" /25mm)	310R5
3" PP thread stem w/ break (3/8" /25mm)	310PPC6	3" Rubber thread stem w/ break (3/8" /25mm)	310R6
3" PP Rigid	310PPC7		

314" PU Caster



1. Wheel : 3" x 1-1/4" Tire- PU OR TPR , Bearings
2. Top plate: 3 mm (67mm x 95mm)
3. Threaded stem : 3/8" , 25mm OR 1/2" , 25mm , M12
4. Bolt Hole Spacing : 8.4mm@45mm x 75mm
5. Height : 110 mm , Load : 80 kg/pc

ITEM	NO.
314 PU plate swivel	6-314PUA01
314 PU plate swivel w/ break	6-314PUA02-TB
314 PU plate swivel Side break	6-314PUA03-SB
314 PU Rigid	6-314PUA04
314 PU thread stem (1/2"x1")	6-314PUA05
314 PU thread stem Side break (1/2"x1")	6-314PUA07-SB

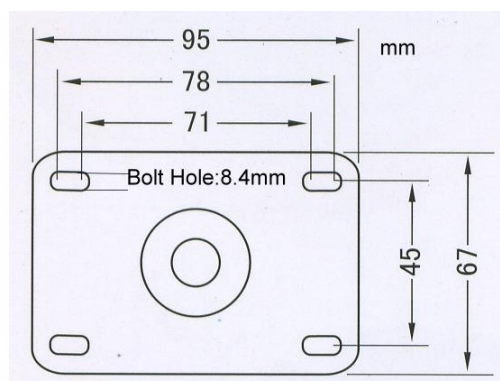


314TPR caster



1. Wheel : 3" x 1-1/4" Tire- PU OR TPR , Bearings
2. Top plate: 3 mm (67mm x 95mm)
3. Threaded stem : 1/2" , 25mm
4. Bolt Hole Spacing : 8.4mm@45mm x 75mm
5. Height : 110 mm , Load : 100kg/pc

ITEM	NO.
314 TPR plate swivel	6-314TPRA01
314 TPR plate swivel w/ break	6-314TPRA02-TB
314 TPR plate swivel Side break	6-314TPRA03-SB
314 TPR Rigid	6-314TPRA04
314 TPR thread stem (1/2" /25mm)	6-314TPRA05
314 TPR thread stem w/ break (1/2" /25mm)	6-314TPRA06-TB
314 TPR thread stem Side break (1/2" /25mm)	6-314TPRA07-SB

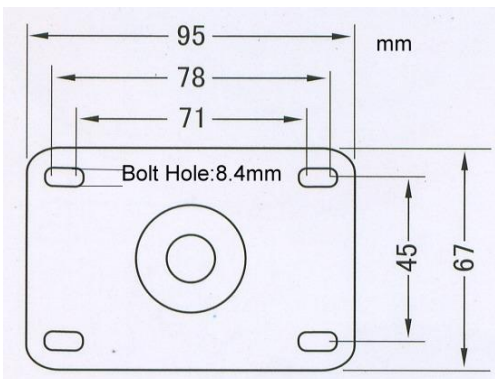


314 PP Caster



1. Wheel : 3" x 1-1/4" PP OR Hard Rubber
2. Top plate : 3 mm (67mm x 95mm)
3. Threaded stem : 1/2" , 25mm
4. Bolt Hole Spacing : 8.4mm@45mm x 75mm
5. Height : 110 mm , Load : 80 kg/pc

ITEM	NO.
314 PP plate swivel	6-314PPA01
314 PP plate swivel w/ break	6-314PPA02-TB
314 PP plate swivel Side break	6-314PPA03-SB
314 PP Rigid	6-314PPA04
314 PP thread stem (1/2" /25mm)	6-314PPA05
314 PP thread stem w/ break (1/2" /25mm)	6-314PPA06-TB
314 PP thread stem Side break (1/2" /25mm)	6-314PPA07-SB

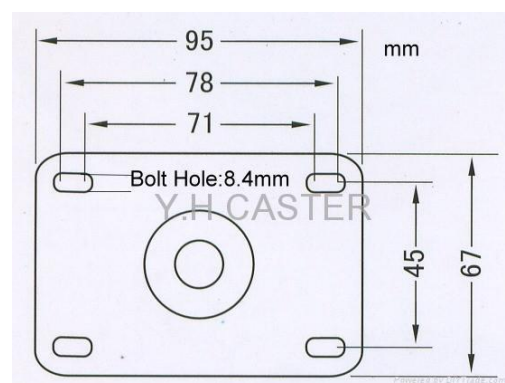


414 PU Caster



1. Wheel : 4" x 1-1/4" Tire- PU , Bearing #6201
2. Top plate : 3 mm (67mm x 95mm)
3. Threaded stem : 1/2"X1-1/8" OR 5/8"X1-1/8"
4. Bolt Hole Spacing : 8.4mm@45mm x 75mm
5. Height : 137 mm , Load : 90 kg /pc

ITEM	NO.
414 PU plate swivel	6-414PUA01
414 PU plate swivel w/ break	6-414PUA02-TB
414 PU Rigid	6-414PUA04
414 PU thread stem (1/2"X1-1/8")	6-414PUA05
414 PU thread stem w/ break (1/2"x1-1/8")	6-414PUA06-TB
414 PU thread stem (5/8"X1-1/8")	6-414PUA07
414 PU thread stem w/ break (5/8"x1-1/8")	6-414PUA08-TB

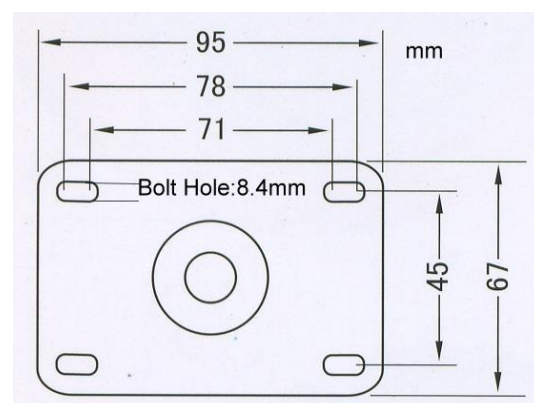


414 TPR Caster



1. Wheel : 4" x 1-1/4" Tire- TPR , Bearing #6201
2. Top plate : 3 mm (67mm x 95mm)
3. Threaded stem : 1/2"X1-1/8" OR 5/8"X1-1/8"
4. Bolt Hole Spacing : 8.4mm@44mm x 75mm
5. Height : 137 mm , Load : 100 kg/pc

ITEM	NO.
414 TPR plate swivel	6-414TPRA01
414 TPR plate swivel w/ break	6-414TPRA02-TB
414 TPR Rigid	6-414TPRA04
414 TPR thread stem (1/2"X1-1/8")	6-414TPRA05
414 TPR thread stem w/ break (1/2"x1-1/8")	6-414TPRA06-TB
414 TPR thread stem (5/8"X1-1/8")	6-414TPRA07
414 TPR thread stem w/ break (5/8"x1-1/8")	6-414TPRA08-TB

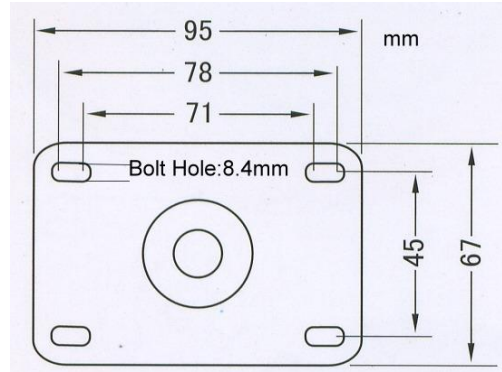


4" TPR Caster



1. Wheel : 4" x 1-1/4" Tire- TPR , Bearing #6201
2. Top plate : 3 mm (67mm x 95mm) OR 3mm (58mm x 70mm)
3. Threaded stem : 1/2"X1-1/8" , M12
4. Bolt Hole Spacing : 8mm@53mm x 72mm
5. Height : 125 mm , Load : 65 kg/pc

ITEM	NO.
4" TPR plate swivel	410PPUA01
4" TPR plate swivel w/ break	410PPUA02
4" TPR thread stem (1/2"X1-1/8")	410PPUA03
4" TPR thread stem w/ break (1/2"x1-1/8")	410PPUA04

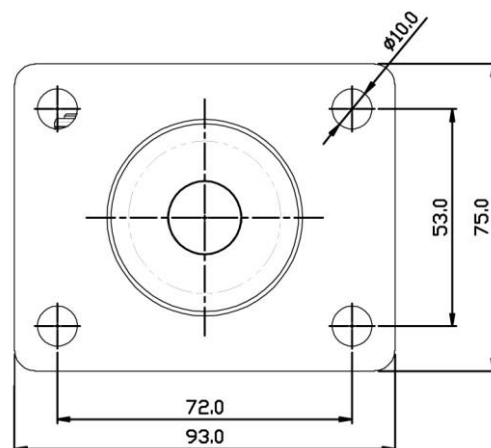


4" Rubber Caster



1. Wheel : 100mm x 25mm Tire- Rubber
2. Top plate : 2 mm (75mm x 93mm)
3. Threaded stem : 1/2" , 25mm
4. Bolt Hole Spacing : 8mm@53mm x 72mm
5. Height : 132 mm , Load : 65 kg/pc

ITEM	NO.
4" Rubber plate swivel	4A0NBRA01
4" Rubber plate swivel w/ break	4A0NBRA02
4" Rubber thread stem (1/2" /25mm)	4A0NBRA03
4" Rubber thread stem w/ break (1/2" /25mm)	4A0NBRA04
4" Rubber Rigid	4A0NBRA05

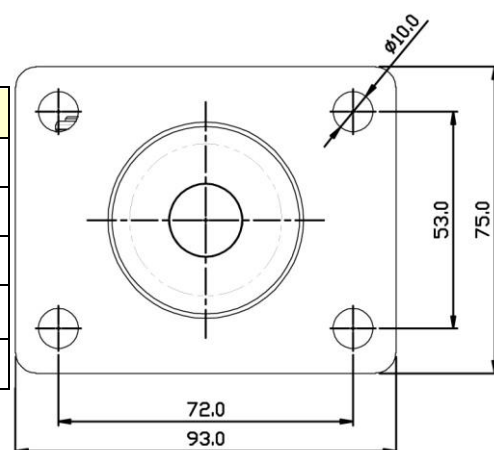


514 PU Caster



1. Wheel : 5" x 1-1/4" Tire- PU , 2 Bearings
2. Top plate : 3 mm (67mm x 95mm)
3. Threaded stem : 1/2"X1-1/8" OR 5/8"X1-1/8"
4. Bolt Hole Spacing : 8.4mm@44mm x 75mm
5. Height : 160 mm , Load : 100 kg/pc

ITEM	NO.
514 PU plate swivel	6-514PUA01
514 PU plate swivel w/ break	6-514PUA02-TB
514 PU Rigid	6-514PUA04
514 PU thread stem (1/2"X1-1/8")	6-514PUA05
514 PU thread stem w/ break (1/2"x1-1/8")	6-514PUA06-TB
514 PU thread stem (5/8"X1-1/8")	6-514PUA07
514 PU thread stem w/ break (5/8"x1-1/8")	6-514PUA08-TB

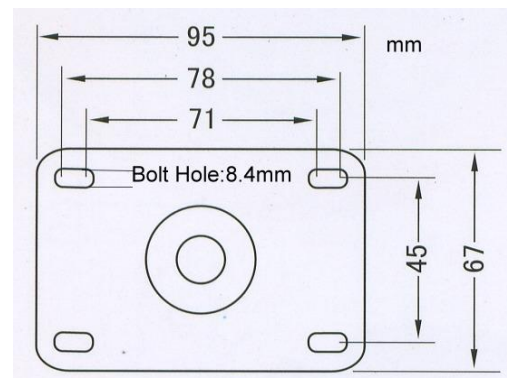


514 TPR Caster



1. Wheel : 5" x 1-1/4" Tire- TPR , HTPR , Bearing
2. Top plate: 3 mm (67mm x 95mm)
3. Threaded stem : 1/2"X1-1/8" OR 5/8"X1-1/8"
4. Bolt Hole Spacing : 8.4mm@45mm x 75mm
5. Height : 160 mm , Load : 100 kg/pc

ITEM	NO.
514 TPR plate swivel	6-514TPRA01
514 TPR plate swivel w/ break	6-514TPRA02-TB
514 TPR Rigid	6-514TPRA04
514 TPR thread stem (1/2")	6-514TPRA06
514 TPR thread stem w/ break (1/2")	6-514TPRA07-TB
514 TPR thread stem (5/8")	6-514PUA08
514 TPR thread stem w/ break (5/8")	6-514PUA09-TB

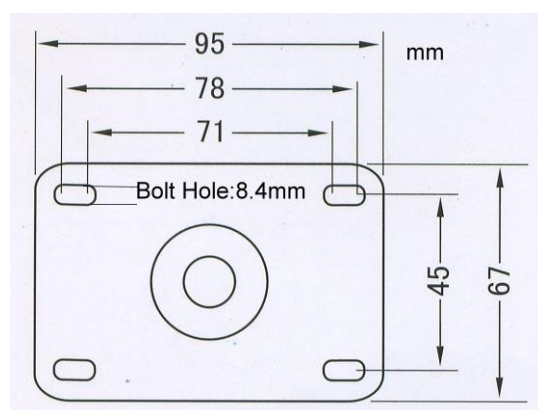

C4 , C5 TPR Caster



1. Wheel : 4"x1/4" , 5"x1/4" Tire- TPR Bearing OR PU
2. Top plate : 3 mm (85mm x 110mm)
3. Bolt Hole Spacing : 66mm x 88mm
4. Height : 4"(127mm) , 5"(153mm) , Load : 90 kg/pc

ITEM	NO.
C4 TPR plate swivel	414TPR-C01
C4 TPR Rigid	414TPR-C02
C4 PU plate swivel	414PU-C03
C4 PU Rigid	414PU-C04
C5 TPR plate swivel	514TPR-C01
C5 TPR Rigid	514TPR-C02
C5 PU plate swivel	514PU-C03
C5 PU Rigid	514PU-C04

5"TPR-28 Caster



1. Wheel : 125 mm x 30 mm Tire- TPR , Bearing
2. PT Threaded : 28mm x 45mm x M8

ITEM	NO.
5" TPR-28 plate swivel	514TPR-28-1
5" TPR-28 plate swivel w/ break	514TPR-28-2

5"TPR-21.5mm Square



1. Wheel : 125 mm x 30 mm Tire- TPR , Bearing
2. PT Threaded : 21.5mm x 47mm x 6.5mm


ITEM	NO.
574 TPR Square plate swivel	H-574-40-1
574 TPR Square plate swivel w/ break	H-574-40-2

2” x 2” Machine Caster Wheel



- 1. Wheel : 2” x 2” Tire- HTPR Bearing x4 or Nylon
- 2. Top plate : 67mm x 95mm
- 3. Threaded stem : 1/2”
- 4. Bolt Hole Spacing : 45mm x 78mm
- 5. Load : 150 kg/pc

ITEM	Bearing
2 x 2 Machine Nylon plate swivel (Black)	NO
2 x 2 Machine Nylon threaded stem (1/2”)	NO
2 x 2 Machine HTPR plate swivel	4 pcs
2 x 2 Machine HTPR threaded stem (1/2”)	4 pcs

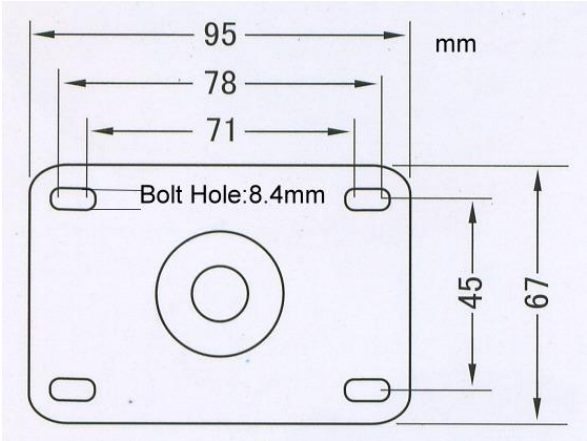


3” x 2” Machine Caster



- 1. Wheel : 3” x 2” Tire- PP 、High Temperature Nylon Bearing #6200
- 2. Top plate : 4mm (80mm x 105mm)
- 3. Bolt holes Spacing: 61mm x 80mm (50.5mm x 72.5mm)
- 4. Height : 103 mm , Load : 250 kg /pc

ITEM	NO.
3 x 2 Machine swivel	320PPA01
3 x 2 Machine swivel w/brake	320PPA02
3 x 2 Machine Rigid	320PPA03

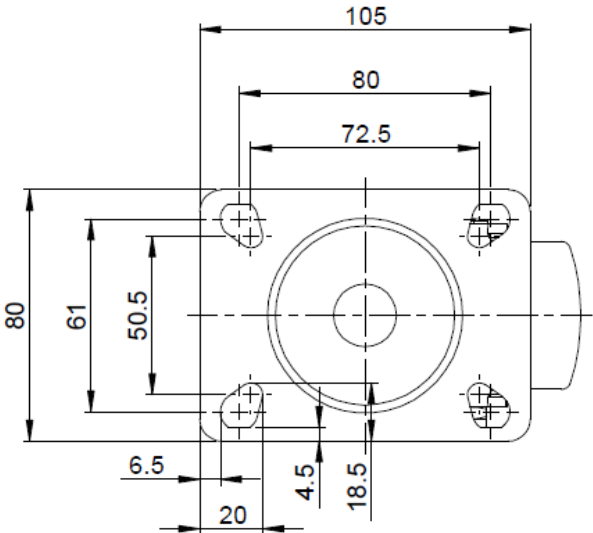

3x2 Machine + level adjusters (Bearing x2pcs #6200)-(Patent)

Wheel : 1. PP(basic) 2. TPR 3. Nylon 4. ESD TPR 5. ESD Nylon

Top plate : 80(W) x 187(L) x 5(H)mm


Bolt Hole : 60 x 80+80

Level adjusters height : 107.5 mm

Moving loading : 250 kg/pc

Characteristic :

1. Caster after heat treatment that can be longevous.
2. Being with 2 pieces Bearing #6200 that more longevous than normal Bearing.
3. Using TPR Caster that can be steady and prevent cargos be damaged.
4. Using ESD Caster that can prevent electronic products be damaged.

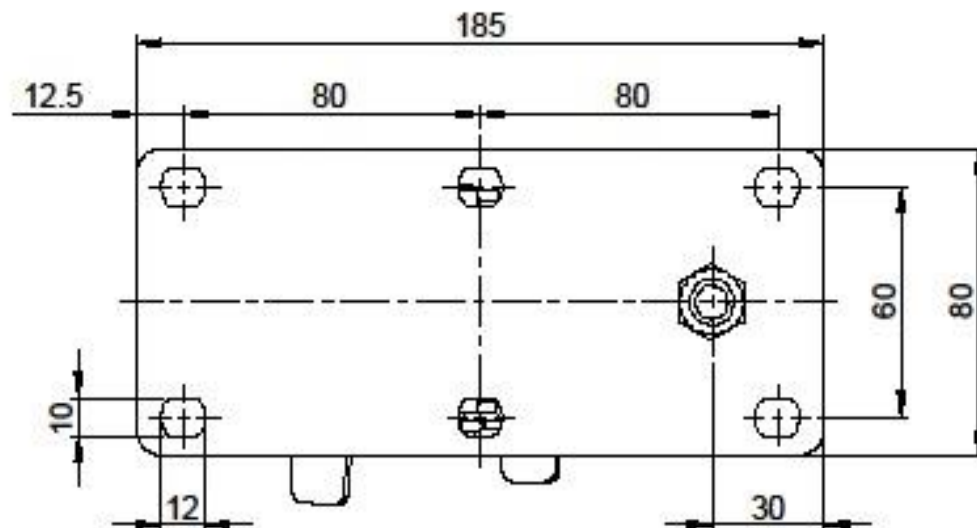

Plastic Hand Cart



1. Wheel : Tire- PU or TPR , Ball bearing or No bearing
2. Wheel Size : 4" -101 mm x 31 mm (4"x1-1/4") 、 5" -126 mm x 30 mm (5"x1-1/4")
3. Cart size : 40cm x 60cm , 48cm x 73cm , 51cm x 81cm
4. Load : 150 kg (340 lbs.)

ITEM	Size	
Mini hand cart-4" TPR Caster	40cm x 60cm	TPR Caster Bearing Easy moving
24 hand cart-5" TPR Caster	48cm x 73cm	
27 hand cart-5" TPR Caster (no bearing)	51cm x 81cm	
27 hand cart-6" TPR Caster	51cm x 81cm	
Giant hand cart-8" TPR Caster (no bearing)	60cm x 91cm	

2x3 feet Ammonium -fixed trolley




Load : 600kg

Wheel : 8x2" TPR Caster (85 A) with 2pcs Bearing , silence/ non-marking / durable

Characteristic : Not rust, diaoqi and the price is cheaper than stainless steel

Drum Dollies (600x600)

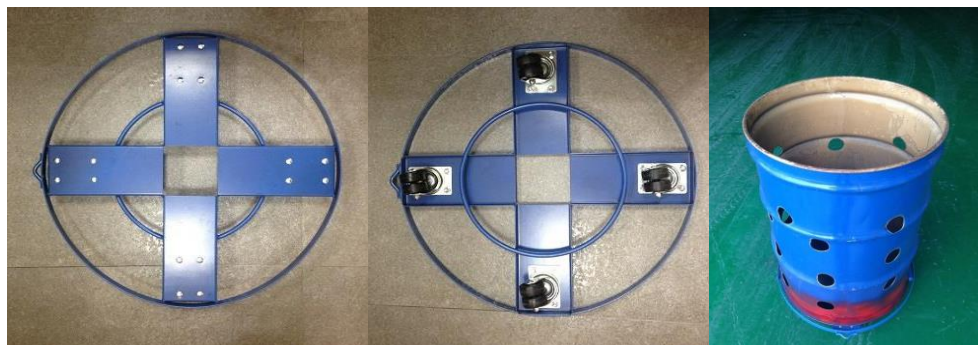

ITEM	TYPE	LOAD	
Drum Dollies (600x600)	314 Red Caster (1pc Bearing)	300 KG	Caster after heat treatment that can be easy working
	2x2 Machine Caster (4pcs Bearing)	450 KG	
	3x2 Machine Caster (2pcs Bearing)		

Materials trolley (Iron / steel / stainless steel)



1. Material : angle iron, wheel all by 16 screws fixed
2. Size : Large (45cm x 65cm) 、 Small (34cm x 54cm)
3. Wheel : 2.5” 、 3” 、 4” 、 5” ， PU 、 TPR 、 PP ， Side break 、 Total break
4. Advantage : Made of angle iron
5. Repair : Just change new caster that useful as before
6. Customized
7. Standard : 314 PU caster plate swivel /4pcs

Specification	ITEM	NO.
Large 45cm x 65mm Iron/ steel/ stainless steel	314 PU	Z-004-314PU
	314 PP	Z-004-314PP
	314 TPR	Z-004-314TPR
	414 PU	Z-004-414PU
	414 TPR	Z-004-414TPR
	514 PU	Z-004-514PU
	514 TPR	Z-004-514TPR
Small 34cm X 54cm Steel	314 PU	Z-005-314PU
	314 PP	Z-005-314PP
	314 TPR	Z-005-314TPR
Material hook steel/ stainless steel		Z-004E

6" Rubber Caster



1. Wheel : 150mm x 40mm
2. Top plate : 6mm (101mm x 116mm)
3. Bolt Hole : 11.5mm@ 67mm x 92mm slotted 76.2mm x 76.2mm
4. Height : 190mm , Load : 300kg

Rubber heavy caster

ITEM	HEIGHT	FOB Price (\$US)	NO.
6" JP Rubber swivel	190mm (7-1/2")		615JR-1
6" JP Rubber Rigid			615JR-2
6" JP Rubber swivel side break			615JR-3

4" , 5" Aluminum Caster



1. Wheel : 410 Rubber caster , 410TPR caster (Bearing #6200) , 574 TPR caster
2. Top plate : 62mm x 102mm
3. Bolt Hole : 40mm x 81mm
4. Load : 70kg /pc

ITEM	HEIGHT	FOB Price (\$US)	NO.
4" Aluminum (Black caster) swivel	121mm (4-2/4")		C62-410RR-1
4" Aluminum (Black caster) Rigid			C62-410RR-2
4" Aluminum (Gray TPR caster) swivel			C62-410PU-1
4" Aluminum (Gray TPR caster) Rigid			C62-410PU-2
5" Aluminum (TPR) swivel	152mm (6")		C62-514TPR-1
5" Aluminum (TPR) Rigid			C62-514TPR-2

40mm / 50mm Ball Caster



1. Wheel : 40mm and 50 mm PP
2. Height : 55mm (40mm Ball caster) , 63mm (50mm Ball caster) , Load : 20 kg/pc

ITEM	FOB PRICE (\$US)	NO.
40mm Ball caster plate swivel		40B-1
40mm Ball caster thread stem (3/8"X19mm)		40B-2
50mm Ball caster plate swivel		50B-1
50mm Ball caster thread stem (3/8"X19mm)		50B-2


40mm / 50mm Furniture Caster



1. Wheel : 40mm / 50mm Nylon
2. Top plate : 2mm (38mm x 38mm)
3. Tread stem : 3/8 , 5/16 , M8
4. Height : 55 mm(40mm caster) , 67mm (50mm caster) , Load : 15kg/pc

ITEM	FOB Price (\$US)	NO.
40mm plate swivel		F40-01
40mm plate swivel with break		F40-02
40mm thread stem (3/8")		F40-03
40mm thread stem with break (3/8")		F40-04
40mm thread stem (5/16")		F40-05
40mm thread stem with break (5/16")		F40-06
40mm thread stem (M8)		F40-07
40mm thread stem with break (M8)		F40-08
50mm plate swivel		F50-01
50mm plate swivel with break		F50-02
50mm thread stem (3/8")		F50-03
50mm thread stem with break (3/8")		F50-04
50mm thread stem (5/16")		F50-05
50mm thread stem with break (5/16")		F50-06
50mm thread stem (M8)		F50-07
50mm thread stem with break (M8)		F50-08

4x2 , 5x2 , 6x2 , 8x2 Nylon Heavy Caster (Japan Ube Nylon)

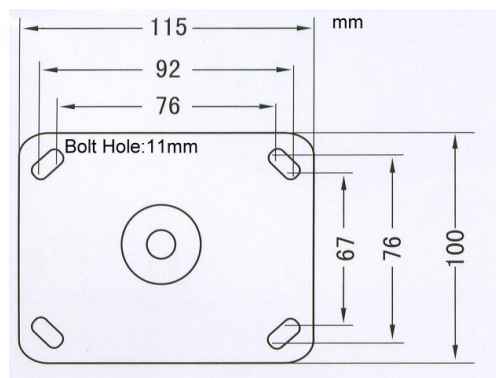

1. Wheel : (4" x 2") , (5" x 2") , (6" x 2") , (8" x 2") , White Nylon , #6204ZZ
2. Top plate : 6mm (101mm x 116mm)
3. Bolt Hole : 11.5mm@ 67mm x 92mm slotted 76.2mm x 76.2mm
4. Load : 5" (300kg/pc) , 6" (350kg/pc) , 8" (400kg/pc)

ITEM	HEIGHR	FOB Price (\$US)	NO.
5X2 Nylon swivel	165mm		520NLA01
5X2 Nylon Rigid			520NLA02
5X2 Nylon side break			520NLA03
6X2 Nylon swivel	190mm		620NLA01
6X2 Nylon Rigid			620NLA02
6X2 Nylon side break			620NLA03
8X2 Nylon swivel			820NLA01
8X2 Nylon Rigid			820NLA02
8X2 Nylon side break			820NLA03

6 X 3 , 8 X 3 PU Forging Heavy Caster



6 X 3 Forging Caster :


Wheel : 6"x 3"

Top plate : 185mm x 134mm

Bolt Hole: 14mm@150mm x 100mm

Height : 212mm

Load : 6x3 PU (300kg/pc)
8x3 PU (1500kg/pc)

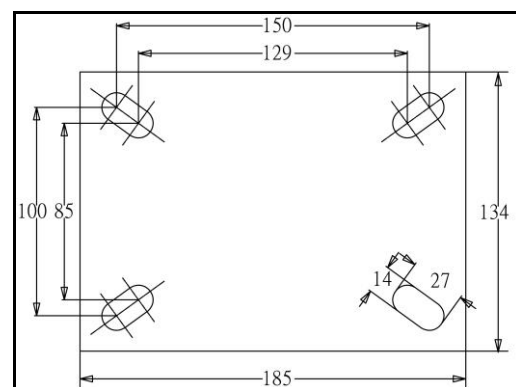

4x2 , 5x2 , 6x2 , 8x2 Nylon Forging Heavy Caster (Japan Ube Nylon)



Forging forming wheel carrier


Heat-treated forged steel

Steel ball turntable CNC Precision Machining


- 1. Wheel : 125 x 50mm , 150 x 50mm , 200 x 50mm , Japan Ube Nylon Bearing #6204ZZ
- 2. Top plate : 9.5mm (100mm x 115mm)
- 3. Bolt Hole : 11.5mm@ 67mm x 92mm slotted 76.2mm x 76.2mm
- 4. Load : 4” (800kg/pc) , 5” (800kg/pc) , 6” (850kg/pc) , 8” (900kg/pc)

Forging Heavy Caster

ITEM	HEIGHT	NO.
4X2 Nylon swivel	147mm	420NLB01
4X2 Nylon Rigid		420NLB02
4X2 Nylon break		420NLB03
5X2 Nylon swivel	170mm	520NLB01
5X2 Nylon Rigid		520NLB02
5X2 Nylon break		520NLB03
6X2 Nylon swivel	195mm	620NLB01
6X2 Nylon Rigid		620NLB02
6X2 Nylon break		620NLB03
8X2 Nylon swivel	247mm	820NLB01
8X2 Nylon Rigid		820NLB02
8X2 Nylon break		820NLB03

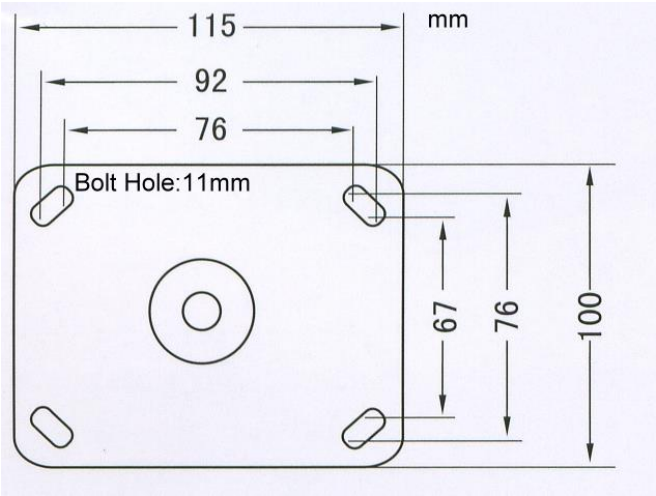


5x2 , 6x2 , 8x2 HTPR Heavy Duty caster

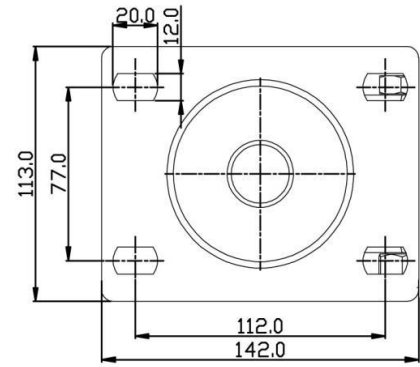

1. Wheel : (5" x 2") , 6" x 2") , 8" x 2")
2. Tire- HTPR , Hardness Share A 65 , all Bearing x2pcs #6203
3. Top plate : 5 mm (113mm x 142mm)
4. Bolt Hole : 12mm x 20mm@77mm x 112mm
5. Load : 5" (300kg/pc) , 6" (350kg/pc) , 8" (400kg/pc)
- 6.

ITEM	HEIGHT	NO.
5 x 2 TPR swivel	169mm	520TPRA01
5 x 2 TPR swivel Side break		520TPRA02
5 x 2 TPR Rigid		520TPRA03
6 x 2 TPR swivel	194mm	620TPRA01
6 x 2 TPR swivel Side break		620TPRA02
6 x 2 TPR Rigid		620TPRA03
8 x 2 TPR swivel	244mm	820TPRA01
8 x 2 TPR swivel Side break		820TPRA02
8 x 2 TPR Rigid		820TPRA03

5x2 , 6x2 , 8x2 HTPR Heavy Caster

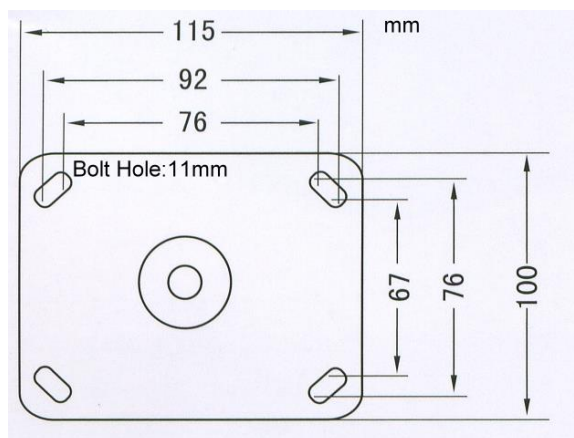

1. Wheel : (5" x 2") , 6" x 2") , 8" x 2") , Tire- HTPR , Hardness Shore A 65 , all Bearing x2pcs #6203ZZ
2. Top plate : 6mm (101mm x 116mm)
3. Bolt Hole : 11.5mm@ 67mm x 92mm slotted 76.2mm x 76.2mm
4. Load : 5" (300kg/pc) , 6" (350kg/pc) , 8" (400kg/pc)

Heavy caster

ITEM	Height	FOB Price (\$US)	NO
5X2 HR swivel	165mm (6-1/2")		520HRA01
5X2 HR swivel side break			520HRA02
5X2 HR Rigid			520HRA03
6X2 HR swivel	190mm (7-1/2")		620HRA01
6X2 HR swivel side break			620HRA02
6X2 HR Rigid			620HRA03
8X2 HR swivel	241mm (9-1/2")		820HRA01
8X2 HR swivel side break			820HRA02
8X2 HR Rigid			820HRA03
6X1-1/2 TPR swivel	190mm (7-1/2")		615TPRA01
6X1-1/2 TPR Rigid			615TPRA02
6X1-1/2 TPR side break			615TPRA03

3823 Stainless Caster



1. Wheel : 38mm x 22mm , Nylon , Stainless S304 , Stainless steel ball
2. Top plate : 2mm (44mm x 44mm)
3. Bolt Hole : 31.5mm x 31.5mm
4. Load : 35kg/pc

5023 Stainless Caster




1. Wheel : 50mm x 22mm , Nylon , Stainless S304 , Stainless steel ball
2. Top plate : 2mm (50mm x 50mm)
3. Bolt Hole : 38.5mm x 38.5mm
4. Load : 40kg/pc

314 、 414 、 514 Stainless Caster / High Temperature Caster



1. Wheel : 314(3"x1-1/4") 、 414(4"x1-1/4" 、 514 (5"x1-1/4")
2. Nylon 、 High Temperature(200℃) Stainless S304 , Stainless steel ball
3. Top plate : 3mm (62mm x 90mm)
4. Bolt Hole : 44mm x 73mm
5. Load : 140kg/pc

4x2、5x2、6x2、8x2 Stainless Caster

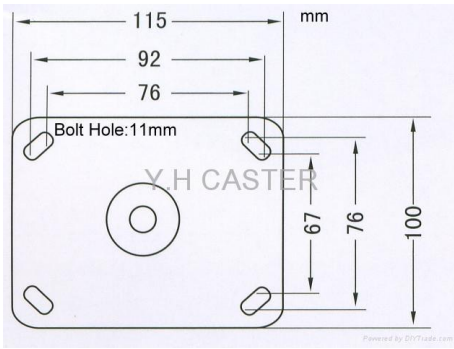

1. Wheel : 4"x2"、5"x2"、6"x2"、8"x2" , Nylon /TPR , Stainless S304 , Stainless steel ball
2. Top plate : 5mm (100mm x 115mm)
3. Bolt Hole : 76mm x 92mm
4. Load : NO Bearing(250kg/pc) 、Bearing(400kg/pc)

2" Transparent Caster



1. Wheel : 2" , PU
2. Top plate : 2mm (50mm x 50mm)
3. Bolt Hole : 38mm x 38mm
4. Load : 25kg/pc

3" Transparent Caster



1. Wheel : 3" , PU
2. Top plate : 2mm (65mm x 75mm)
3. Bolt Hole : 46mm x 57mm
4. Load : 50kg/pc

ESD Caster

ESD TPR easy moving caster 、non-marking 、Long life 、economic benefits

10e3-10e5Ω (DIN EN 100 015) 、 0e6-10e8Ω (DIN EN 100 015)

Share A 90(+5) 、Gray or Black

Using 75% alcohol or clear towel to clean tire is fine.

Quality Inspection :

When martials coming, check impedance is fine, or not.

When products marking, check impedance is fine, or not.

When products assembling, check impedance is fine, or not.

When products shipping, using clean carton and plastic bag to pack.

Item	Dia	Width	Hole	Load/pc	Load/4pcs	ESD	Wheel carrier type	
	mm			kg				Threaded stem
5023	50	23	6 / 8	40	120	TPR Steel	Swivel / Break / Rigid	2.5、3/8、M8、 PT threaded
2.5	61	30	8	65	195	TPR	Swivel / Break / Rigid	3/8、1/2
310	76	25	6 / 8	65	195	TPR	Swivel / Break / Rigid	3/8、1/2 M12
314	76	31	8/(3/8")	100	300	TPR	Swivel / Break / Rigid	1/2
414	100	31	8/(3/8")	100	300	TPR	Swivel / Break / Rigid	1/2
514	125	31	8/(3/8")	100	300	TPR	Swivel / Break / Rigid	1/2
415	100	38	15	150	450	TPR	Swivel / Break / Rigid	NO
515	125	38	15	150	450	TPR	Swivel / Break / Rigid	NO
615	150	38	15/17	150	450	TPR	Swivel / Break / Rigid	NO
520	125	50	17	250	750	TPR Nylon	Swivel / Break / Rigid	NO
620	150	50	17	250	750	TPR Nylon	Swivel / Break / Rigid	NO
820	200	50	17	250	750	TPR Nylon	Swivel / Break / Rigid	NO

Warranty :

When conducting permanent static discharge



Wheel is consumable



YGD – Caster with Adjust Level



- ✧ Wheel material : Nylon 6
- ✧ Frame : Aluminum alloys and iron

NO	Loading(kg)		 mm	 mm	 mm	 mm		
	1PCS	4PCS				mm	mm	mm
YGD-40F	50	100	84	50	69 + 5	55x55	42x42	6.5
YGD-60F	250	500	101	63	83 + 7	73x73	58x58	7
YGD-80F	500	1000	125	77	104 + 15	90x90	70x70	9
YGD-100F	750	1500	142	90	120 + 12	95x95	70x70	11
YGD-120F	1000	2000	141	88	120 + 12	95x95	70x70	11
YGD-150F	1500	3000	178	118	132 + 15	100x100	70x70	13



- ✧ Wheel material : PP
- ✧ Ball Bear : 2PCS
- ✧ Wheel Diameter : 50mm / 75mm

NO	Wheel size mm	Plate size mm	Hole to Hole mm	Hole size mm	Radius of Gyration mm	Height mm	Loading KG /PCS
J-50P-1	50 x 38	80.5 x 80.5 x 4	58x58	8.5	79	80	300
J-75P-1	75 x 46	99.5 x 99.5 x 5	72x72	11	100	117	500

Adjuster Level feet (Zinc)



NO	Base plate Diameter mm	Base plate Height mm	Screw size mm	Screw Height mm	Total Height mm	Loading kg
C003-M12-50-39	39	21	M12*P1.75	50	71	300
C003-M12-60-39				60	81	
C003-M12-70-39				70	91	
C003-M12-100-39				100	121	
C003-M12-150-39				150	171	
C003-1/2"-100-39			1/2"---12WT	100	128	
C003-1/2"-150-39				150	178	
C003-M12-50-56	56	28	M12*P1.75	50	78	
C003-M12-60-56				60	88	
C003-M12-70-56				70	98	
C003-M12-100-56				100	128	
C003-M12-150-56				150	178	
C003-M16-100-56		30	M16*P2.0	100	130	500
C003-M16-150-56				150	180	
C003-1/2"-100-56		28	1/2"---12WT	100	128	300
C003-1/2"-150-56				150	178	
C003-5/8"-75-30		30	5/8"---11WT	75	105	500
C003-5/8"-100-56				100	130	
C003-5/8"-150-56				150	180	
C003-M16-100-80	80	30	M16*P2.0T	100	132	500
C003-M16-150-80				150	182	
C003-5/8"-100-80		30	5/8---11WT	100	132	500
C003-5/8"-150-80				150	182	

Adjuster Level feet (Stainless)



NO	Base plate Diameter mm	Base plate Height mm	Screw size mm	Screw Height mm	Total Height mm	Loading kg
S-M12-60	56	28	M12*P1.75	60	88	400
S-M12-75				75	103	
S-M12-100				100	128	
S-M12-150				150	178	
S-M16-75	56	30	M16*P2.0	75	106	500
S-M16-100				100	131	
S-M16-150				150	181	

2513 Nylon Caster

	✧ Wheel size : 25 × 13 mm ✧ Total height : 35 mm ✧ Loading : 10 kg / pcs
---	--

2723 Nylon Caster

	✧ Wheel size : 27 × 23mm ✧ Total height : 47mm ✧ Loading : 40kg / pcs ✧ Ball bearing
--	---