

YXCASTER

| 調整腳輪




韓式調整腳輪

- 輪面材質：尼龍
- 輪子附調整腳座，可調整水平高度
- 適用於精密機械、精密儀器



產品規格

產品編號	直徑 mm  (D)	輪面寬 mm  (W)	底板 尺寸 mm (AxB)	孔距 mm (ExF)	孔徑 mm (d)	旋轉 半徑 mm (G)	總高 mm  (H)	可調整 高度 mm (h)	載重  kg	
									1只	4只
YGD-40F	40	18	55x55	42x42	6.5	50	69	5	50	100
YGD-60F	50	24	73x73	58x58	7	63	83	7	250	500
YGD-80F	62	28	90x90	70x70	9	77	104	15	500	1000
YGD-100F	73	30	95x95	70x70	11	89.5	120	12	750	1500
YGD-120F	73	30	95x95	70x70	11	88	120	12	1000	2000
YGD-150F	98	55	100x100	70x70	13	118	133	15	1500	3000

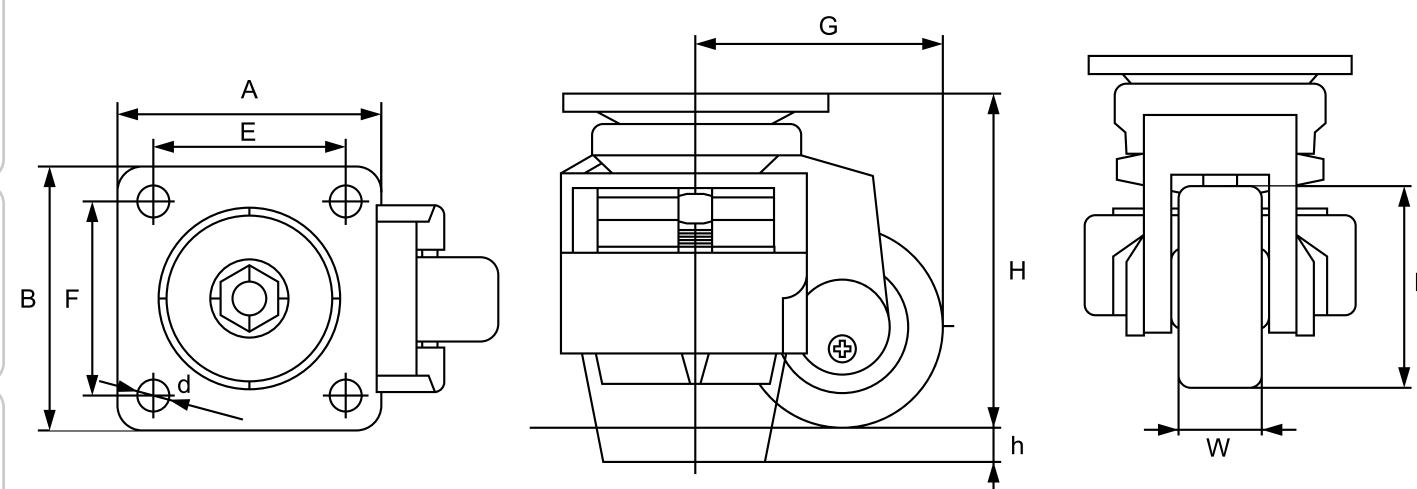

- ✓ RoHS
- ✓ ISO 9001
- ✓ ISO 14001

輕荷

中荷

重荷

超高荷重

不銹鋼輪

調整腳輪

空輪

其他

台車・推車

調整腳

韓式調整腳輪


- 輪面材質：尼龍
- 輪子附調整腳座，可調整水平高度
- 適用於精密機械、精密儀器



✓ RoHS
✓ ISO 9001
✓ ISO 14001

產品規格

產品編號	直徑 mm  (D)	輪面寬 mm  (W)	螺絲規格 (M)	螺絲長度 mm (L)	旋轉 半徑 mm (G)	總高 mm  (H)	可調整 高度 mm (h)	載重 	
								1只	4只
YGD-40S	40	18	M8	10	50	71	5	50	100
YGD-60S	50	24	M12	13	63	83	10	250	500
YGD-80S	62	28	M12	15	77	102	15	500	1000
YGD-100S	73	30	M16	15	89.5	120	12	750	1500
YGD-120S	73	30	M16	15	88	118	12	1000	2000

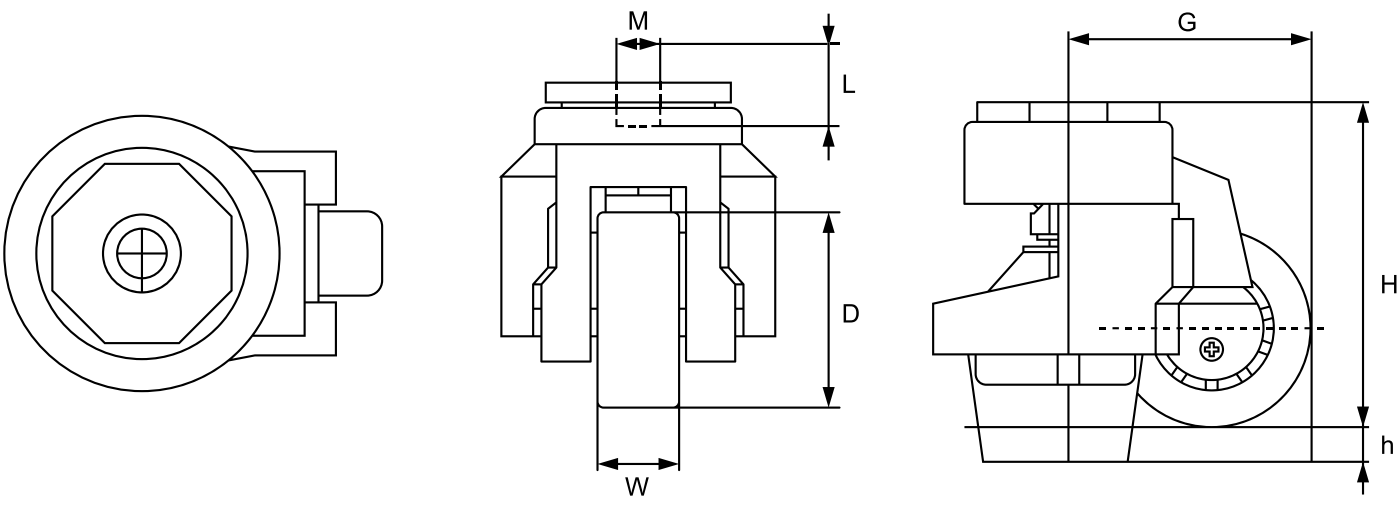

2" / 3" 日式調整腳輪




- 輪面材質：尼龍
- 腳架：鍍鋅
- 輪子附調整腳座，可調整水平高度
- 適用於精密機械、精密儀器



✓ RoHS
✓ ISO 9001
✓ ISO 14001

產品規格

產品編號	直徑 mm  (D)	輪面寬 mm  (W)	底板厚度 mm (T)	底板尺寸 mm (AxB)	孔距 mm (ExF)	孔徑 mm (d)	總高 mm  (H)	單顆 載重 
J-50P	50	38	4.0	80.5 x 80.5	57~63 x 57~63	8.6	80	300
J-75P	75	45	5.5	100 x 100	72x72	11	117	500

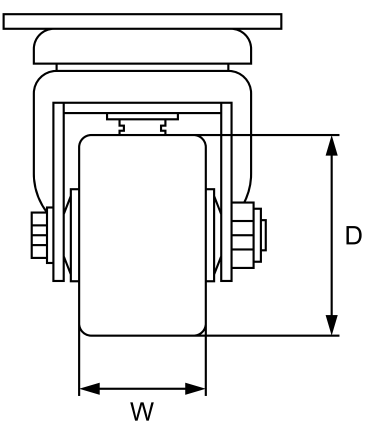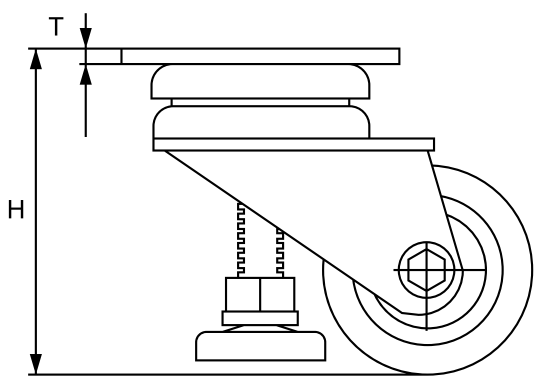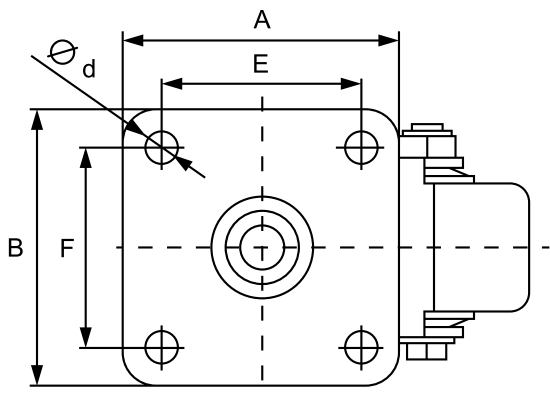

輕荷
中荷
重荷
超高荷重
不銹鋼輪
調整腳輪
空輪
其他
台車・推車
調整腳

48系列 3X2 美式輪+調整腳

- 冠宏輪專利品，設計符合鋁擠型規格
- 輪子轉盤處經熱處理，荷重不易變形
- 輪面多種材質供選擇，符合不同環境需求





RoHS
ISO 9001
ISO 14001

產品規格

活動輪	邊剎車輪	定向輪	材質	直徑 mm	輪寬 mm	單顆載重
48-320PBB12-SW-L	48-320PBB12-SB-L	48-320PBB-RG-L	PP	74	47	250
48-320TBG12-SW-L	48-320TBG12-SW-L	48-320TBGRG-L	TPR			200
48-320NBB12-SW-L	48-320NBB12-SB-L	48-320NBBRG-L	尼龍			250
48-320EBG12-SW-L	48-320EBF12-SB-L	48-320EBF-RG-L	導電TPR			200

底板尺寸 單位:mm

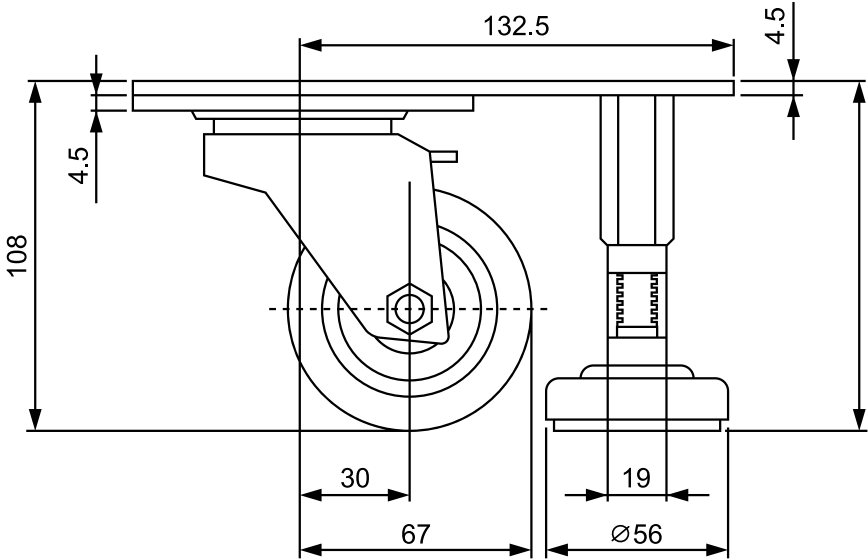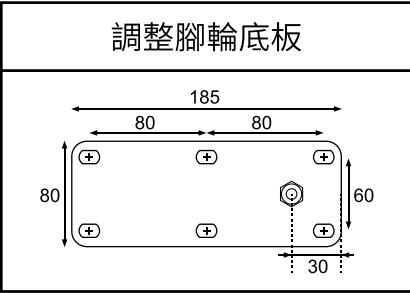

1.5"~10" 高彈性TPR(HTPR) / TPR輪

- 高彈性TPR使用日本母粒製成，硬度Shore A 65 ± 5
- TPR為台灣料，硬度Shore A 85 ± 5



產品規格

直徑 mm	輪寬 mm	材質		軸承 pcs	內徑 mm	活動輪	雙剎車輪	邊剎車輪	定向輪	輪架規格請參考
		高彈性TPR	TPR							
38	22.5	√		2	6.4	√	√		√	P.18
50	20	√	√	X	5.8	√		√	√	P.12
	20	√		2	8	√				P.72
	22.5	√		2	6.4	√	√		√	P.20
61	28.5	√	√	2	8	√	√		√	P.26/P.32
75	22	√	√	1	5.8	√	√			P.22
76	25	√	√	1	8	√	√		√	P.28/P.34
	25		√	X	8	√	√		√	
76	30	√	√	1	9.6 / 8	√	√	√	√	P.46/P.48/P.54
	30	√	√	2	9.6	√	√	√	√	
74	47		√	2	10	√		√	√	P.74

舊式儀器輪請參考P.40/41

輕荷

中荷

重荷

超高荷重

不銹鋼輪

調整腳輪

空輪

其他

台車・推車

調整腳

產品規格

直徑 mm	輪寬 mm	材質		軸承 pcs	內徑 mm	活動輪	雙剎車輪	邊剎車輪	定向輪	輪架規格 請參考
		高彈性 TPR	TPR							
100	25	✓	✓	1	7.2	✓	✓		✓	P.30/P.36
101	31	✓	✓	1	9.6 / 8	✓	✓	✓	✓	P.50/P.56/P.60
100	38	✓	✓	2	17/15/12	✓	✓	✓	✓	P.66/P.68/P.70
	51		✓	2	17	✓	✓	✓	✓	P.76
125	30	✓	✓	1	9.6 / 8	✓	✓	✓	✓	P.52/P.58/P.60
	38	✓	✓	2	17/15/12	✓	✓	✓	✓	P.66/P.68/P.70
	51	✓	✓	2	17	✓	✓	✓	✓	P.76/P.80
150	38	✓	✓	2	17/15/12	✓	✓	✓	✓	P.66/P.68/P.70
	51	✓	✓	2	17	✓	✓	✓	✓	P.78/P.80
201	52	✓	✓	2	17	✓	✓	✓	✓	P.62/P.78/P.80
255	75		✓	2	17	✓			✓	P.63

1"~8" 尼龍輪

• 尼龍輪無彈性耐磨佳，硬度Shore A 85 ± 5



產品規格

直徑 mm	輪寬 mm	軸承 pcs	內徑 mm	活動輪	雙剎車輪	邊剎車輪	定向輪	輪架規格 請參考
25	13	X	4.4	✓			✓	P.11
27	23	2	6.4	✓	✓			P.17
38	23	X	6.4	✓	✓		✓	P.18
50.5	20.8	X	6.4	✓	✓	✓	✓	P.12/P.20
61	25	X	8	✓	✓		✓	P.26/P.32
75	22	X	6.3	✓	✓			P.15/P.22
74.5	25	X	8	✓	✓		✓	P.28/P.34
75	31	X	9.6	✓	✓	✓	✓	P.46/P.48/P.54
74	47	2	10	✓		✓	✓	P.74
100	32	X	9.9	✓	✓	✓	✓	P.50/P.56/P.60
	32	1	9.8	✓	✓	✓	✓	
	38	2	17 / 15 / 12	✓	✓	✓	✓	P.66/P.68/P.70
100	51	2	20	✓	✓	✓	✓	P.76
124	32	X	9.7	✓	✓	✓	✓	P.52/P.58/P.60
125	38	2	17 / 15 / 12	✓	✓	✓	✓	P.66/P.68/P.70
126	51	2	20	✓	✓	✓	✓	P.76
150	38	2	17 / 15 / 12	✓	✓	✓	✓	P.66/P.68/P.70
151	51	2	20	✓	✓	✓	✓	P.78
196	56	2	20	✓	✓	✓	✓	P.78

輕荷

中荷

重荷

超高荷重

不銹鋼輪

調整腳輪

空輪

其他

台車・推車

調整腳

2"~8" PU輪



產品規格

直徑 mm	輪寬 mm	軸承 pcs	內徑 mm	活動輪	雙剎車輪	邊剎車輪	定向輪	輪架規格 請參考
50	20.7	X	6.3	√	√		√	P.20
64	22	X	6.2	√		√		P.14
75	23.5	2	8.1	√	√		√	P.28/P.34
76	31	1	9.6 / 8	√	√	√	√	P.46/P.48/P.54
	31	2	9.6	√	√	√	√	
101	31	1	9.6 / 8	√	√	√	√	P.50/P.56/P.60
100	47 (鋁框)	2	15	√	√	√	√	P.76/P.80
125	30	1	9.6	√	√	√	√	P.52/P.58/P.60
	47 (鋁框)	2	15	√	√	√	√	P.76/P.80
126	51 (銑製)	2	20	√	√	√	√	P.76
150	47 (鋁框)	2	15	√	√	√	√	P.78/P.80
	51 (銑製)	2	20	√	√	√	√	P.78
198	47 (鋁框)	2	15	√	√	√	√	P.78/P.80
	56 (銑製)	2	20	√	√	√	√	P.78

舊式儀器輪請參考P.40/41

2"~5" PP輪



產品規格

直徑 mm	輪寬 mm	軸承 pcs	內徑 mm	活動輪	雙剎車輪	邊剎車輪	定向輪	輪架規格 請參考
50	20.5	X	6.4	√	√		√	P.12/P.20
64	22	X	6.3	√		√		P.14
61	25	X	8	√	√		√	P.26/P.32
75	22	1	6	√	√			P.22
	22	X	6.3	√	√	√		P.15/P.22
74.5	25	X	8	√	√		√	P.28/P.34
75	32	X	9.8	√	√	√	√	P.46/P.48/P.54
74	47	2	10	√			√	P.74
101	31	1	9.6	√	√	√	√	P.50/P.56/P.60
100	32	X	9.9	√	√	√	√	P.50/P.56/P.60
	32	1	9.8	√	√	√	√	
125	30	1	9.7	√	√	√	√	P.52/P.58/P.60

輕荷

中荷

重荷

超高荷重

不銹鋼輪

調整腳輪

空輪

其他

台車・推車

調整腳

PVC輪



產品規格

直徑 mm	輪寬 mm	軸承 pcs	內徑 mm	活動輪	雙剎車輪	邊剎車輪	定向輪	輪架規格 請參考
50	22	2	6	✓	✓		✓	P.20
75	22	X	6.1	✓	✓	✓		P.15/P.22
75	25	X	8.2	✓		✓		P.25

橡膠輪



產品規格


直徑 mm	輪寬 mm	軸承 pcs	內徑 mm	活動輪	雙剎車輪	邊剎車輪	定向輪	輪架規格 請參考
49.5	20.5	X	6.5	✓		✓	✓	P.12
100	25	X	8.1	✓	✓		✓	P.30/P.36

舊式儀器輪請參考P.40/P.41

1.5”~6” 耐高溫輪

✓ RoHS
✓ ISO 9001
✓ ISO 14001

- 輪面材質：耐高溫尼龍製成
- 輪面顏色：咖啡色或黑色
- 耐溫：高溫可達攝氏200度
- 輪架可選擇鍍鋅腳架或白鐵腳架

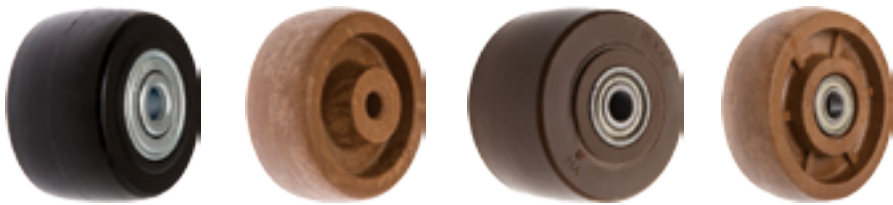

產品規格

直徑 mm	輪寬 mm	軸承 pcs	內徑 mm	咖啡色	黑色	活動輪	雙剎車輪	邊剎車輪	定向輪	輪架規格 請參考	
										鍍鋅	不鏽鋼
38	23	2	6		✓	✓			✓	P.18	P.88
75	32	X	9.7	✓	✓	✓	✓	✓	✓	P.48	P.91
100	32	X	9.7	✓	✓	✓	✓	✓	✓	P.50	P.91
125	32	X	9.7	✓		✓	✓	✓	✓	P.52	P.91
74	47	2	10	✓	✓	✓		✓	✓	P.74	X
100	51	2	20	✓		✓	✓	✓	✓	P.76	P.92
126	51	2	20	✓	✓	✓	✓	✓	✓	P.76	P.92
150	51	2	20	✓	✓	✓	✓	✓	✓	P.78	P.92

輕荷

中荷

重荷

超高荷重

不銹鋼輪

調整腳輪

空輪

其他

台車・推車

調整腳

2"~8" 導電輪

- 材質：導電TPR或導電尼龍，不含碳黑成分，使用不留黑痕
- 輪面顏色：深灰色
- 導電輪阻抗值：10e4-10e6Ω
- 導電性：靜放時永久導電，輪子為消耗品，依使用情況而定
- 輪面硬度：Shore A 90 ± 5
- 輪面清潔：可使用75%酒精，以紗布或乾淨濕布擦拭輪面
- 應用：電子廠、機器設備、無塵室



216 mm

- ✓ RoHS
- ✓ ISO 9001
- ✓ ISO 14001

產品規格

直徑 mm	輪寬 mm	材質	軸承 pcs	內徑 mm	活動 輪	雙 刹 車 輪	邊 刹 車 輪	定 向 輪	輪架規格 請參考
50	22.5	導電TPR	2	6	✓	✓		✓	P.20
75	22		1	6	✓	✓			P.22
75	25		1	8	✓	✓		✓	P.28/P.34
100	25		1	8	✓	✓		✓	P.30/P.36
76	30		1	9.7 or 8	✓	✓	✓	✓	P.46/P.48/P.54
101	31		1		✓	✓	✓	✓	P.50/P.56/P.60
125	30		1		✓	✓	✓	✓	P.52/P.58/P.60
100	38		2	15	✓	✓	✓	✓	P.66/P.68/P.70
125	38		2	15	✓	✓	✓	✓	P.66/P.68/P.70
150	38		2	17	✓	✓	✓	✓	P.66/P.68/P.70
74	47	導電TPR / 導電尼龍	2	10	✓		✓	✓	P.74
126	51		2	17/20	✓	✓	✓	✓	P.76
150	51		2	17/20	✓	✓	✓	✓	P.78
201	52	導電TPR	2	20	✓	✓	✓	✓	P.78

PU拖板車輪

- 台灣製拖板車輪，使用聚醚PU料
- 內含兩顆6204軸承



產品規格

直徑 mm	輪寬 mm	軸承 pcs	內徑 mm
70	70	2	20
80	60	2	20
80	70	2	20
80	85	2	20
80	90	2	20
85	85	2	20
180	50	2	20

輕荷

中荷

重荷

超高荷重

不銹鋼輪

調整腳輪

空輪

其他

台車・推車

調整腳