

Star Light Technology Group(China)Limited

Website: www.starlight-led.com

Email: karous@starlight-led.com

Address: 3&4/F Starlight Industry Buiding,Starlight Hi-Tech Park,Tiegang Village, Xixiang Town,Bao'an District,Shenzhen City,Guangdong Province, China

Tel: +86 755 29443811 Cellphone and whatsapp: +86 180 9894 5330 Skype: karous.starlight

Star Light Technology Group(China)Limited

Star Light

www.starlight-led.com



Flood light/Low Bay/High Bay lighting solutions

- 30w-4000w Innovative custom lighting solutions
- The most steady & brightest led lighting solutions
- Worked as flood light/low bay/high bay applications
- 5 Years Warranty for 10 years using applications



Starlight Technology Group(China)Limited was established by a team of dynamic, creative and experienced engineers whose main and ultimate goal is to put new technology of LED lighting into production with highly competitive pricing, the shortest possible time and with highest quality. Starlight Group brings more than 15 years of professional experience in lighting developments and services.

Starlight Group's products are manufactured according to international standards, offering wide range of LED products from indoor to outdoor illumination, and most of the products are widely used in, architecture, landscape, and city lighting projects. In addition, we have a strict quality inspection system to ensure our worldwide customers the fastest and highest quality service, we are continuously devoted to improve the quality of LED products and is focused on cost effective energy saving illumination solutions in both white and color changeable products.



CE Certified



FCC Certified



RoHS Certified



Highest Quality



Optimal Performance



Eco-Friendly & Energy-Saving



Flood light/Low Bay/High Bay lighting solutions

- 30w-4000w Innovative custom lighting solutions
- The most steady & brightest led lighting solutions
- Worked as flood light/low bay/high bay applications
- 5 Years W artranty for 10 years using applications




New


Model No.	SL-FL010X-XX/100W
Input Voltage	V1:86-265V / V2:90-305V / V3: 480V
Nominal Power	100W
LED Maintain Flux	15000lm±5% (Ta=25°C)
Optional Color Temp.	3000-3500K /4000-5500K /5000-6500K
Beam Angle available:	.10°, 24°, 38°, 60°,90°
Fixture Material	Aluminum
Luminaire IP Rating	IP65
Guarantee	5 years
Packing Info.	355*440*170mm, 5.8kg, 1 unit /ctn.

Spec.

Product Dimension(mm)

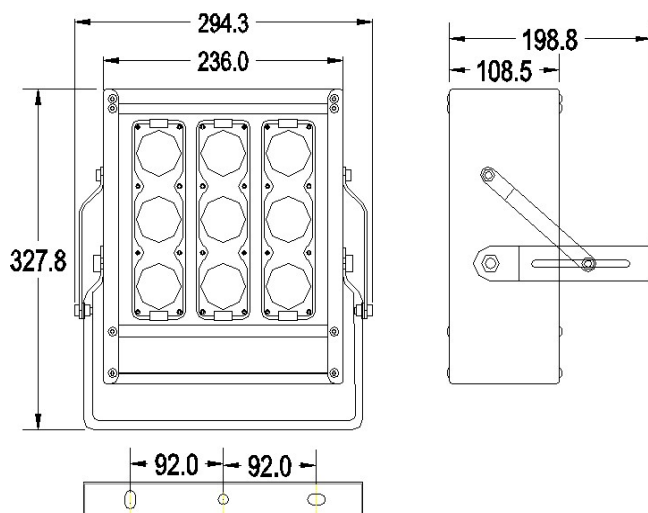

ISO-Illuminance Curve

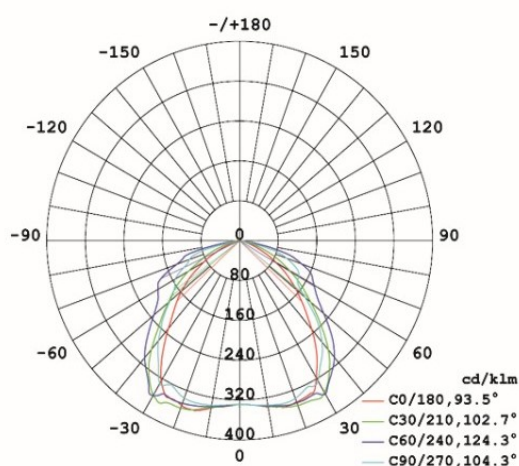

Flood light/Low Bay/High Bay lighting solutions

- 30w-4000w Innovative custom lighting solutions
- The most steady & brightest led lighting solutions
- Worked as flood light/low bay/high bay applications
- 5 Years W artranty for 10 years using applications

Spec.


Model No.	SL-FL012X-XX/120W
Input Voltage	V1:85-265V V2:90-305V V3:480V
Nominal Power	120W
LED Maintain Flux	18000lm±5% (Ta=25°C)
Optional Color Temp.	3000-3500K /4000-5500K /5000-6500K
Beam Angle available:	.10°, 24°, 38°, 60°,90°
Fixture Material	Aluminum
Luminaire IP Rating	IP65
Guarantee	5 years
Packing Info.	400*440*170mm, 6.8kg, 1 unit /ctn.




New



Product Dimension(mm)

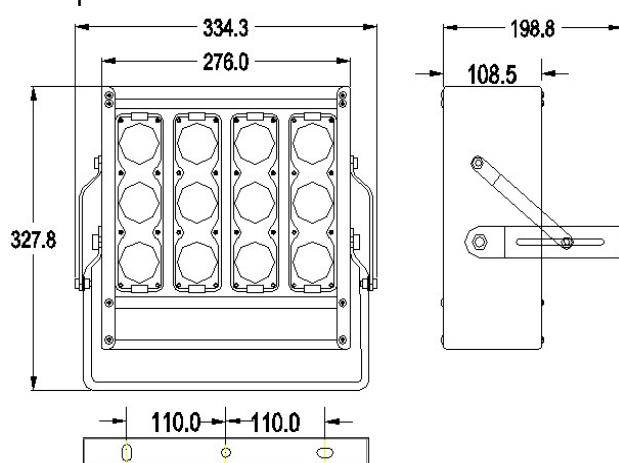

ISO-Illuminance Curve

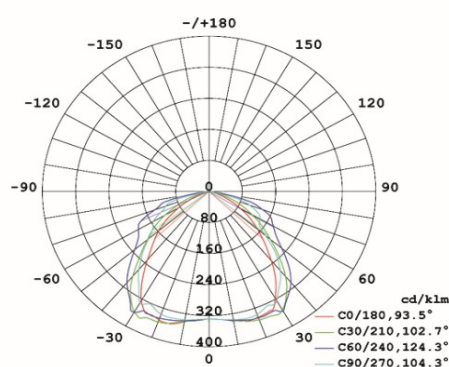


Flood light/Low Bay/High Bay lighting solutions

- 30w-4000w Innovative custom lighting solutions
- The most steady & brightest led lighting solutions
- Worked as flood light/low bay/high bay applications
- 5 Years W artranty for 10 years using applications




New

ISO-Illuminance Curve

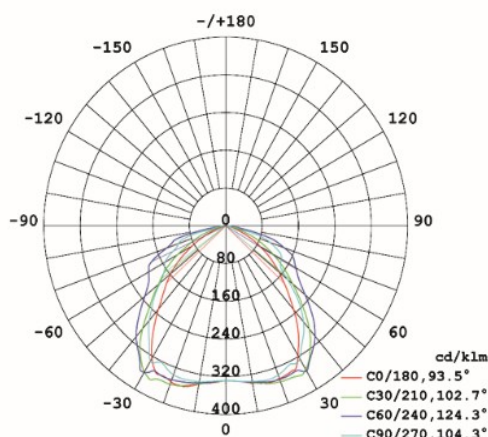

Model No.	SL-FL015X-XX/150W
Input Voltage	V1:85-265V V2:90-305V V3: 480V
Nominal Power	150W
LED Maintain Flux	22500lm \pm 5% (Ta=25°C)
Optional Color Temp.	3000-3500K /4000-5500K /5000-6500K
Beam Angle available:	10°, 24°, 38°, 60°,90°
Fixture Material	Aluminum
Luminaire IP Rating	IP65
Guarantee	5 years
Packing Info.	460*440*170mm, 7.8kg 1 unit /ctn.

Product Dimension(mm)

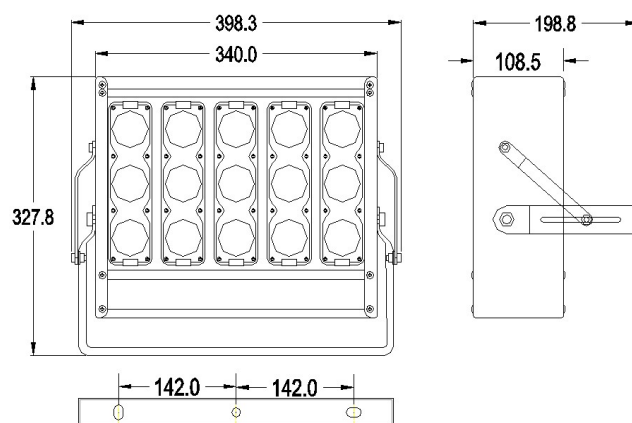

Flood light/Low Bay/High Bay lighting solutions

- 30w-4000w Innovative custom lighting solutions
- The most steady & brightest led lighting solutions
- Worked as flood light/low bay/high bay applications
- 5 Years Warranty for 10 years using applications

Spec.


Model No.	SL-FL020X-XX/200W
Input Voltage	V1: 85-265V V2:90-305V V3:480V
Nominal Power	200W
LED Maintain Flux	30,000lm±5% (Ta=25°C)
Optional Color Temp.	3000-3500K /4000-5500K /5000-6500K
Beam Angle available:	10°, 24°, 38°, 60°, 90°
Fixture Material	Aluminum
Luminaire IP Rating	IP65
Guarantee	5 years
Packing Info.	523*440*170mm, 9kg 1 unit /ctn.




New



Product Dimension(mm)

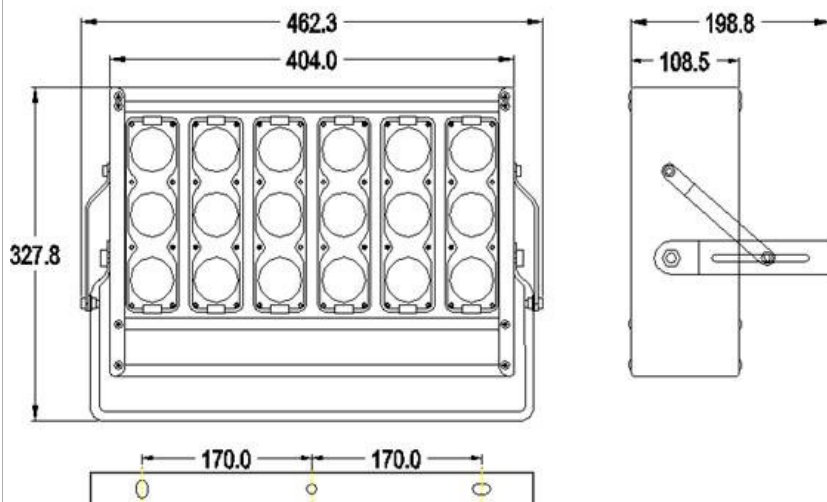

ISO-Illuminance Curve

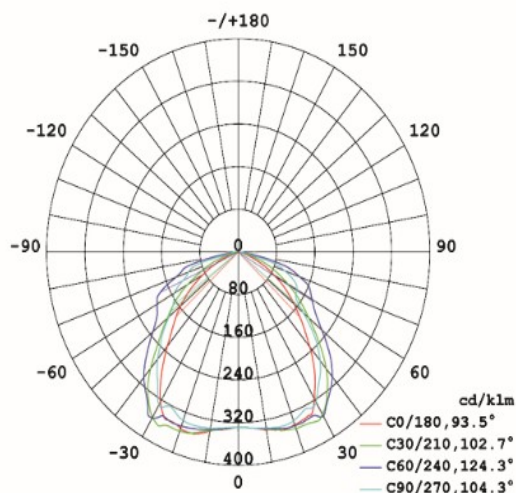

Flood light/Low Bay/High Bay lighting solutions

- 30w-4000w Innovative custom lighting solutions
- The most steady & brightest led lighting solutions
- Worked as flood light/low bay/high bay applications
- 5 Years W artranty for 10 years using applications



New





Spec.

Model No.	SL-FL025X-XX/250W
Input Voltage	V1:85-265V V2:90-305V V3: 480V
Nominal Power	250W
LED Maintain Flux	37.500lm±5% (Ta=25°C)
Optional Color Temp.	3000-3500K /4000-5500K /5000-6500K
Beam Angle available:	10°, 24°, 38°, 60°,90°
Fixture Material	Aluminum
Luminaire IP Rating	IP65
Guarantee	5 years
Packing Info.	651*440*170mm, 12.8kg 1 unit /ctn.

Product Dimension(mm)

ISO-Illuminance Curve

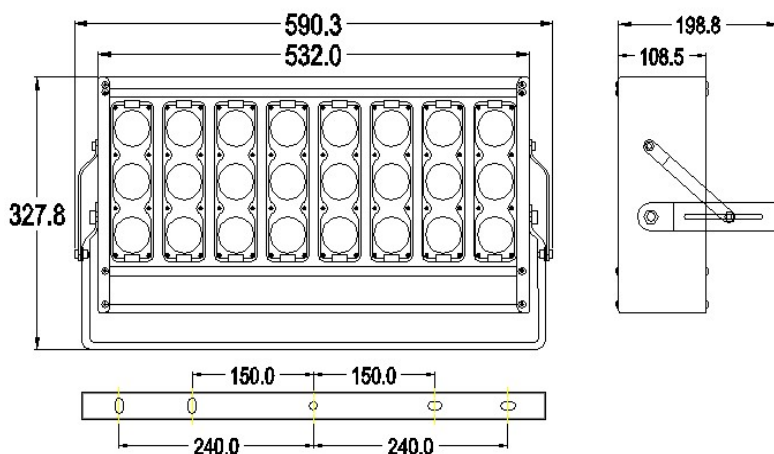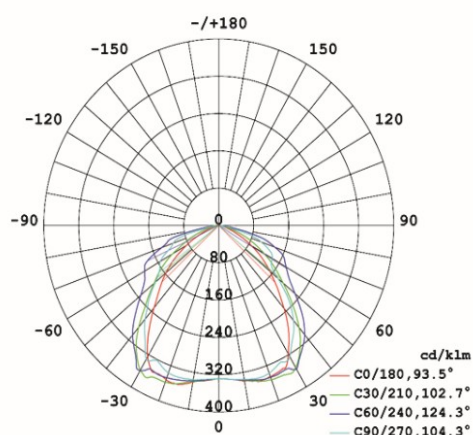

Flood light/Low Bay/High Bay lighting solutions


- 30w-4000w Innovative custom lighting solutions
- The most steady & brightest led lighting solutions
- Worked as flood light/low bay/high bay applications
- 5 Years Warranty for 10 years using applications

Model No.	SL-FL030X-XX/300W
Input Voltage	V1:85-265V V2:90-305V V3: 480V
Nominal Power	300W
LED Maintain Flux	45,000lm±5% (Ta=25°C)
Optional Color Temp.	3000-3500K /4000-5500K /5000-6500K
Beam Angle available:	10°, 24°, 38°, 60°, 90°
Fixture Material	Aluminum
Luminaire IP Rating	IP65
Guarantee	5 years
Packing Info.	400*600*275mm, 20kg 1 unit /ctn.




New

Product Dimension(mm)

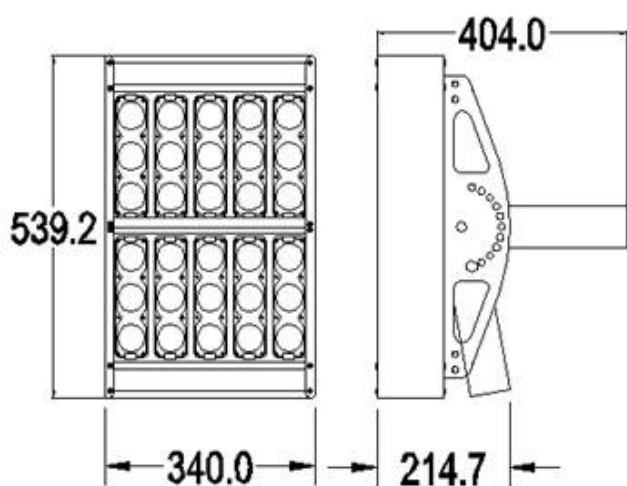

ISO-Illuminance Curve

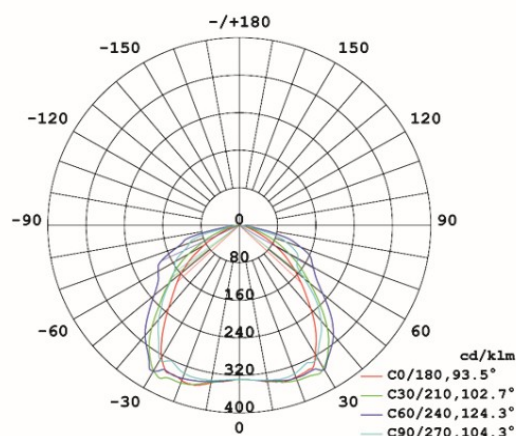

Flood light/Low Bay/High Bay lighting solutions

- 30w-4000w Innovative custom lighting solutions
- The most steady & brightest led lighting solutions
- Worked as flood light/low bay/high bay applications
- 5 Years W artranty for 10 years using applications




New


Spec.

Model No.	SL-FL035X-XX/350W
Input Voltage	V1:85-265V V2:90-305V V3: 480V
Nominal Power	350W
LED Maintain Flux	52,500lm±5% (Ta=25°C)
Optional Color Temp.	3000-3500K /4000-5500K /5000-6500K
Beam Angle available:	10°, 24°, 38°, 60°,90°
Fixture Material	Aluminum
Luminaire IP Rating	IP65
Guarantee	5 years
Packing Info.	464*600*275mm, 21kg 1 unit /ctn.

ISO-Illuminance Curve

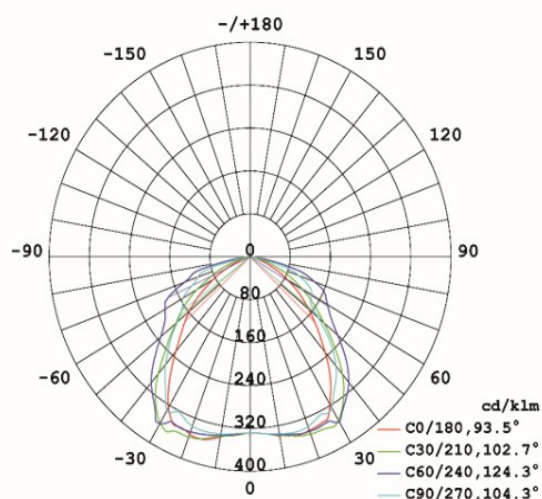

Product Dimension(mm)

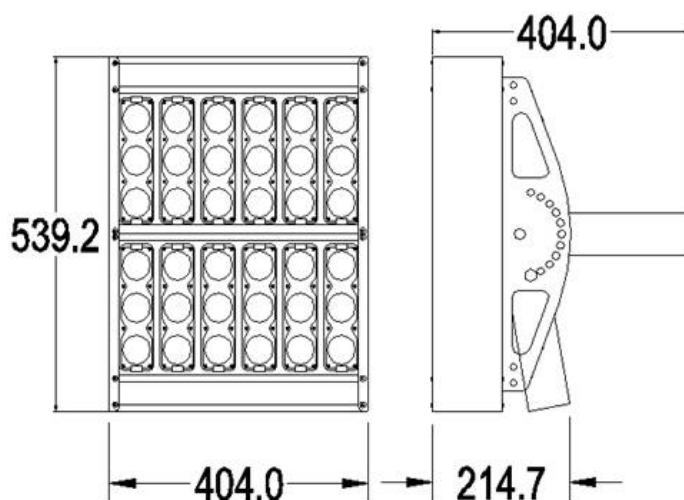

Flood light/Low Bay/High Bay lighting solutions


- 30w-4000w Innovative custom lighting solutions
- The most steady & brightest led lighting solutions
- Worked as flood light/low bay/high bay applications
- 5 Years Warranty for 10 years using applications

Model No.	SL-FL040X-XX/400W
Input Voltage	V1:85-265V V2:90-305V V3: 480V
Nominal Power	400W
LED Maintain Flux	60,000lm±5% (Ta=25°C)
Optional Color Temp.	3000-3500K /4000-5500K /5000-6500K
Beam Angle available:	10°, 24°, 38°, 60°, 90°
Fixture Material	Aluminum
Luminaire IP Rating	IP65
Guarantee	5 years
Packing Info.	530*600*275mm, 23kg 1 unit /ctn.




New

ISO-Illuminance Curve

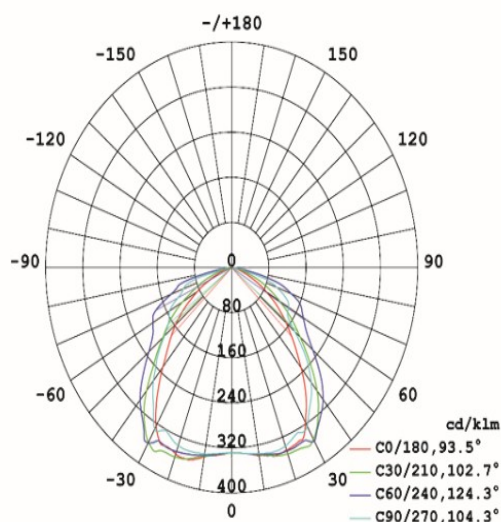

Product Dimension(mm)

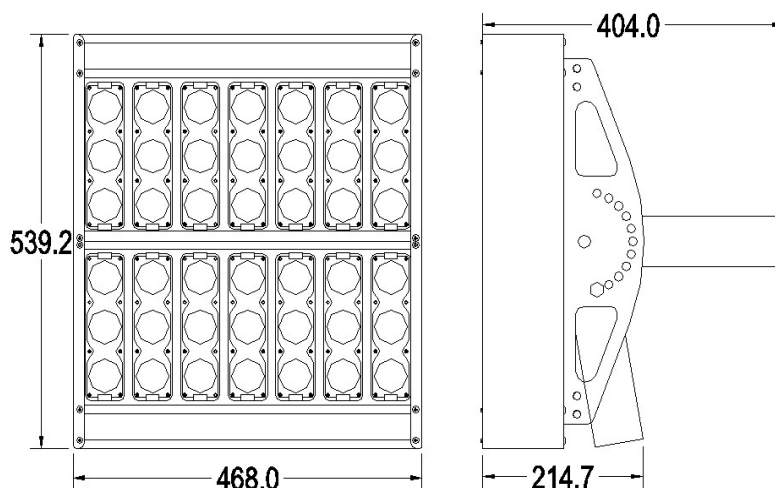


Flood light/Low Bay/High Bay lighting solutions

- 30w-4000w Innovative custom lighting solutions
- The most steady & brightest led lighting solutions
- Worked as flood light/low bay/high bay applications
- 5 Years Warranty for 10 years using applications


Model No.	SL-FL050X-XX/500W
Input Voltage	V1:85-265V V2:90-305V V3: 480V
Nominal Power	500W
LED Maintain Flux	75,000lm±5% (Ta=25°C)
Optional Color Temp.	3000-3500K /4000-5500K /5000-6500K
Beam Angle available:	10°, 24°, 38°, 60°, 90°
Fixture Material	Aluminum
Luminaire IP Rating	IP65
Guarantee	5 years
Packing Info.	592*600*275mm, 28.5kg 1 unit /ctn.



ISO-Illuminance Curve

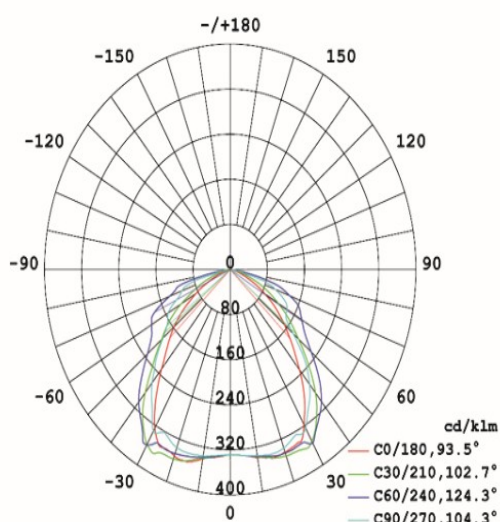

Product Dimension(mm)

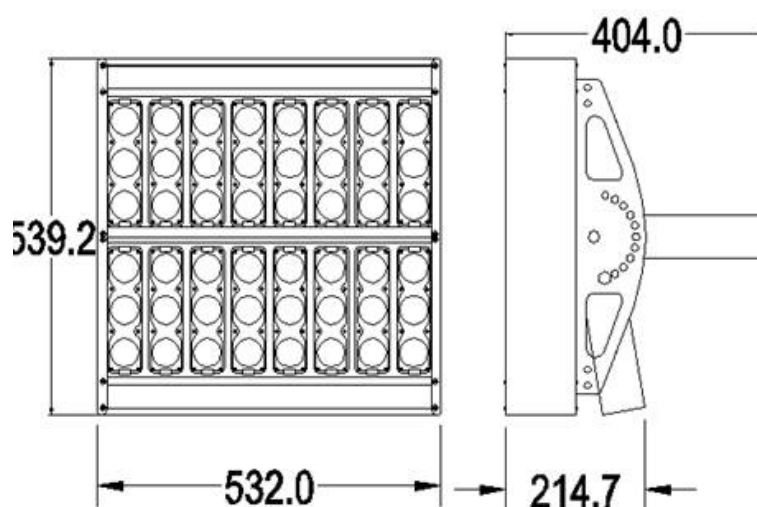

Flood light/Low Bay/High Bay lighting solutions

- 30w-4000w Innovative custom lighting solutions
- The most steady & brightest led lighting solutions
- Worked as flood light/low bay/high bay applications
- 5 Years W artranty for 10 years using applications




New

Spec.




ISO-Illuminance Curve

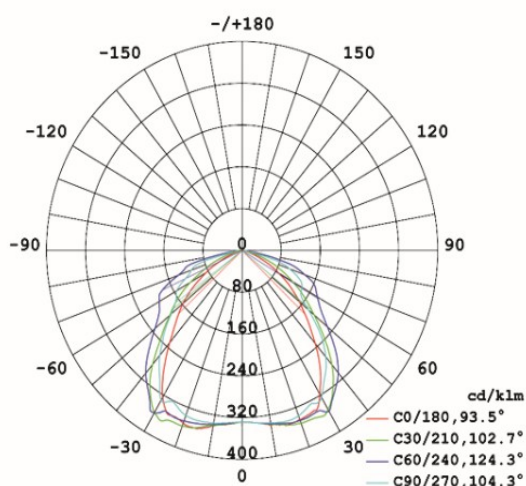

Model No.	SL-FL060X-XX/600W
Input Voltage	V1:85-265V V2:90-305V V3: 480V
Nominal Power	600W
LED Maintain Flux	90,000lm±5% (Ta=25°C)
Optional Color Temp.	3000-3500K /4000-5500K /5000-6500K
Beam Angle available:	10°, 24°, 38°, 60°,90°
Fixture Material	Aluminum
Luminaire IP Rating	IP65
Guarantee	5 years
Packing Info.	592*720*275mm, 29kg 1 unit /ctn.

Product Dimension (mm)

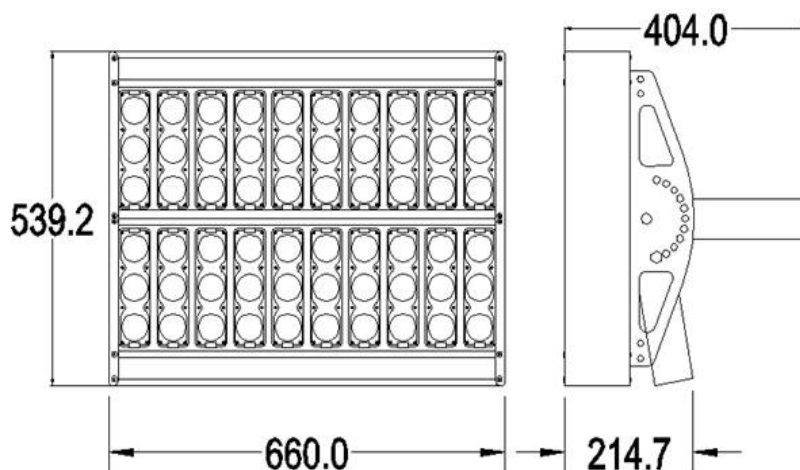


Flood light/Low Bay/High Bay lighting solutions

- 30w-4000w Innovative custom lighting solutions
- The most steady & brightest led lighting solutions
- Worked as flood light/low bay/high bay applications
- 5 Years Warranty for 10 years using applications



Model No.	SL-FL070X-XX/700W
Input Voltage	V1:85-265V V2:90-305V V3: 480V
Nominal Power	700W
LED Maintain Flux	105.000lm±5% (Ta=25°C)
Optional Color Temp.	3000-3500K /4000-5500K /5000-6500K
Beam Angle available:	10°, 24°, 38°, 60°,90°
Fixture Material	Aluminum
Luminaire IP Rating	IP65
Guarantee	5 years
Packing Info.	920*640*320mm, 34kg 1 unit /ctn.



ISO-Illuminance Curve

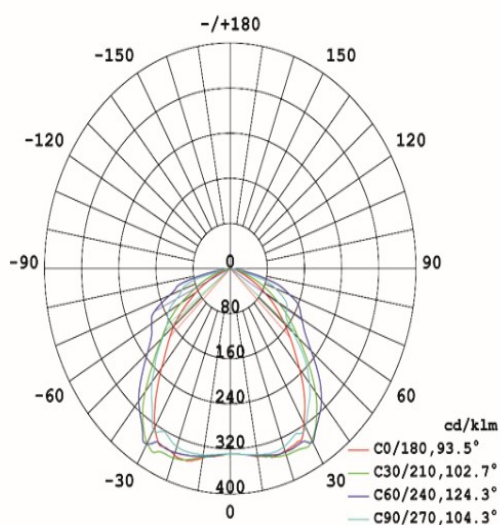

Product Dimension(mm)

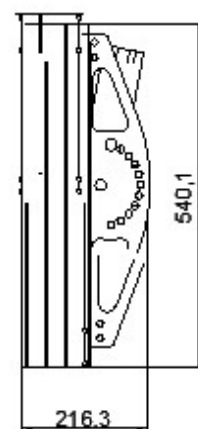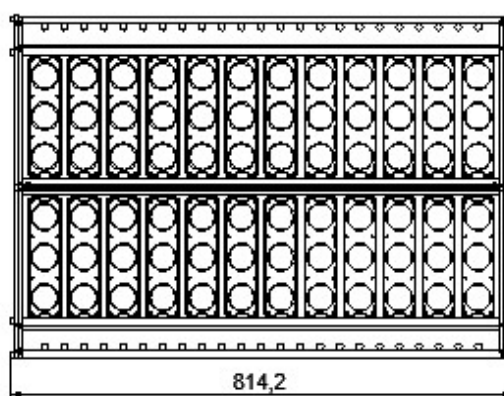

Flood light/Low Bay/High Bay lighting solutions

- 30w-4000w Innovative custom lighting solutions
- The most steady & brightest led lighting solutions
- Worked as flood light/low bay/high bay applications
- 5 Years Warranty for 10 years using applications




New


Spec.

Model No.	SL-FL080X-XX/800W
Input Voltage	V1:85-265V V2:90-305V V3: 480V
Nominal Power	800W
LED Maintain Flux	120,000lm±5% (Ta=25°C)
Optional Color Temp.	3000-3500K /4000-5500K /5000-6500K
Beam Angle available:	10°, 24°, 38°, 60°,90°
Fixture Material	Aluminum
Luminaire IP Rating	IP65
Guarantee	5 years
Packing Info.	105*640*320mm, 38.5kg 1 unit /ctn.

ISO-Illuminance Curve

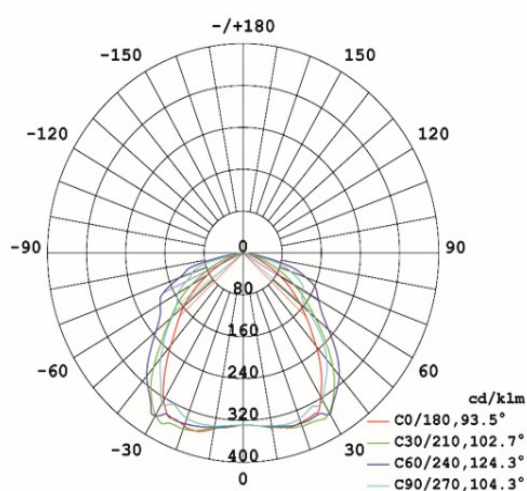

Product Dimension(mm)

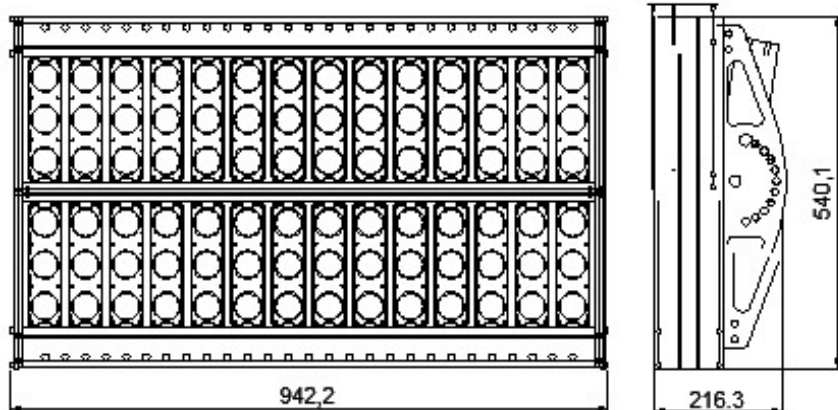

Flood light/Low Bay/High Bay lighting solutions

- 30w-4000w Innovative custom lighting solutions
- The most steady & brightest led lighting solutions
- Worked as flood light/low bay/high bay applications
- 5 Years Warranty for 10 years using applications


Model No.	SL-FL090X-XX/900W
Input Voltage	V1:85-
Nominal Power	900W
LED Maintain Flux	135,000lm
Optional	3000-3500K /4000-5500K /5000-6500K
Beam	10°, 24°, 38°, 60°, 90°
Fixture Material	Aluminum
Luminaire IP Rating	IP65
Guarantee	5 years
Packing Info.	1170*640*320mm, 42.5kg 1 unit /ctn.




New



ISO-Illuminance Curve

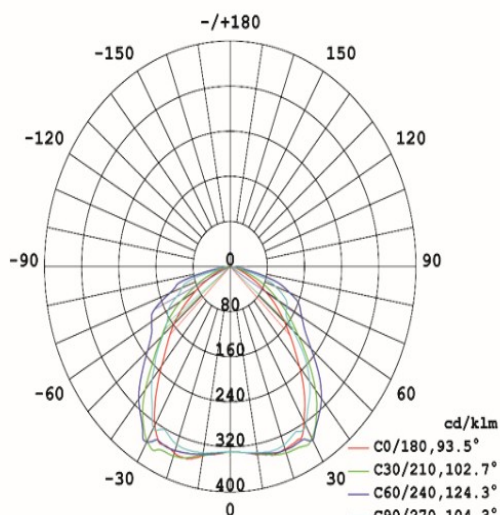

Product Dimension(mm)

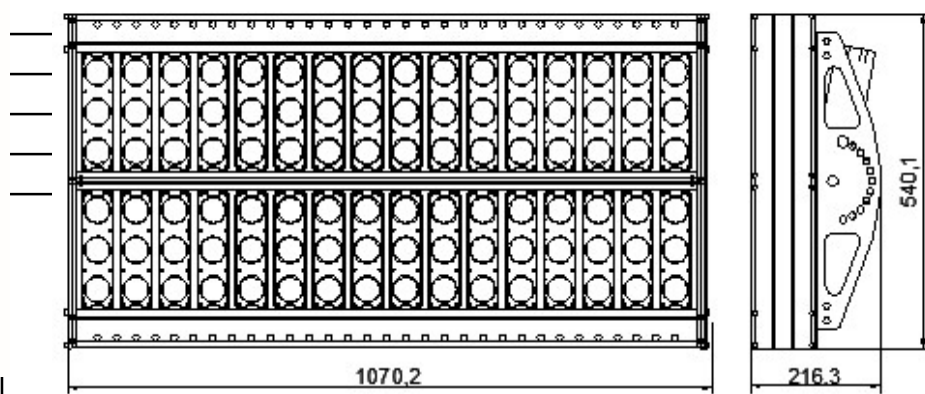

Flood light/Low Bay/High Bay lighting solutions

- 30w-4000w Innovative custom lighting solutions
- The most steady & brightest led lighting solutions
- Worked as flood light/low bay/high bay applications
- 5 Years Warranty for 10 years using applications



New

Model No.	SL-FL100X-XX/1000W
Nominal Power	1000W
LED Maintain Flux	150,000lm±5% (Ta=25°C)
Optional Color Temp.	3000-3500K /4000-5500K /5000-6500K
Beam Angle available:	10°, 24°, 38°, 60°, 90°
Fixture Material	Aluminum and Reinforced Glass
Luminaire IP Rating	IP65
Guarantee	5 years
Packing Info.	1230*640*320mm, 44.5kg 1 unit /ctn.

Warranty 5 Years Warranty Since the Date of Purchase

LED Chip Brand Philips Luxeon T Series TOP Level Chip

LED Drive Power MeanWell HLG Series TOP Level Driver

Product Dimension(mm)

ISO-Illuminance Curve

