



Star Light Technology Group(China)Limited

Address 3&4/F Star Light Industry Building, Starlight Hi-Tech Park, Xixiang Town,Bao'an District, Shenzhen City PRC

Email karous@starlight-led.com Skype No. Karous.starlight www.starlight-led.com Tele: 86 135 1065 4911

T5Tube Specification

Split type T5tube (Include single tube and shelf)



Applications

- ▣ Office Buildings
- ▣ Storage Facilities
- ▣ Retail Stores
- ▣ Supermarkets
- ▣ Residential
- ▣ Hotels
- ▣ Restaurants
- ▣ Warehouses
- ▣ Parking Lots
- ▣ Churches
- ▣ General Lighting
- ▣ Hospitals
- ▣ Shopping Malls
- ▣ Exhibition Halls

Item No.

Watts

International standard

**1st generation LED T5tube**

100-125lum/W

Length and diameter (Include the shelf's length)

T5Tube-001C

4W±1

300mm\*Φ16mm

T5Tube-002C

8W±1

600mm\*Φ16mm

T5Tube-003C

12W±1

900mm\*Φ16mm

T5Tube-004C

16W±1

1200mm\*Φ16mm (Single tube is 1163mm)

T5Tube-005C

20W±1

1500mm\*Φ16mm

Lighting Specification

LED Chip Type: SMD

Voltage Input: 100-277VAC

Light Efficacy:94.44 lm/W(FR)

Color Rendering Index (CRI):80

Available Color Temperatures

Technical Parameters

Dimmable : No


Beam Angel: 140°

Rated Life: 40,000+hours

Power factor:> 0.92

Driver Efficiency:> 90%

Total Harmonic Distortion(THD):12%

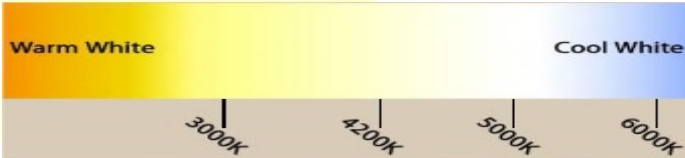

Can not connect with each other between 2 split type t5tube

