

## Products Page 1



### Product Name :

Toroidal Core Transformer

### Product Features :

Type	Rate Power	Approvals
DLR1260	12V - 60VA	UL, cUL, TUV
DLR1280	12V - 80VA	UL, cUL, TUV
DLR12105	12V - 105VA	UL, cUL, TUV
DLR12150	12V - 150VA	UL, cUL, TUV
DLR12200	12V - 200VA	UL, cUL, TUV
DLR12250	12V - 250VA	TUV
DLR12300	12V - 300VA	UL, cUL
DLR12380	12V - 380VA	UL, cUL
DLR12500	12V/24V - 500VA	UL, cUL
DLR12600	12V/24V - 600VA	UL, cUL

### Approvals:

#### UL:

UL1012, 50VA to 600VA  
(File no. E202419)

#### TUV:

EN61558, 60VA to 250VA

### Protection Index:

IP00

### Class of insulation system:

A, E

### Test Voltage:

4000V 2MA 50Hz

**Short Circuit Protection:**

- | Fail safety transformer thermal cutoff.
- | Non-short-circuit-proof. Thermostat.

**Features:**

- | High output power with low space requirement
- | Low profile allows exceptional design versatility
- | Very low magnetic field radiation, therefore ideally suitable for audio, video and measuring equipment.
- | High quality grain-oriented core material without any air gaps creates a higher current at switch on than other conventional transformers.
- | Easy to install using a fixing kit of two insulating disc one metal plate and a bolt.
- | Supplied with mounting kit.
- | Also available within filed center hole.



**Product Name :**

Debuzzing Coil

**Product Features :**

**Inductance :**

11.0 milliHenries @60Hz

**Current :**

2.5A

**Frequency :**

60Hz

**Leads Wire :**

UL Silicone coated #3135  
16AWG rated 600V 200 degree

**Coil material :**

Micro Metals Toroid Core.

**Features :**

- | Can be used for 300W toroidal core transformer to reduce noise.
- | Other inductance and current can be revised upon request.

## Products Page 1



**Product Name :**

UI-Laminated Lighting Transformer

**Product Features :**

**Model:**

DL-072

**Approvals:**

TUV: EN61558

**Input:**

230V 50Hz

**Output:**

12V 50W / 9V 35W

**Protection Index:**

IP00

**Class of insulation system:**

E

**Test Voltage:**

4000V 1MA 50Hz

**Features:**

- | Mechanically protected winding wire in coil bobbin by covered.
- | Easy to install.
- | Compact dimensions. Extra thin. Thickness <= 40mm.



**Product Name :**  
EI-Laminated Lighting Transformer

**Product Features :**

Model	Core Size	Rate Power	Approvals
OM48-12-0830AF	EI-48x24	12V 10VA	UL, cUL, TUV
OM48-120-1600AF	EI-48x30	12V 20VA	UL, cUL, TUV
OM57-120-1600AF	EI-57x30	12V 35VA	UL, cUL, TUV
DL-114	EI-60x21	12V 20VA	TUV
DL-128	EI-66x36	9V 35VA /12V 50VA	UL, cUL, TUV, ITS Bauart, Semko
DL-129	EI-66x36	9V 35VA /12V 50VA	UL, cUL, TUV, ITS Bauart, Semko
OM66-120-6666AF	EI-66x45	12V 80VA	TUV
DL-...-..	EI-66x36	6V - 36V,35VA - 60VA	ITS Bauart, Semko, Nordic
DL76-1220	EI-76x12Extra thin <= 26mm	12V 20VA	TUV
DL-156P	EI-76x20	9V 35VA /12V 50VA	TUV
DL-156S	EI-76x20	9V 35VA /12V 50VA	TUV
DL-156-40	EI-76x20	12V 40VA	TUV
DL-158	EI-86x32	12V 80VA	TUV
DL-136-PS	EI-86x36	12V 105VA	TUV
DL-150	EI-86x43	12V 150VA	TUV




**Product Name :**

EI- Series Power Transformer

**Product Features :**

Core Size	Rate Power	Approvals
EI-28	0.5VA - 2VA	UL, cUL
EI-35	1VA - 4VA	UL, cUL
EI-41	3VA - 10VA	UL, cUL, CCEE
EI-48	7VA - 22VA	UL, cUL, CCEE
EI-54	10VA - 28VA	UL, cUL
EI-57	15VA - 40VA	UL, cUL, CCEE, TUV
EI-60	15VA - 40VA	TUV
EI-66	25VA - 80VA	UL, cUL, CCEE, TUV
EI-76.2	45VA - 105VA	UL, cUL, TUV
EI-86.2	70VA - 150VA	TUV
EI-96	100VA - 300VA	.
EI-114	250VA - 500VA	.
EI-133.2	400VA - 1000VA	.

## Products Page 1

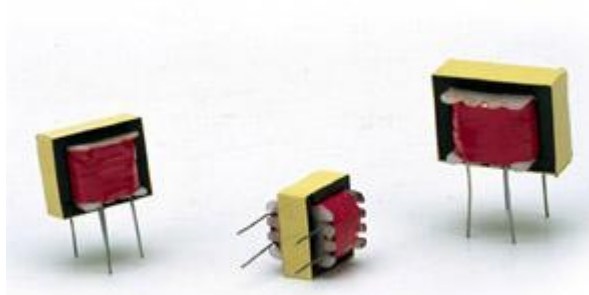


**Product Name :**  
Audio Transformers

**Product Features :**

EI - 14-00240	2.5K	500
EI - 14-221	2.0K	2K
EI - 16-007	3.0K	3K
EI - 16-008	190K	8
EI - 19-00230	1K	1K
EI - 19-00332	60	8
EI - 24-817	35	8
EI - 28 x 11A	400	8
EI - 28 x 11B	690	8

[<< Previous page](#) | [1](#) | [2](#) | [3](#) | [4](#) | [5](#) | **[6](#)** | [7](#) | [8](#) | [Next page >>](#)

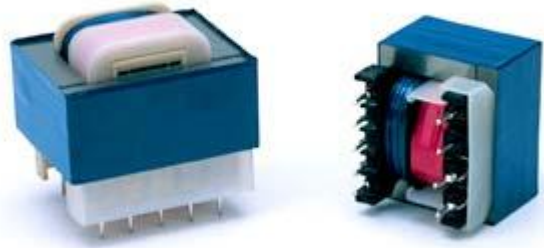


**Product Name :**

Pin Type Power Transformer

**Product Features :**

		<b>Primary</b>	<b>Secondary</b>
EI - 35 x 7	0.7VA	3	3
EI - 35 x 12	1.5VA	3	3
EI - 35 x 14	2.0VA	3	3
EI - 41 x 17	3.2VA	4	4
EI - 41 x 20	4.5VA	3	5
EI - 41 x 24	5.5VA	3	5
EI - 48 x 20	6.5VA	5	7
EI - 48 x 25	10 VA	5	7
EI - 57 x 17	8 VA	4	4
EI - 57 x 30	22VA	7	10
EI - 57 x 35	28VA	7	10
EI - 66 x 16	10VA	4	4
EI - 66 x 30	33VA	7	11
EI - 66 x 40	40VA	7	11

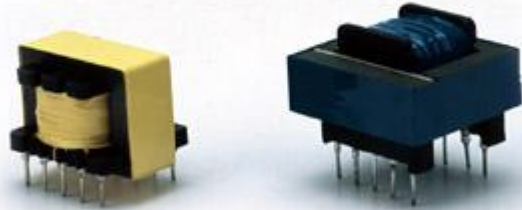

**Product Name :**  
High Frequency Power Transformers

**Product Features :**

		25Khz	50Khz	100Khz
EI-12.5	(SEE 12)	2W	4W	8W
EI-16	(EE 16)	7W	14W	26W
EI-19	(EE 19)	10W	20W	36W
EI-22	(EE 22)	9W	18W	32W
EI-22/19/6	.	14W	26W	46W
EI-25	(EE 25)	20W	37W	64W
EI-28	.	33W	60W	91W
EI-30	(EE 30)	54W	95W	138W
EI-33/29/13	.	75W	125W	179W
EI-35	(EE 35)	69W	119W	175W
EI-40	(EE 40)	111W	195W	297W
EI-50	(EE 50)	193W	301W	444W
EI-60	(EE 60)	235W	366W	559W