



Home Dehumidifier



Energy Saving Family Look 12L

TECHNICAL SPECIFICATIONS

Model	DYD-E12A411	DYD-E12A412
Power Supply	220-240V~ 50Hz	220-240V~ 50Hz
Dehumidifying Capacity	12L/day(30°C RH80%) 6.5L/day(27°C RH60%)	12L/day(30°C RH80%) 6.5L/day(27°C RH60%)
* Power Consumption	165W	190W
Air Volume	70m³/h	70m³/h
Water Tank Capacity	2.5L	2.5L
Noise Level	44dB(A)	44dB(A)
Operating Temperature	5~35°C	5~35°C
Refrigerant	R134a	R134a
Net Weight	9.8 kg	9.7 kg
Gross Weight	10.8 kg	10.7 kg
Product Size(W × D × H)	325 × 248 × 475 mm	325 × 248 × 475 mm
Packing Size(W × D × H)	360 × 295 × 525 mm	360 × 295 × 525 mm
Loading Quantity 20'GP	484pcs	484pcs
40'GP	992pcs	992pcs
40'HQ	1,230pcs	1,230pcs



FEATURES

- Electronic control
- LED display with soft buttons
- Up to 24 hours timer off
- Auto restart
- Auto defrost
- Water full alarm and auto shut-off
- Washable air filter
- Continuous drainage
- Anion function selectable
- HEPA / Carbon filter selectable



Energy Saving Family Look 20L

TECHNICAL SPECIFICATIONS

Model	DYD-F20A411	DYD-F20A412
Power Supply	220-240V~ 50Hz	220-240V~ 50Hz
Dehumidifying Capacity	20L/day(30°C RH80%) 11.5L/day(27°C RH60%)	20L/day(30°C RH80%) 12L/day(27°C RH60%)
* Power Consumption	255W	320W
Air Volume	135m³/h	135m³/h
Water Tank Capacity	5.5L	5.5L
Noise Level	46dB(A)	46dB(A)
Operating Temperature	5~35°C	5~35°C
Refrigerant	R134a	R134a
Net Weight	13.6 kg	13.2 kg
Gross Weight	14.5 kg	14.5 kg
Product Size(W × D × H)	385 × 290 × 595 mm	385 × 290 × 595 mm
Packing Size(W × D × H)	415 × 325 × 660 mm	415 × 325 × 660 mm
Loading Quantity 20"GP	294pcs	294pcs
40"GP	588pcs	588pcs
40"HQ	784pcs	784pcs



* Different control types (LCD + Touch Panel) and different top cover designs selectable.

FEATURES

- Electronic control
- LED display with soft buttons
- Up to 24 hours timer off
- Auto restart
- Auto defrost
- Water full alarm and auto shut-off
- Washable air filter
- Continuous drainage
- Anion function selectable
- HEPA / Carbon filter selectable



NEW REFRIGERANT R290 DEHUMIDIFIER

DYD-Z12A / DYD-Z20A



Specifications



Model		DYD-Z12A	DYD-Z20A
Power Supply		220-240V~ 50Hz	220-240V~ 50Hz
Dehumidifying Capacity		12L/day(30°C RH80%)	20L/day(30°C RH80%)
		6.5L/day(27°C RH60%)	12L/day(27°C RH60%)
Rated Power		175W	255W
Air Volume	- High	100m³/h	180m³/h
	- Medium	/	165m³/h
	- Low	70m³/h	145m³/h
Noise Level	- High	40dB(A)	45dB(A)
	- Medium	/	44dB(A)
	- Low	36dB(A)	42dB(A)
Water Tank		2.3L	4.4L
Operating Temperature		5~35°C	5~35°C
Refrigerant		R134a	R134a
Net Weight		12.0 kg	14.5 kg
Gross Weight		13.5 kg	16.0 kg
Product Size(W × D × H)		308 × 229 × 478 mm	360 × 242 × 548 mm
Packing Size(W × D × H)		360 × 280 × 520 mm	442 × 312 × 594 mm
Loading Quantity	20'GP	528pcs	288pcs
	40'GP	1,092pcs	600pcs
	40'HQ	1,365pcs	800pcs



What you can enjoy

Keep your room at the most comfortable humidity as you want.

Energy saving feature offers you another way to save money.

Auto switch off when water tank full.

Laundry drying function to speed up the clothes drying.

Accessory Selectable

Drainage Pipe 30cm / 60cm / Customized

Certification Programs

GS, CE, CB, RoHS

HK EER Grade 1 (Low energy consumption)

*New Refrigerant R290 Optional

DYD-S12A411

Due to system upgrade, our new 12L energy saving model has achieved great success. You'll find the machine run so quiet that you can enjoy your sweet dream.

Start your comforts from here.



S12A-Newly Launched 12L Dehumidifier With System Upgrade

Model		DYD-S12A411	DYD-S12A412	DYD-S10A412
Power Supply		220-240V~ 50Hz	220-240V~ 50Hz	220-240V~ 50Hz
Dehumidifying Capacity		12L/day(30°C RH80%)	12L/day(30°C RH80%)	10L/day(30°C RH80%)
		6.5L/day(27°C RH60%)	6.5L/day(27°C RH60%)	5.0L/day(27°C RH60%)
Power		156W	180W	160W
Air Volume	- High	100m³/h	100m³/h	100m³/h
	- Low	77m³/h	77m³/h	77m³/h
Noise Level	- High	40dB(A)	40dB(A)	40dB(A)
	- Low	36dB(A)	36dB(A)	36dB(A)
Water Tank		2.6L	2.6L	2.6L
Operating Temperature		5~35°C	5~35°C	5~35°C
Refrigerant		R134a	R134a	R134a
Net Weight		11.4 kg	11.2 kg	10.5 kg
Gross Weight		12.5 kg	12.0 kg	11.5 kg
Product Size(W × D × H)		300 × 250 × 463 mm	300 × 250 × 463 mm	300 × 250 × 463 mm
Packing Size(W × D × H)		357 × 320 × 517 mm	357 × 320 × 517 mm	357 × 320 × 517 mm
Loading Quantity 20'GP		464pcs	464pcs	464pcs
	40'GP	956pcs	956pcs	956pcs
	40'HQ	1,195pcs	1,195pcs	1,195pcs

What you can enjoy

Keep your room at the most comfortable humidity as you want.
 Energy saving feature offers you another way to save money.
 Noise low to 36dB, provide you with a quieter sleeping environment.
 No more wet clothes during rainy days with quick clothes drying function on.
 Auto switch off when water tank full.
 Selectable casters are easier to move.

Accessory Selectable

Drainage Pipe 30cm / 60cm / Customized

Certification Programs

GS, CE, CB, RoHS
 HK EER Grade 1 (Low energy consumption)

Different color choices, Customized colors are available



Classic Black – Bright Red - Navy Blue – Rose Gold – Silver

NEW REFRIGERANT R290 DEHUMIDIFIER

DYD-S20A



Specifications

Model		DYD-S20A	DYD-S20A
Power Supply		220-240V~ 50Hz	220-240V~ 50Hz
Dehumidifying Capacity		20L/day(30°C RH80%)	19L/day(30°C RH80%)
		12L/day(27°C RH60%)	10.5L/day(27°C RH60%)
Rated Power		355W	325W
Air Volume	- High	140m³/h	140m³/h
	- Low	128m³/h	128m³/h
Noise Level	- High	46dB(A)	46dB(A)
	- Low	44dB(A)	44dB(A)
Water Tank		4.8L	4.8L
Operating Temperature		5~35°C	5~35°C
Refrigerant		R134a	R290
Net Weight		15.5 kg	15.5 kg
Gross Weight		16.0 kg	16.0 kg
Product Size(W × D × H)		335 × 285 × 540 mm	335 × 285 × 540 mm
Packing Size(W × D × H)		390 × 330 × 590 mm	390 × 330 × 590 mm
Loading Quantity 20'GP		315pcs	315pcs
	40'GP	648pcs	648pcs
	40'HQ	864pcs	864pcs



What you can enjoy

- Keep your room at the most comfortable humidity as you want.
- Energy saving feature offers you another way to save money.
- Auto switch off when water tank full.
- Laundry drying function to speed up the clothes drying.

Accessory Selectable

Drainage Pipe 30cm / 60cm / Customized

Certification Programs

GS, CE, CB, RoHS
HK EER Grade 1 (Low energy consumption)

Different color choices, Customized colors are available



Classic Black – Bright Red - Navy Blue – Rose Gold – Silver

*New Refrigerant R290 Optional

NEW SUPER THIN 20L DEHUMIDIFIER

DYD-X12A / DYD-X20A



Specifications



Model		DYD-X12A	DYD-X20A
Power Supply		220-240V~ 50Hz	220-240V~ 50Hz
Dehumidifying Capacity (Medium Fan)		12L/day(30°C RH80%)	20L/day(30°C RH80%)
		6.5L/day(27°C RH60%)	12L/day(27°C RH60%)
Rated Power		145W	265W
HK EER Grade 1		Yes	Yes
Air Volume	- High	135m³/h	150m³/h
	- Medium	125m³/h	135m³/h
	- Low	105m³/h	120m³/h
Noise Level	- High	43dB(A)	44dB(A)
	- Medium	40dB(A)	42dB(A)
	- Low	37dB(A)	38dB(A)
Water Tank		4.0L	4.0L
Operating Temperature		5~35°C	5~35°C
Refrigerant		R134a	R134a
Net Weight		12.0 kg	13.0 kg
Gross Weight		13.6 kg	14.6 kg
Product Size(W × D × H)		360 × 234 × 569 mm	360 × 234 × 569 mm
Packing Size(W × D × H)		425 × 275 × 627 mm	425 × 275 × 627 mm
Loading Quantity 20'GP		333pcs	333pcs
	40'GP	684pcs	684pcs
	40'HQ	856pcs	912pcs



Features

Clothes Drying
 Sleeping Mode
 Auto Dehumidifying
 Built - In Ionizer
 24 Hours Timer - off
 LED Display + Touch Panel
 Convenient Cord Bracket
 Super Thin Design, Save Space
 Tri-Colors light report different humidity level
 New Refrigerant R290 Optional

Accessory Selectable

Drainage Pipe 60cm / Customized

Certification Programs

GS, CE, CB, RoHS



LAUNDRY
DRYING



BUILT-IN
IONIZER



EASY
ROLL CASTORS



AUTO
DEHUMIDIFYING



TOUCH PANEL



AUTO
STOP



SLEEP
MODE



CONTINUOUS
DRAINAGE



OUTAGE MEMORY

DYD-T23A

Smart inverter dehumidifier with unique design and multifunction provides you a new experience of differences.

It's more of a piece of art than a simple machine in dehumidifier field.



T23A-Performance & Specifications

Model	T23A	
Room Size	45 m²	
Product		
Dehumidifying Capacity	23L/day (30 °C RH80%) 12L/day (27 °C RH60%)	
Power	240W	
Air Volume	- High	180 m ³ /h
	- Medium	155 m ³ /h
	- Low	135 m ³ /h
Noise Level	- High	46 dB(A)
	- Medium	42 dB(A)
	- Low	40 dB(A)
Water Tank	4.5L	
Operating Temperature	5~35 °C	
Refrigerant	R134a	
Net Weight	14.5 kg	
Gross Weight	15.8 kg	
Product Size(W × D × H)	376 × 232 × 562 mm	
Packing Size(W × D × H)	445 × 310 × 650 mm	
Loading Quantity	20'GP	288pcs
	40'GP	590pcs
	40'HQ	788pcs

Features


Air Purifying
Clothes Drying
Sleeping Mode
Auto Dehumidifying
Built - In Ionizer
8 Hours Timer - off
LED Display + Touch Panel
Safety Child Lock
Convenient Cord Bracket

Accessory Selectable

2cm HEPA Filter
2cm Carbon Filter
2cm HEPA + Carbon 2 in 1 Filter
Drainage Pipe 30cm / 60cm / Customized

Certification Programs

GS, CE, CB
HK EER Grade 1 (Low energy consumption)



* A smart Inverter 28L dehumidifier is coming soon.

Multi-Function



Features

Air Purifying	Yes
Clothes Drying	Yes
Auto Dehumidifying	Yes
Timing Off	1 - 24h
Automatic Shut Off When Tank Full	Yes
Control Type	LED display soft-buttons
Compressor Type	Rotary
Washable Air Filter	Yes
Optional Continuous Drainage	Yes
EU Garden Hose Adapter	Yes
Built-In Ionizer Option	Yes
Tri-colors light report different humidity level	

Accessory Selectable

18mm HEPA Filter
18mm Carbon Filter
3mm Coal Filter
Drainage Pipe 30cm / 60cm / Customized

Certification Programs

GS, CE, CB, ROHS
HK EER Grade 1 (Low energy consumption)

Different color choices, customized colors are available



New Coming 20L ENERGY SAVING Dehumidifier



Model

DYD-W20A

Product

Dehumidifying Capacity	20L/day (30°C RH80%) 12L/day (27°C RH60%)
Rated Power	265W
Air Volume	145 m³/hr
Noise Level	43 dB(A)
Water Tank Capacity	6.5L
Operating Temperature	5~35°C
Refrigerant	R134a
Net Weight	13.5 kg
Gross Weight	14.6 kg
Timer	1 ~ 24h
Product Size(W × D × H)	360 × 285 × 564 mm
Packing Size(W × D × H)	410 × 316 × 629 mm
Loading Quantity	20'GP 306pcs 40'GP 633pcs 40'HQ 844pcs







Compact & Fashionable

TECHNICAL SPECIFICATIONS

Model	DYD-N16A	DYD-N20A
Power Supply	220-240V~ 50Hz	220-240V~ 50Hz
Dehumidifying Capacity	16L/day(30°C RH80%)	20L/day(30°C RH80%)
	9L/day(27°C RH60%)	11.5L/day(27°C RH60%)
Power Consumption	250W	300W
Air Volume	100m³/h	120m³/h
Water Tank Capacity	4.0L	4.0L
Noise Level	44dB(A)	44dB(A)
Operating Temperature	5~35°C	5~35°C
Refrigerant	R134a	R134a
Net Weight	11.8 kg	12.4 kg
Gross Weight	13.4 kg	14.0 kg
Product Size(W × D × H)	375 × 287 × 581 mm	375 × 287 × 581 mm
Packing Size(W × D × H)	425 × 330 × 630 mm	425 × 330 × 630 mm
Loading Quantity 20'GP	273pcs	273pcs
40'GP	588pcs	588pcs
40'HQ	784pcs	784pcs



FEATURES

- Electronic control
- LED display with soft buttons
- 1/2/4/6/8 hours timer off
- Auto restart
- Auto defrost
- Water full alarm and auto shut-off
- Washable air filter
- Continuous drainage
- Clothes drying
- Anion function selectable



LCD + Touch Panel Intelligent 30L Dehumidifier

TECHNICAL SPECIFICATIONS

Model	DYD-M30A
Power Supply	220-240V~ 50Hz
Dehumidifying Capacity	30L/day(30°C RH80%) 17L/day(27°C RH60%)
Power Consumption	370W
Air Volume	215m³/h
Water Tank Capacity	6.0L
Noise Level	46dB(A)
Operating Temperature	5~35°C
Refrigerant	R410A
Net Weight	15.8 kg
Gross Weight	17.5 kg
Product Size(W × D × H)	402 × 260 × 610 mm
Packing Size(W × D × H)	425 × 310 × 665 mm
Loading Quantity 20'GP	294pcs
40'GP	624pcs
40'HQ	832pcs



FEATURES

- Electronic control
- LCD display with touch keys
- Up to 24 hours timer off
- Auto restart
- Auto defrost
- Auto swing
- Air purifying
- Clothes drying
- Unique shoes drying
- Water full alarm and auto shut-off
- Washable air filter
- Continuous drainage



Air Purifier + Air Dehumidifier 2 in 1 design

TECHNICAL SPECIFICATIONS

Model	DYD-U20A
Power Supply	220-240V ~ 50Hz
Dehumidifying Capacity	20L/day(30°C RH80%) 12L/day(27°C RH60%)
Power Consumption	250W
Air Volume	200m³/h
Water Tank Capacity	4.2L
Noise Level	48dB(A)
Operating Temperature	5~35°C
Refrigerant	R134a
Net Weight	15.8 kg
Gross Weight	17.6 kg
Product Size(W × D × H)	408 × 280 × 602 mm
Packing Size(W × D × H)	474 × 351 × 696 mm
Loading Quantity 20'GP	225pcs
40'GP	475pcs
40'HQ	475pcs



FEATURES

- Air purifying
- Clothes drying
- Auto dehumidifying
- Sleeping mode
- Built-in ionizer
- 24 hours timer off function
- LED display with touch keys
- 4.3cm HEPA+Carbon 2 in 1 filter
- Continuous drainage
- Water full alarm and auto shut off
- Safety child lock function



Smart Inverter Dehumidifier

TECHNICAL SPECIFICATIONS

Model	DYD-V58A
Power Supply	220-240V~ 50Hz
Dehumidifying Capacity	58L/day(30°C RH80%) 35L/day(27°C RH60%)
Power Consumption	635W
Air Volume	310m³/h
Water Tank Capacity	6.3L
Noise Level	48dB(A)
Operating Temperature	5~35°C
Refrigerant	R410A
Net Weight	25.0 kg
Gross Weight	28.0 kg
Product Size(W × D × H)	430 × 333 × 732 mm
Packing Size(W × D × H)	553 × 451 × 815 mm
Loading Quantity 20'GP	100pcs
40'GP	210pcs
40'HQ	315pcs



FEATURES

- Air purifying
- Clothes drying
- Auto dehumidifying
- Sleeping mode
- Built-in ionizer
- 24 hours timer off function
- LED display with touch keys
- 2.8cm HEPA filter / Carbon filter / 2.8cm HEPA+Carbon 2in1 filter selectable
- Continuous drainage
- Water full alarm and auto shut off
- Safety child lock function



Super Thin & Compact

TECHNICAL SPECIFICATIONS

Model	DYD-A12A	DYD-A20A
Power Supply	220-240V~ 50Hz	220-240V~ 50Hz
Dehumidifying Capacity	12L/day(30°C RH80%)	20L/day(30°C RH80%)
	6.5L/day(27°C RH60%)	12L/day(27°C RH60%)
Power Consumption	170W	310W
Air Volume	110m³/h	110m³/h
Water Tank Capacity	4.0L	4.0L
Noise Level	44dB(A)	46dB(A)
Operating Temperature	5~35°C	5~35°C
Refrigerant	R134a	R134a
Net Weight	10.5 kg	11.0 kg
Gross Weight	11.5 kg	12.0 kg
Product Size(W × D × H)	355 × 180 × 525 mm	355 × 180 × 525 mm
Packing Size(W × D × H)	400 × 240 × 590 mm	400 × 240 × 590 mm
Loading Quantity 20'GP	540pcs	540pcs
40'GP	1,124pcs	1,124pcs
40'HQ	1,124pcs	1,124pcs



FEATURES

- Electronic control
- LED display with soft buttons
- Up to 24 hours timer off
- Auto restart
- Auto defrost
- Water full alarm and auto shut-off
- Washable air filter
- Continuous drainage
- Clothes drying
- Air purifying



7L Super Water Tank Of 20L Dehumidifier

TECHNICAL SPECIFICATIONS

Model	DYD-G20A	DYD-G25A
Power Supply	220-240V~ 50Hz	220-240V~ 50Hz
Dehumidifying Capacity	20L/day(30°C RH80%) 12L/day(27°C RH60%)	25L/day(30°C RH80%) 15L/day(27°C RH60%)
Power Consumption	320W	390W
Air Volume	135m³/h	155m³/h
Water Tank Capacity	7.0L	7.0L
Noise Level	46dB(A)	48dB(A)
Operating Temperature	5~35°C	5~35°C
Refrigerant	R134a	R410A
Net Weight	13.2 kg	14.2 kg
Gross Weight	14.5 kg	15.5 kg
Product Size(W × D × H)	385 × 290 × 595 mm	385 × 290 × 595 mm
Packing Size(W × D × H)	415 × 325 × 660 mm	415 × 325 × 660 mm
Loading Quantity 20'GP	294pcs	294pcs
40'GP	588pcs	588pcs
40'HQ	784pcs	784pcs



FEATURES

- Electronic control
- LED display with soft buttons
- Rotary compressor
- Up to 24 hours timer off
- Auto restart
- Auto defrost
- Auto swing
- Water full alarm and auto shut-off
- Washable air filter
- Continuous drainage



Commercial & High Efficient

TECHNICAL SPECIFICATIONS

Model	DYD-C30A	DYD-D50A
Power Supply	220-240V~ 50Hz	220-240V~ 50Hz
Dehumidifying Capacity	30L/day(30°C RH80%)	50L/day(30°C RH80%)
	18L/day(27°C RH60%)	30L/day(27°C RH60%)
Power Consumption	460W	720W
Air Volume	260m³/h	360m³/h
Water Tank Capacity	6.5L	8.5L
Noise Level	55dB(A)	56dB(A)
Operating Temperature	5~35°C	5~35°C
Refrigerant	R410A	R410A
Net Weight	18.0 kg	23.5 kg
Gross Weight	19.5 kg	25.5 kg
Product Size(W × D × H)	350 × 295 × 597mm	397 × 330 × 630 mm
Packing Size(W × D × H)	420 × 370 × 670 mm	480 × 420 × 710 mm
Loading Quantity 20'GP	246pcs	204pcs
40'GP	528pcs	408pcs
40'HQ	704pcs	408pcs



DYD-C30A



DYD-D50A

FEATURES

- Electronic control
- LED display with soft buttons
- Auto defrost
- Auto restart
- Up to 24 hours timer off
- Water full alarm and auto shut-off
- Washable air filter
- Continuous drainage



Industrial Dehumidifier




Professional & Stable

FEATURES

- Electronic control
- LED display with soft buttons
- Rotary compressor
- Big and stable wheels
- Big metal handle
- Washable air filter
- Removable water pump
- Hot gas bypass system
- Quick water pipe connector
- Vent hose can be connected
- Simplified operation

TECHNICAL SPECIFICATIONS

	For European Market	For American Market
Model	DY-55L	DY-65P
Power Supply	220-240V~ 50Hz	115V~ 60Hz
Dehumidifying Capacity	55L/day(30°C RH80%) 30L/day(27°C RH60%)	116pints/day (86°F 80%RH) 64pints/day (80°F 60%RH)
Power Consumption	720W	7.3amps
Air Volume	350m³/h	205CFM
Noise Level	58dB(A)	58dB(A)
Operating Temperature	5~35°C	33~100°F
Refrigerant	R410A	R410A
Net Weight	39.0 kg	86.0 lbs.
Gross Weight	42.0 kg	93.0 lbs.
Product Size(W × D × H)	545 × 500 × 638 mm	21 × 20 × 25 in.
Packing Size(W × D × H)	605 × 540 × 700 mm	24 × 21 × 28 in.
Loading Quantity 20'GP	114pcs	114pcs
40'GP	246pcs	246pcs
40'HQ	246pcs	246pcs

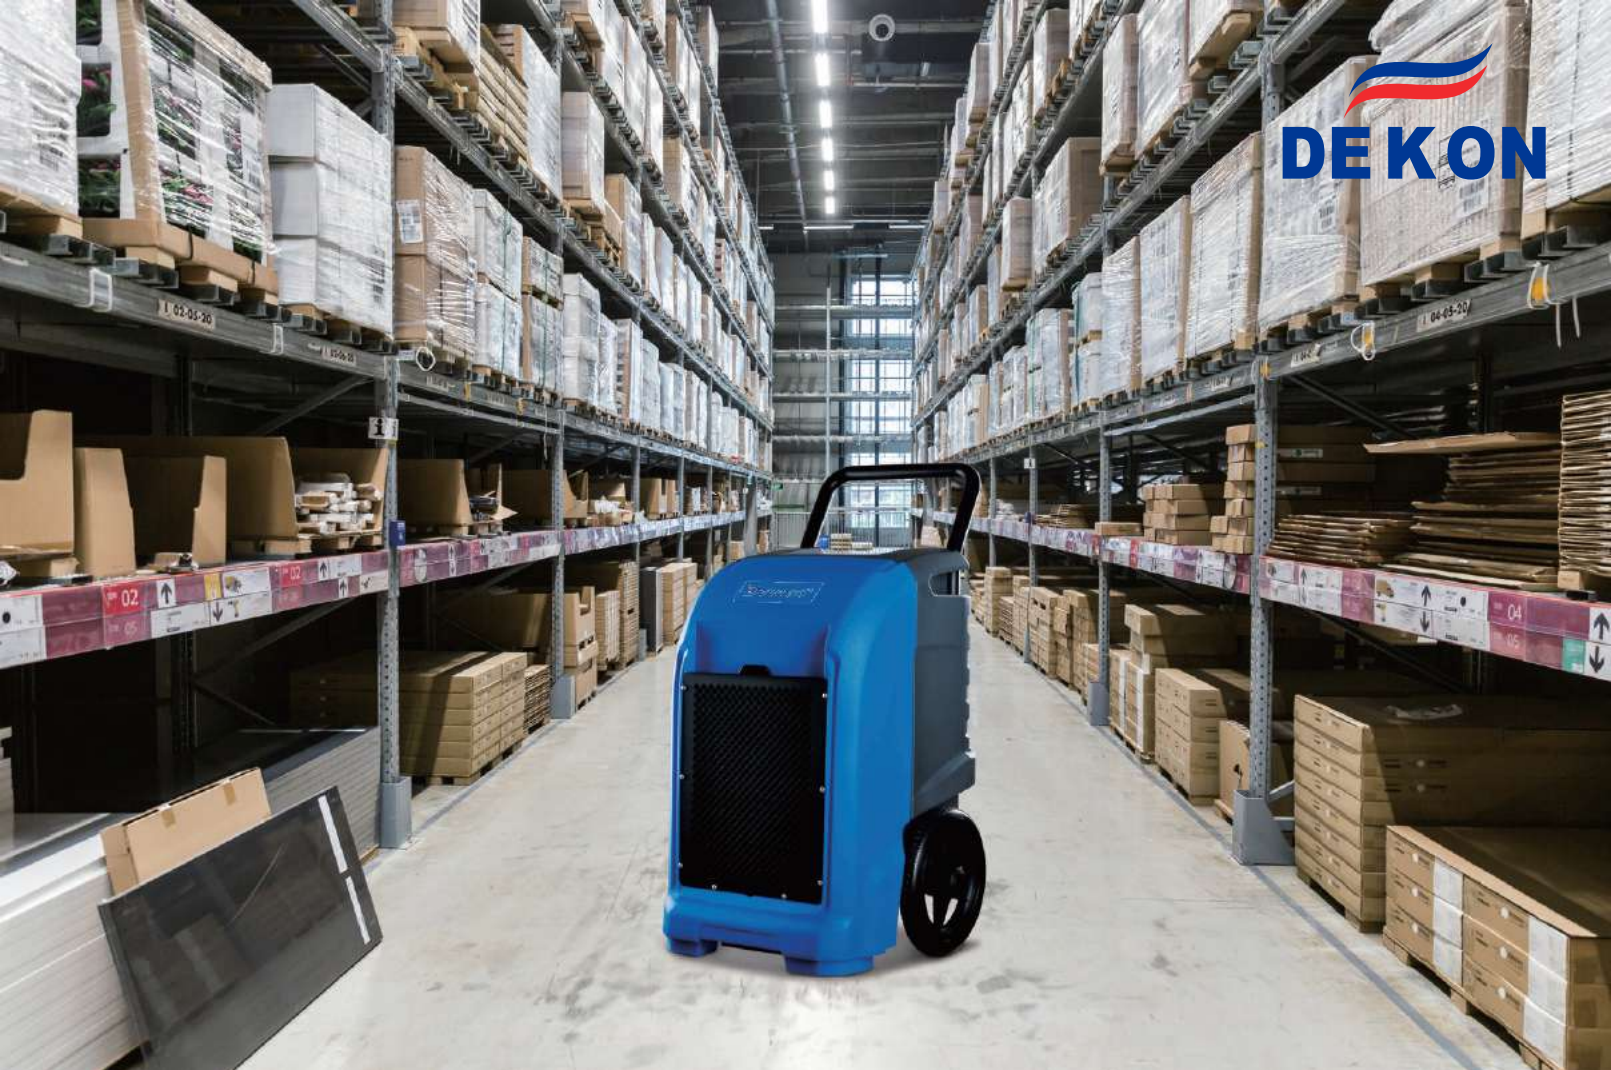

Professional & Stable

FEATURES

- Electronic control
- LED display with soft buttons
- Rotary compressor
- Big and stable wheels
- Big metal handle
- Washable air filter
- Removable water pump
- Hot gas bypass system
- Quick water pipe connector
- Vent hose can be connected
- Simplified operation

TECHNICAL SPECIFICATIONS

	For European Market	For American Market
Model	DY-65L	DY-65L
Power Supply	220-240V/50Hz	115V/60Hz
Dehumidifying Capacity	65L/day(30°C RH80%) 38L/day(27°C RH60%)	137pints/day (86°F 80%RH) 76pints/day (80°F 60%RH)
Power Consumption	750W	7.3amps
Air Volume	400m³/h	235CFM
Noise Level	58dB(A)	58dB(A)
Operating Temperature	5~35°C	33~100°F
Refrigerant	R410A	R410A
Net Weight	38.0 kg	81.0 lbs.
Gross Weight	41.0 kg	91.0 lbs.
Product Size(W × D × H)	510 × 485 × 810 mm	20 × 19 × 32 in.
Packing Size(W × D × H)	560 × 540 × 860 mm	22 × 21 × 34 in.
Loading Quantity 20'GP	80pcs	80pcs
40'GP	176pcs	176pcs
40'HQ	260pcs	260pcs




Professional & Stable

FEATURES

- Electronic control
- LED display with soft buttons
- Rotary compressor
- Big and stable wheels
- Big metal handle
- Washable air filter
- Removable water pump
- Hot gas bypass system
- Quick water pipe connector
- Vent hose can be connected
- Simplified operation

TECHNICAL SPECIFICATIONS

	For European Market	For American Market
Model	DY-65N	DY-80P
Power Supply	220-240V/50Hz	115V/60Hz
Dehumidifying Capacity	65L/day(30°C RH80%)	137pints/day (86°F 80%RH)
	38L/day(27°C RH60%)	76pints/day (80°F 60%RH)
Power Consumption	750W	7.8amps
Air Volume	400m³/h	235CFM
Noise Level	58dB(A)	58dB(A)
Operating Temperature	5~35°C	33~100°F
Refrigerant	R410A	R410A
Net Weight	38.5 kg	87.0 lbs.
Gross Weight	41.5 kg	94.0 lbs.
Product Size(W × D × H)	572 × 498 × 815 mm	22.5 × 19.5 × 32 in.
Packing Size(W × D × H)	620 × 580 × 870 mm	24.5 × 23 × 34.5 in.
Loading Quantity 20'GP	72pcs	72pcs
40'GP	152pcs	152pcs
40'HQ	228pcs	228pcs

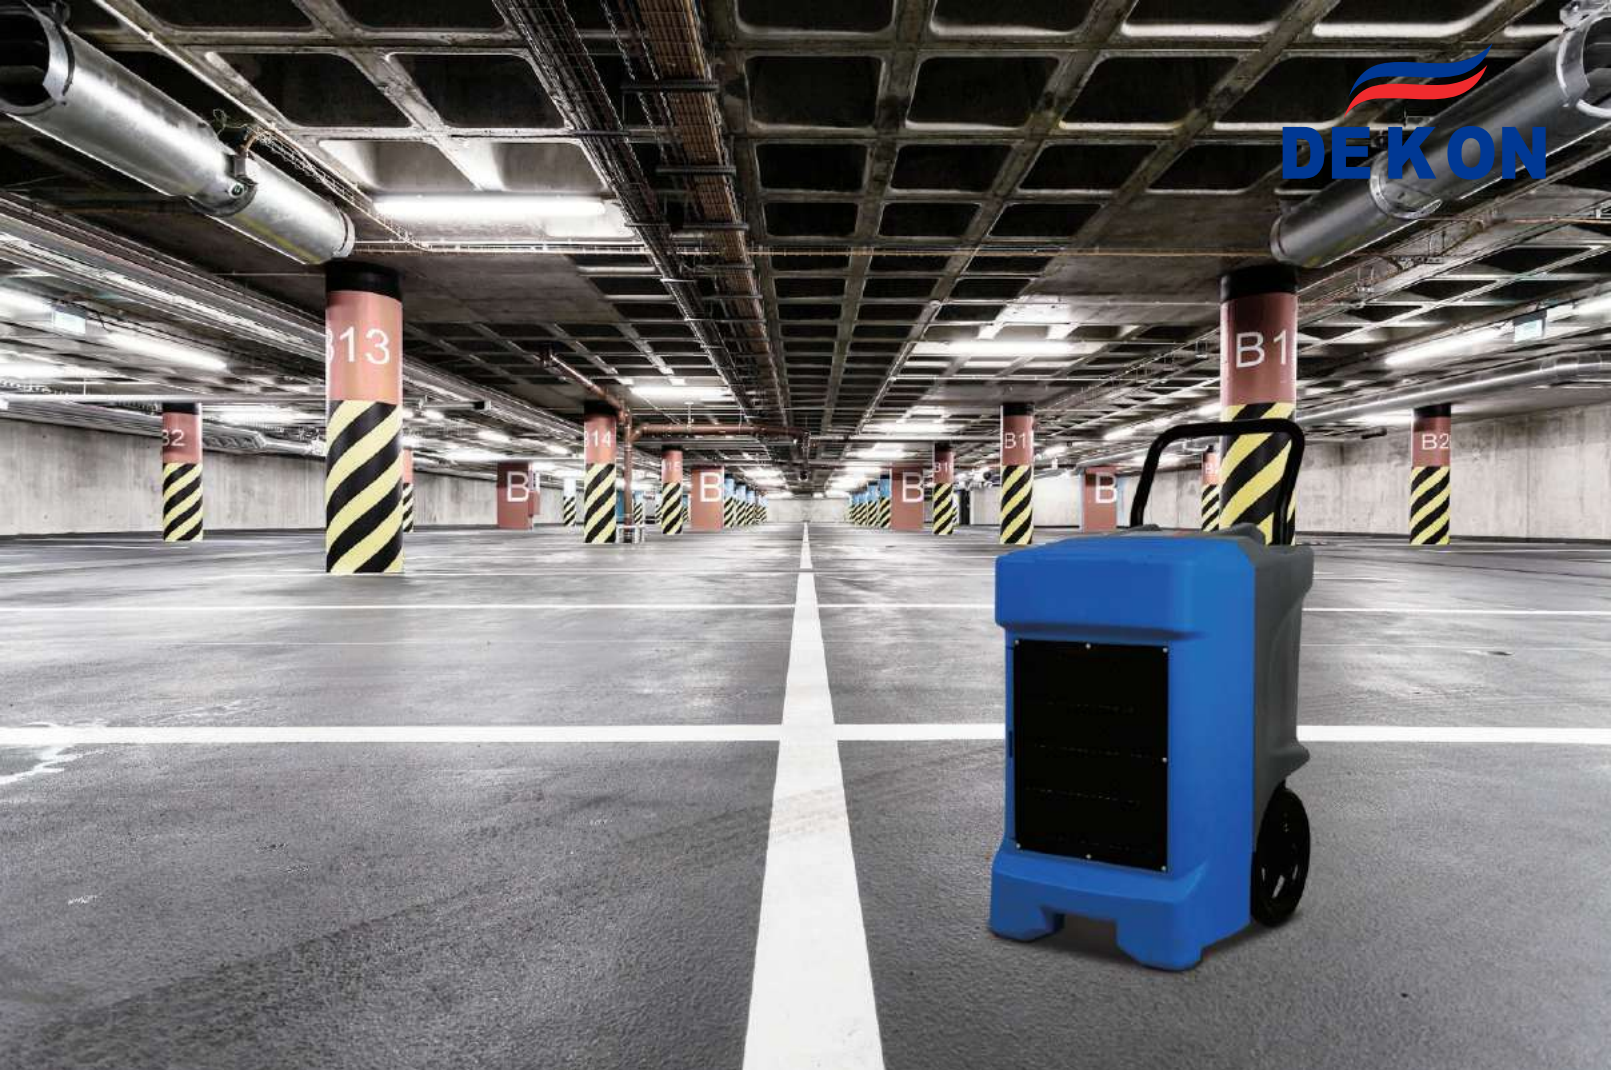

Professional & Stable

FEATURES

- Electronic control
- LED display with soft buttons
- Rotary compressor
- Big and stable wheels
- Big metal handle
- Washable air filter
- Removable water pump
- Hot gas bypass system
- Quick water pipe connector
- Vent hose can be connected
- Simplified operation

TECHNICAL SPECIFICATIONS

	For European Market	For American Market
Model	DY-85L	DY-85L
Power Supply	220-240V/50Hz	115V/60Hz
Dehumidifying Capacity	85L/day(30°C RH80%)	180pints/day (86°F 80%RH)
	50L/day(27°C RH60%)	105pints/day (80°F 60%RH)
Power Consumption	990W	7.5amps
Air Volume	700m³/h	410CFM
Noise Level	58dB(A)	58dB(A)
Operating Temperature	5~35°C	33~100°F
Refrigerant	R410A	R410A
Net Weight	45.0 kg	97.0 lbs.
Gross Weight	49.0 kg	108.0 lbs.
Product Size(W × D × H)	530 × 515 × 830 mm	21 × 20 × 32.5 in.
Packing Size(W × D × H)	610 × 580 × 870 mm	24 × 23 × 34.5 in.
Loading Quantity 20'GP	72pcs	72pcs
40'GP	152pcs	152pcs
40'HQ	228pcs	228pcs

Industrial Dehumidifier



*Library

*Archives Center

*Large and medium warehouse

For what you need

Strong • Dehumidification



DY-690EB



DY-6105EB



DY-6120EB

FEATURES

- Electronic control
- LED display with soft buttons
- Rotary compressor
- Easily move with casters
- Washable air filter

TECHNICAL SPECIFICATIONS

Model	DY-690EB	DY-6105EB	DY-6120EB
Power Supply	220-240V~ 50Hz	220-240V~ 50Hz	220-240V~ 50Hz
Dehumidifying Capacity	90L/day(30℃ RH80%)	105L/day(30℃ RH80%)	120L/day(30℃ RH80%)
	55L/day(27℃ RH60%)	65L/day(27℃ RH60%)	70L/day(27℃ RH60%)
Power Consumption	1120W	1160W	1190W
Air Volume	500m³/h	520m³/h	720m³/h
Noise Level	58dB(A)	60dB(A)	60dB(A)
Operating Temperature	5~35℃	5~35℃	5~35℃
Refrigerant	R410A	R410A	R410A
Net Weight	44.0 kg	47.0 kg	51.0 kg
Gross Weight	48.0 kg	53.0 kg	57.5 kg
Product Size(W × D × H)	480 × 440 × 970 mm	540 × 410 × 990 mm	600 × 382 × 1000 mm
Packing Size(W × D × H)	550 × 490 × 1080 mm	610 × 490 × 1100 mm	670 × 450 × 1100 mm
Loading Quantity 20'GP	88pcs	84pcs	80pcs
40'GP	192pcs	182pcs	180pcs
40'HQ	192pcs	182pcs	180pcs



DY-6180EB



DY-6240EB



DY-6480EB

FEATURES

- Electronic control
- FND display with touch keys
- Rotary compressor
- Easily move with casters
- Washable air filter

TECHNICAL SPECIFICATIONS

Model	DY-6180EB	DY-6240EB	DY-6480EB
Power Supply	220-240V~ 50Hz	380V~ 50Hz	380V~ 50Hz
Dehumidifying Capacity	180L/day(30°C RH80%)	240L/day(30°C RH80%)	480L/day(30°C RH80%)
	120L/day(27°C RH60%)	160L/day(27°C RH60%)	280L/day(27°C RH60%)
Power Consumption	2380W	3900W	6500W
Air Volume	1200m³/h	1500m³/h	3000m³/h
Noise Level	65dB(A)	65dB(A)	68dB(A)
Operating Temperature	5~35°C	5~35°C	5~35°C
Refrigerant	R410A	R410A	R22
Net Weight	110.0 kg	130.0 kg	230.0 kg
Gross Weight	143.0 kg	162.5 kg	270.5 kg
Product Size(W × D × H)	774 × 470 × 1685 mm	774 × 470 × 1685 mm	1190 × 450 × 1750 mm
Packing Size(W × D × H)	900 × 580 × 1860 mm	900 × 580 × 1860 mm	1300 × 610 × 1980 mm
Loading Quantity 20'GP	18pcs	18pcs	12pcs
40'GP	46pcs	46pcs	27pcs
40'HQ	46pcs	46pcs	27pcs