


TRAVEL CHARGER

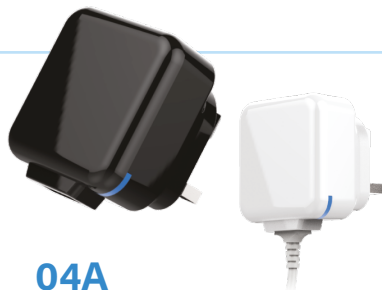

04A

INPUT: 100-240V AC 50/60 Hz 1.3A
USB OUTPUT: 1A
LED indication

USB-A
x 1



13BAC




13UAC



INPUT: 100-240V AC 50/60 Hz 0.6A
OUTPUT USB-C: 5V/3A, 9V/2.22A, 12V/1.67A, PD20W Max.
USB-A: 5V/3A, 9/2A, 12V/1.5A, QC3.0 18W Max.
USB-C+USB-A: 5V3A Max.
TOTAL OUTPUT: 20W Max.

PD 20W

USB-A USB-C
x 1 x 1

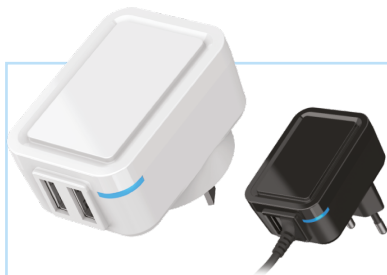

16A

INPUT: 100-240V AC 50/60 Hz 1.3A
OUTPUT
USB-A1: 3.6V-6.5V/3A, 6.5-9V/2A, 19V-2V/1.5A
USB-A2: 2.1A
LED indication

USB-A
x 2



17A

INPUT: 100-240V AC 50/60 Hz 1.3A
OUTPUT
USB-A1: 3.6V-6.5V/3A, 6.5-9V/2A, 19V-2V/1.5A
USB-A2: 2.1A
LED indication

USB-A
x 2



18A

INPUT: 100-240V AC 50/60 Hz 1.3A
USB OUTPUT: 1A
LED indication


USB-A
x 1

TRAVEL CHARGER




21A

INPUT: 100-240V AC 50/60 Hz 1.5A
OUTPUT: DC5V 1A Max. 5W

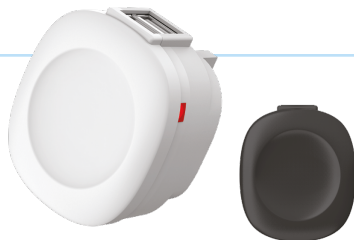

22A

INPUT: 100-240V AC 50/60 Hz 1.3A
OUTPUT: 3.6V-6.5V/3A, 6.5-9V/2A, 19V-2V/1.5A
USB-A1: 2.1A
USB-A2: LED indication

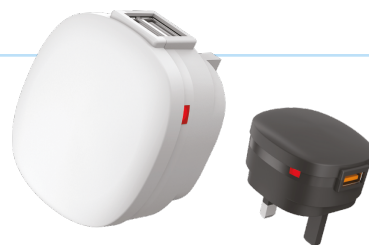

23A

INPUT: 100-240V AC 50/60 Hz 1.3A
OUTPUT: 3.6V-6.5V/3A, 6.5-9V/2A, 19V-2V/1.5A
USB-A1: 2.1A
USB-A2: LED indication




40A

INPUT: 100-240V AC 50/60 Hz 1.3A
OUTPUT: 3.6V-6.5V/3A, 6.5-9V/2A, 19V-2V/1.5A
USB-A1: 2.1A
USB-A2: LED indication



49B

INPUT: 100-240V AC 50/60 Hz 1.3A
OUTPUT: 3.6V-6.5V/3A, 6.5-9V/2A, 19V-2V/1.5A
USB-A1: 2.1A
USB-A2: LED indication

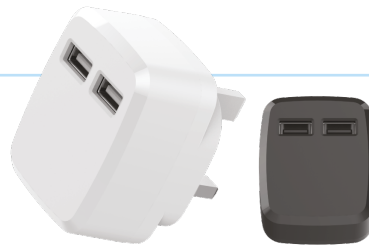

55A

INPUT: 100-240V AC 50/60 Hz 1.3A
OUTPUT: 3.6V-6.5V/3A, 6.5-9V/2A, 19V-2V/1.5A
USB-A1: 2.1A
USB-A2: LED indication



TRAVEL CHARGER



56A

INPUT: 100-240V AC 50/60 Hz 1.3A
 OUTPUT:
 USB-A1: 3.6V-6.5V/3A, 6.5-9V/2A, 19V-2V/1.5A
 USB-A2: 2.1A
 LED indication



57AG

INPUT: 100-240V AC 50/60 Hz 1.3A
 OUTPUT:
 USB-C1/C2: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/2.25A, PD45W
 USB-C1+C2: PD20W + PD20W
 TOTAL OUTPUT: 45W Max.



58A

INPUT: 100-240V AC 50/60 Hz 1.3A
 OUTPUT:
 USB-A1: 3.6V-6.5V/3A, 6.5-9V/2A, 19V-2V/1.5A
 USB-A2/A3: 2.1A



59A

INPUT: 100-240V AC 50/60 Hz 1.3A
 OUTPUT:
 USB-A1: 3.6V-6.5V/3A, 6.5-9V/2A, 19V-2V/1.5A
 USB-A2/A3: 2.1A
 LED indication



60A

INPUT: 100-240V AC 50/60 Hz 1.3A
 OUTPUT:
 USB-A1: 3.6V-6.5V/3A, 6.5-9V/2A, 19V-2V/1.5A
 USB-A2: 2.1A
 LED indication



63A

INPUT: 100V-240V AC 50/60 Hz 0.3A
 OUTPUT: DC5V 2.1A Max. 10.5W



TRAVEL CHARGER



67A

INPUT: 100-240V AC 50/60Hz 0.8A
 OUTPUT USB-A1/A2: 5V/2.1A Max, DC 5V/2.1A 10.5W
 USB-C: 5V/3A, 9V/2.22A, 12V/1.67A PD20W
 TOTAL OUTPUT: 30.5W Max.

PD 20W

USB-A x2
 USB-C x1




70A

INPUT: 100-240V AC 50/60 Hz 1.3A
 OUTPUT USB-C1/C2: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/2.25A, PD45W
 USB-C1+C2: PD20W + PD20W
 TOTAL OUTPUT: 45W Max.

Foldable Pin Design

GaN PD 45W

USB-C x2

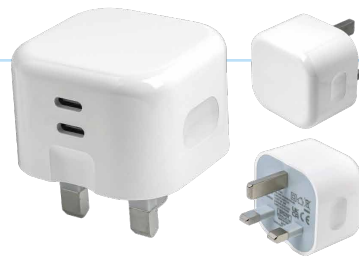


76A

INPUT: 100-240V AC 50/60 Hz 0.6A
 OUTPUT USB-C1/C2: 5V/3A, 9V/2.22A, 12V/1.67A, PD20W
 USB-C1+C2: 5V/3A,
 TOTAL OUTPUT: 20W Max.

PD 20W

USB-C x2

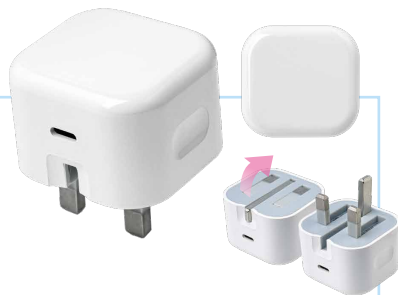


77A

INPUT: 100-240V AC 50/60 Hz 0.6A
 OUTPUT USB-C: 5V/3A, 9V/2.22A, 12V/1.67A, PD20W Max.

Foldable Pin Design

PD 20W

USB-C x1

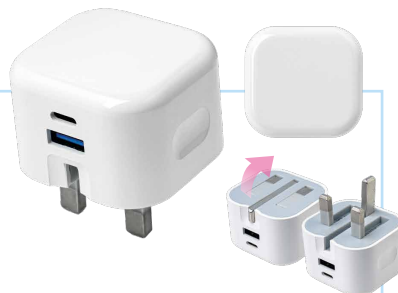

77AC


INPUT: 100-240V AC 50/60 Hz 0.6A
 OUTPUT USB-C: 5V/3A, 9V/2.22A, 12V/1.67A, PD20W
 USB-A: 5V/3A, 9V/2A, 12V/1.5A, QC3.0 18W
 USB-C+USB-A: 5V3A Max.
 TOTAL OUTPUT: 20W Max.

Foldable Pin Design

PD 20W

USB-A x1
 USB-C x1

TRAVEL CHARGER

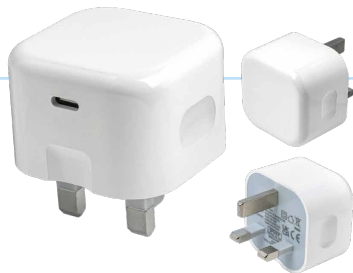

78A

INPUT: 100-240V AC 50/60 Hz 0.6A
OUTPUT USB-C: 5V/3A, 9V/2.22A, 12V/1.67A, PD20W Max.

PD 20W

USB-C
x1



78AC

INPUT: 100-240V AC 50/60 Hz 0.6A
OUTPUT USB-C: 5V/3A, 9V/2.22A, 12V/1.67A, PD20W
USB-A: 5V/3A, 9V/2A, 12V/1.5A, QC3.0 18W
USB-C+USB-A: 5V3A Max.
TOTAL OUTPUT: 20W Max.

PD 20W

USB-A USB-C
x1 x1



80AG



80BG



80UG

INPUT: 100-240V AC 50/60 Hz 1.5A
OUTPUT: USB-C1/C2: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A PD65W Max.
USB-A: 5V/3A, 9V/3A, 12V/3A, 20V/3A, QC3.0 60W Max.
USB-C1+C2: PD30W+PD30W
USB-C1+A: PD30W+QC18W
USB-C2+A: 5V/3A
USB-C1+(C2+A1): PD30W+5V/3A (C2+A1)
TOTAL OUTPUT: 65W Max.

GaN PD 65W

USB-A USB-C
x1 x2

TRAVEL CHARGER



81BG



81UG

INPUT: 100-240V AC 50/60 Hz 1.5A
 OUTPUT:
 USB-C: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A PD65W Max.
 USB-A: 5V/3A, 9V/2A, 12V/1.5A, QC3.0 18W Max.
 USB-C+A: PD45W+QC18W
 TOTAL OUTPUT: 65W Max.



82BG



82UG

INPUT: 100-240V AC 50/60 Hz 1.5A
 OUTPUT:
 USB-C1/C2: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A, PD 65W Max.
 USB-A: 5V/3A, 9V/2A, 12V/3A, 20V/3A, QC3.0 60W Max.
 USB-C1+C2: PD30W+PD30W
 USB-C1+A: PD30W+QC18W
 USB-C2+A: 5V/3A
 USB-C1+(C2+A1): PD30W+5V/3A (C2+A1)
 TOTAL OUTPUT: 65W Max.



83AG



INPUT: 100-240V AC 50/60 Hz 1.5A
 OUTPUT:
 USB-C1/C2: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A, PD65W Max.
 USB-A: 5V/3A, 9V/3A, 12V/3A, 20V/3A, QC3.0 60W Max.
 USB-C1+C2: PD30W+PD30W
 USB-C1+A: PD30W+QC18W
 USB-C2+A: 5V/3A
 USB-C1+(C2+A1): PD30W+5V/3A (C2+A1)
 TOTAL OUTPUT: 65W Max.



TRAVEL CHARGER



88AG



88BG



88UG

INPUT: 100-240V AC 50/60 Hz 1A
 OUTPUT USB-C: 5V/3A, 9V/3A, 12V/3A, 15V/2.4A,
 20V/1.8A, PD36W Max.
 USB-A: 5V/3A, 9V/2A, 12V/1.5A,
 QC3.0 18W Max.
 USB-C+USB-A: 5V3A Max.
 TOTAL OUTPUT: 36W Max.

PD 36W USB-A x1 USB-C x1




89UG

INPUT: 100-240V AC 50/60 Hz 1A
 OUTPUT USB-C: 5V/3A, 9V/3A, 12V/3A, 15V/2.4A,
 20V/1.8A, PD36W Max.
 USB-A: 5V/3A, 9V/2A, 12V/1.5A,
 QC3.0 18W Max.
 USB-C+USB-A: 5V3A Max.
 TOTAL OUTPUT: 36W Max.

PD 36W USB-A x1 USB-C x1

Travel Pack

TRAVEL CHARGER

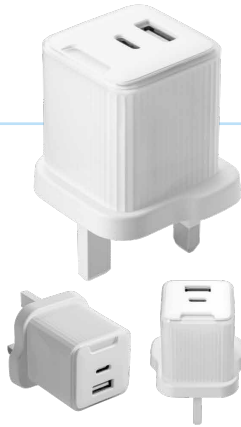

93AG



93BG



93UG

INPUT: 100-240V AC 50/60 Hz 0.7A
OUTPUT USB-C: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A,
20V/1.5A, PD30W Max.
USB-A: 5V/3A, 9V/2A, 12V/1.5A,
QC3.0 18W Max.
USB-C+USB-A: 5V3A Max.
TOTAL OUTPUT: 30W Max.



Foldable Pin
Design

85UG

INPUT: 100-240V AC 50/60 Hz 0.7A
OUTPUT USB-C: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A,
20V/1.5A PD30W Max.
USB-A: 5V/3A, 9V/2A, 12V/1.5A,
QC3.0 18W Max.
USB-C+A:
5V3A Max.
TOTAL OUTPUT: 30W Max.



TRAVEL CHARGER

91BG

INPUT: 100-240V AC 50/60 Hz 1.5A
 OUTPUT: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A PD65W Max.
 USB-A: 5V/3A, 9C/3A, 12V/3A, 20V/3A, QC3.0 60W
 USB-C1+C2: PD30W+PD30W
 USB-C1+A: PD30W+QC18W
 USB-C2+A: 5V/3A
 USB-C1+(C2+A1): PD30W+5V/3A (C2+A1)
 TOTAL OUTPUT: 65W Max.

GaN PD 65W

USB-A USB-C
 x1 x2

92UG

INPUT: 100-240V AC 50/60 Hz 1.5A
 OUTPUT: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A PD65W Max.
 USB-A: 5V/3A, 9C/3A, 12V/3A, 20V/3A, QC3.0 60W
 USB-C1+C2: PD30W+PD30W
 USB-C1+A: PD30W+QC18W
 USB-C2+A: 5V/3A
 USB-C1+(C2+A1): PD30W+5V/3A (C2+A1)
 TOTAL OUTPUT: 65W Max.

GaN PD 65W

USB-A USB-C
 x1 x2

✈ Travel Pack

Foldable Pin Design

94AG

94BG

94UG

INPUT: 100-240V AC 50/60 Hz 0.7A
 OUTPUT USB-C: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A, PD30W Max.
 USB-A: 5V/3A, 9V/2A, 12V/1.5A, QC3.0 18W Max.
 USB-C+USB-A: 5V3A Max.
 TOTAL OUTPUT: 30W Max.

PD 30W

USB-A USB-C
 x1 x1

TRAVEL CHARGER



97AG



97BG



97UG

INPUT: 100-240V AC 50/60 Hz 0.7A
OUTPUT USB-C: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A,
20V/1.5A, PD30W Max.




98UG

INPUT: 100-240V AC 50/60 Hz 0.7A
OUTPUT USB-C: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A,
PD30W Max.



TRAVEL CHARGER



Foldable Pin Design



Travel Pack

06UG

INPUT: 100-240V AC 50/60 Hz 1.5A

OUTPUT: USB-C1, USB-C2, USB-C3, USB-A

USB Output	C1 (PD/PPS)	C2 (PD/PPS)	C3 (PD/PPS)	A (QC3.0)
C1	PD100W	○	○	○
C2	○	PD100W	○	○
C3	○	○	PD100W	○
A	○	○	○	QC60W

USB Output	C1 (PD/PPS)	C2 (PD/PPS)	C3 (PD/PPS)	A (QC3.0)
C1+C2	PD60W	PD60W	○	○
C1+C3	PD60W	○	PD60W	○
C2+C3	○	PD60W	PD60W	○
C1+A	PD45W	○	○	QC60W
C2+A	○	PD45W	○	QC60W
C3+A	○	○	5Vdc/2.4A	5Vdc/2.4A

USB Output	C1 (PD/PPS)	C2 (PD/PPS)	C3 (PD/PPS)	A (QC3.0)
C1+C2+C3	PD60W	PD30W	PD30W	○
C1+C2+A	PD60W	PD30W	○	QC18W
C1+C3+A	PD60W	○	5Vdc/2.4A	5Vdc/2.4A
C2+C3+A	○	PD30W	5Vdc/2.4A	5Vdc/2.4A

USB Output	C1 (PD/PPS)	C2 (PD/PPS)	C3	A
C1+C2+C3+A	PD60W	PD30W	5Vdc/2.4A	5Vdc/2.4A

Note: ○ Not in use

PD 100W: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A, PPS: 5V-21V/5A

PD 60W: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3A, PPS: 5V-21V/3A, 5V-11V/5A

PD 30W: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A, PPS: 5V-21V/1.5A, 5V-11V/3A

QC 60W: 3.6V-20V/3A (QC 3.0), 3.4V-5.5V/5A (SCP)

Total output: 120W Max.

Compatible: PD3.0/QC4+/QC4.0/QC3.0/QC2.0/PPS/SCP/FCP/AFC/PE2.0/5FCP

