


User Manual

Manual Embossing Machine

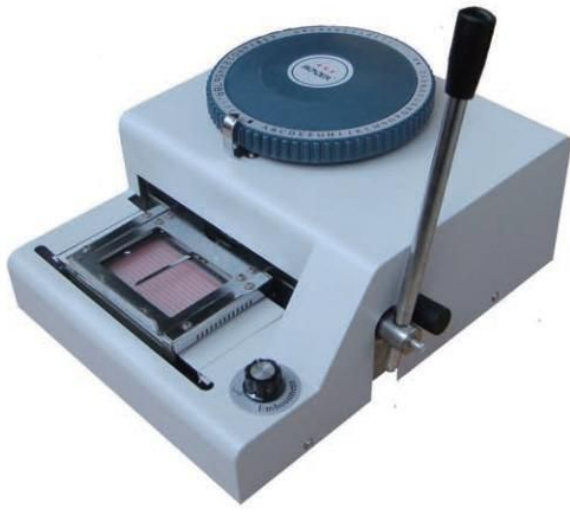

Product introduction

Manual embossing machine is the essential equipment of PVC card's post production and processing. Its function is to extrude protruding or receding characters to make PVC card with identifiability and uniqueness. Our PVC manual embossing machine owns reliable structure, accurate position, small volume, beautiful appearance and easy operation, Which is applicable to the small batch and many varieties cards' manufacturing for small stores, showbiz, food centers, stock exchange centers banks and insurance etc.



User's Manual

Product list


Model	Full Machine Name	Weights(kg)	Packing	Function
WSDM-68C	Card Manual Embossing Machine	NW:8.8 GW:11	340(L)*300(W)*180(H) (mm) Carton	PVC Card
WSDM-70C	Card Manual Embossing Machine	NW:8.8 GW:11	340(L)*300(W)*180(H) (mm) Carton	PVC Card
WSDM-10E	Card Manual Indent Machine	NW:8.8 GW:11	340(L)*300(W)*180(H) (mm) Carton	Indent Letter On Card/IDO Card
WSDM-72CE	Card Embossing&Indent Manual Machine	NW:9.0 GW:11	340(L)*300(W)*180(H) (mm) Carton	Extrude/Indent Letters On Card/IDO card
WSDM-75CE	Card Embossing&Indent Manual Machine	NW:9.0 GW:11	340(L)*300(W)*180(H) (mm) Carton	Extrude/Indent Letters On Card/IDO card
WSDM-80CE	Card Embossing&Indent Manual Machine	NW:9.0 GW:11	340(L)*300(W)*180(H) (mm) Carton	Extrude/Indent Letters On Card/IDO card

Main technical parameters

WSDM-68C models:

Applies workpiece: Normative PVC card, That be 85.5*55mm.

1. Character- selection: character rosette turnplate.
2. Inderal 68 code characters like the picture:
3. Adopting ISO international credit card special character.
4. 2 gears for word spacing gap :
1/7 inch
1/10 inch (only for small characters)
5. Operation mode: manual
6. Raised type lines: 1-11 line
7. Raised type location indication: indicator or sample card.
8. Volume (L*D*H) : 340*300*180 (mm)
9. Net weight of the machine: 8.8 kg

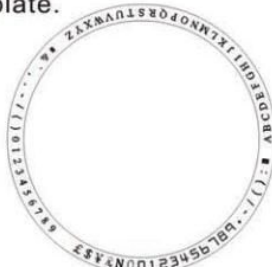

User's Manual 2

WSDM-72CE models:

Applies workpiece: Normative PVC card, That be 85.5*55mm.

1. Character- selection: character rosette turnplate.
2. Inderal characters include 62 pairs embossing codes and 0~9 of 10 italics codes. Embossing codes like the picture:
3. Character
In accordance with ISO international credit card standard.
4. 3 gears for word spacing gap :
1/7 inch
1/10 inch (only for small characters)
1/12 inch (for 0~9 italics numbers)
5. Operation mode: manual
6. Raised type lines: 1-11 lines
7. Raised type location indication: indicator or sample card
8. Volume (L*D*H) : 340*300*180 (mm)
9. Net weight of the machine: 9 kg



WSDM-75CE models:

Applies workpiece: Normative PVC card, That be 85.5*55mm.

1. Character- selection: character rosette turnplate.
2. Inderal characters include 55 pairs embossing codes; 0 of 10 italics codes and 0~9 of 10 pairs small embossing
Embossing codes like the picture:
3. Character
In accordance with ISO international credit card standard.
4. 3 gears for word spacing gap :
1/7 inch
1/10 inch (only for small characters)
1/12 inch (for 0~9 italics numbers)



User's Manual

5. Operation mode: manual
6. Raised type lines: 1-11 lines
7. Raised type location indication: indicator or sample card.
8. Volume (L*D*H) : 340*300*180 (mm)
9. Net weight of the machine: 9 kg

WSDM-80CE models:


Applies workpiece: Normative PVC card, That be 85.5*55mm.

1. Character- selection: character rosette turnplate.
2. Inderal characters include 70 pairs embossing codes and 0~9 of 10 italics codes. Embossing codes like the picture:
3. Character
In accordance with ISO international credit card standard.
4. 3 gears for word spacing gap :
1/7 inch
1/10 inch (only for small characters)
1/12 inch (for 0~9 italics numbers)
5. Operation mode: manual
6. Raised type lines: 1-11 lines
7. Raised type location indication: indicator or sample card.
8. Volume (L*D*H) : 340*300*180 (mm)
9. Net weight of the machine: 9 kg



ATTENTION:

1. Please use the PVC card (85mm×55mm) CR-80 stand
2. When tuning the characters plate, please don't drop down the hand-haft.
3. When switch the embossment size, please ward off the card frame slightly to avoid damage.
4. Never put hand or other hard objects into the machine.
5. Please move the card frame to the left end when not using the machine.
6. If the imprinted character may be deeper or shallower, undesirable, then it can be adjusted by adjusting screw in the regulation means: use the Z outside-hexagonal spanner along with the code sprinter to a little loose the hold-down nut, and then inside-hexagonal spanner with the code sprinter to adjust the middle regulating screw. Attention: turning the regulating screw in clockwise deepen the typed characters while clockwise turning m lighten the typed characters. After finishing, please use inside-hexagonal spanner with the code sprinter to ma regulating screw stable, and then use the Z outside-hexagonal spanner to fasten the hold-downscrew.



Package in the box